

City of Richland Resolution No. 100-20 temporarily designates virtual locations for all municipal meetings. This meeting will be held remotely via Zoom. Members of the public may attend this meeting by selecting the Zoom link or by calling the phone numbers provided.



Agenda
Planning Commission Workshop
Wednesday, November 10, 2021
Join the Zoom meeting [here](#)
Public Telephone Access: (206) 337-9723 or (253) 215-8782
Meeting ID No. 932 5084 5057

Commission Members: Chair Maier, Vice-Chair Townsend, and Commissioners Eadie, Mealer, Palmer, Ridley and Smith

Liaisons: Council Liaison Alvarez
Staff Liaison: Planning Manager Stevens

Regular Workshop - 6:00 p.m.

Call to Order/Attendance:

Agenda Items:

1. Proposed Amendment to RMC Section 23.28.030 to Add "Mini-Warehouse" to the List of Allowable Uses.
 - Mike Stevens, Planning Manager
2. Proposed Changes to the Badger Mountain South Land Use & Development Regulations (LUDR)
 - Mike Stevens, Planning Manager

Adjournment

The next Planning Commission Workshop is January 12, 2022

The next Planning Commission Meeting is December 8, 2021

Richland City Hall is ADA accessible. Requests for sign interpreters, audio equipment, and/or other special services must be received 48 hours prior to the meeting by calling the City Clerk's Office at 509-942-7389.



PLANNING COMMISSION AGENDA ITEM COVERSHEET

Meeting Date: 11/10/2021

Agenda Category: Agenda Items

Prepared By: Mike Stevens, Planning Manager

Subject:

Proposed Amendment to RMC Section 23.28.030 to Add "Mini-Warehouse" to the List of Allowable Uses.

Request:

Core Focus Area 3 - Increase Economic Vitality

Recommended Motion:

Summary:

Amend RMC 23.28.030 to add "Mini-Warehouse" to the list of Business and Personal Service Uses that are permitted within the Business Research Park (B-RP) Zone.

Attachments:

1. CA2021-109 Proposed Zoning Code Amendment
2. CA2021-109 Application

Proposed B-RP Zoning Code Amendment – SMI Group XV, LLC

August 23, 2021

Is the proposed amendment consistent with the applicable provisions of the comprehensive Plan? Is a comprehensive plan amendment necessary to implement the proposed amendment?

No comprehensive plan amendment is needed to implement the proposed zoning code amendment. There are several goal and policy statements that support the proposed action. The City's Economic Development Plan identifies the close monitoring of zoning and land use as a key opportunity. The plan states: *"To ensure zoning is responsive to market conditions, it should be monitored periodically to evaluate potential hindrances. Working to concentrate development in areas with existing infrastructure and near job centers will be instrumental to optimize the City's funding."*

As noted in the attached presentation, the current Business Research Park zoning severely limits development opportunities for some B-RP landowners and has become a hindrance. The proposed amendment provides some relief for this circumstance.

Economic Development Goal #6 states: **Encourage vibrant mixed-use areas in Tri-Cities as destinations to live, work, and visit.** Policies 6 thru 8 read as follows:

Policy 6: Expand the range of options for housing in areas planned for higher density development.

Policy 7: Support development of higher density housing.

Policy 8: Attract young professionals by promoting their preferred types of job, housing, and entertainment options.

The B-RP zone is intended to promote areas where people can both live and work. There are both job centers and housing complexes present there that help to implement this goal. However, with higher density multi-family housing comes a need for mini warehouse facilities. Amending the code to allow for mini warehouses in the B-RP zone would result in these types of facilities being in convenient proximity to housing centers, thereby providing a needed amenity to multi-family housing and working to support higher density housing and the needs of young professionals.

Finally, Land Use Goal #2 states: **"Establish land uses that are sustainable and create a livable and vibrant community."**

Policy 1: Maintain a variety of land use designations to accommodate appropriate residential, commercial, industrial, healthcare, educational, recreational, and open space uses that will take advantage of the existing infrastructure network.

Mini warehouse facilities are a needed and desirable secondary or accessory use to higher density residential living. It is entirely appropriate to allow mini warehouse facilities near multi-family residential complexes. Doing so does make for a more livable community and takes advantage of the existing infrastructure network in a way that is consistent with this goal.

Proposed SMI Group XV LLC Code Amendment

August 23, 2021

Note: Proposed language changes shown in red, italicized, underlined type.

Chapter 23.28 BUSINESS ZONING DISTRICTS

Sections:

- 23.28.010 Purpose of business use districts.**
- 23.28.020 Business performance standards and special requirements.**
- 23.28.025 Enforcement of performance standards.**
- 23.28.030 Business use districts permitted land uses.**
- 23.28.040 Site requirements for business use districts.**
- 23.28.050 Parking standards for business use districts.**
- 23.28.060 Landscaping requirements.**

23.28.010 Purpose of business use districts.

A. The business research park use zoning classification (B-RP) is intended to provide locations for a range of business research and business park uses, including office and administrative uses, designed to be conducted wholly within enclosed buildings. It is also a purpose of this zoning classification to protect a portion of the existing industrial land base for research park facility development, which provides high-technology employment opportunities. Light manufacturing uses that complement the business park or research park use that are free from offense in the form of odor, dust, gas, fumes, smoke, soot, heat, glare, explosions, liquids, waste, noise, vibrations, and disturbances in this use district may be permitted if pertinent to the primary use. The business research park zoning classification provides opportunities for employment in modern, attractive buildings on well-landscaped sites which may be close to residential areas, thereby resulting in a reduction of travel time to and from work. Campus type developments that include several buildings with a mix of uses that are related to the primary businesses are encouraged. This zoning classification is intended to be applied to those portions of the city that are designated business research park under the city of Richland comprehensive plan.

B. The business and commerce use zoning classification (B-C) is intended to provide locations for a range of business and commerce uses, in a business park setting, where such uses are in close proximity to residential lands. It is also a purpose of this zoning classification to place appropriate use limitations and restrictions on business and commerce uses to ensure the

protection of nearby residential uses. Areas of restriction include such items as increased building setbacks, stringent landscaping standards, restrictions on outdoor storage, architectural controls, outdoor lighting standards and access controls. The business and commerce zoning classification provides opportunities for employment in modern, attractive buildings on well-landscaped sites which may be close to residential areas, thereby resulting in a reduction of travel time to and from work. Developments that include several businesses with integrated building architecture, landscaping, and infrastructure are encouraged. This zoning classification is intended to be applied to some portions of the city that are designated industrial under the city of Richland comprehensive plan. [Ord. 28-05 § 1.02].

23.28.020 Business performance standards and special requirements.

A. B-RP Business Research. It is the intent of this section that:

1. Uses shall be conducted entirely within enclosed buildings;
2. On- and off-site hazardous waste treatment and storage facilities shall be located a minimum of 300 feet from surface water, residential zones and public gathering places;
3. Public pedestrian access around and through a site is encouraged and should include clearly marked travel pathways from the public street, through parking areas, to primary building entries;
4. Development of a trail system through landscaped areas is encouraged and should, where possible, connect to trail systems on adjacent sites; and
5. No more than 15 percent of the total number of acres in the B-RP zone or within a specific business park shall be developed with commercial uses. The applicant proposing a commercial use shall identify the properties that he/she is relying on to comply with this requirement. In the event that the applicant is relying upon property(ies) that are not under the ownership of the applicant, then the applicant shall submit a written statement to the city signed by the affected property owners consenting to the application for a commercial use.

B. B-RP Residential, Day Care and Preschool Standards.

1. Residential development is permitted in the B-RP zone at an average density of eight dwellings per acre within a business park. Average density shall be determined by a calculation of the total land area (in acres) within a business park that are both developed and proposed for development with residential uses divided by the total number of dwelling units that are both developed and proposed for development. Any residential development approved through a special use permit must maintain a minimum density of

six dwelling units per acre. Construction of residential units shall proceed as identified or conditioned in a special use permit approved by the Richland hearing examiner;

2. Detached single-family dwellings are prohibited unless:

a. Detached single-family dwellings are part of a residential development as approved through the special use permit process, in which no more than 25 percent of the total number of dwelling units approved through the special use permit are detached single-family dwellings; and

b. Detached single-family dwellings are a part of a common maintenance program, such as a homeowners' association, with attached conditions, covenants and restrictions to be approved by the city at the time of development and recorded by deed to run in perpetuity to the individual properties;

3. Dwelling units may be incorporated into a building occupied by a nonresidential use;

4. No more than 20 percent of the total number of acres in the B-RP zone or within a specific business park or master planned area shall be developed exclusively for residential uses. The applicant for a residential use project shall identify the properties that he/she is relying upon to comply with this requirement. In the event that the applicant is relying upon property(ies) that are not under the ownership of the applicant, then the applicant shall submit a written statement from the affected property owners consenting to the application for an exclusive residential use;

5. No site developed exclusively for residential uses shall exceed 10 acres in area;

6. No parcel or parcels of property developed exclusively for residential uses shall be contiguous to any other parcel or parcels of property developed exclusively for residential uses, if the combined total of all contiguous parcels developed exclusively for residential uses exceeds 20 acres in area;

7. Mixed use buildings that contain permitted uses (as identified in RMC 23.28.030) on the main floor of the building and residential uses on the upper floors of the building are permitted without regard to subsections (B)(4) through (6) of this section. All other provisions regulating the placement of residential uses in the B-RP zone shall apply;

8. Day care and preschool uses are permitted without regard to subsections (B)(4) through (6) of this section. All other provisions regulating the placement of day care and preschool uses in the B-RP zone shall apply;

9. Residential projects in the B-RP zone shall include provisions to connect with permitted uses in the zone which have the effect of minimizing the need for automotive commutes. Such connections may include shared open space, pedestrian trails, computer and/or

communication links between buildings, or other similar features. Residential projects should also be designed to be compatible with the architectural character of existing, adjacent business parks;

10. Parking for residential structures shall be required in addition to any requirement for other permitted uses on the site; and

11. The applicant shall ensure that an emergency response plan is prepared by Benton County emergency services and that such emergency response plan is implemented prior to or simultaneously with the issuance of a certificate of occupancy for a project.

a. Prior to the submittal of a special use permit, the applicant shall consult with Benton County emergency services to determine the following:

i. The specific hazards to residential, day care and/or preschool populations that exist in the vicinity of the project site resulting from existing industrial land uses in the general area. Such hazards shall be determined and assessed through the review of risk management hazard plans that are on file with Benton County emergency services;

ii. The parameters of the emergency services plan that are necessary to support the proposal. Such plan will at a minimum address the following:

(A) Provisions for emergency notification;

(B) Identification of evacuation routes;

(C) Identification of special populations that may reside or be located within the proposed project (small children, seniors, individuals with mobility restrictions, etc.) for identification of specific provisions to address the safety of these special populations;

iii. Identification of any plans for sheltering residential populations during an emergency event and any specific building or site design features to be incorporated into the project to mitigate potential hazards created by nearby industrial facilities; and

iv. Identification of plans to inform the future residents of the residential project of the specific emergency notification procedures and actions that would be taken during an emergency event.

b. Following completion of the consultation process, the applicant shall obtain a written statement from Benton County emergency services that either:

- i. Indicates that the proposed project site is located outside of any known hazard area which represents a threat to residential, day care or preschool populations as identified in the risk management plans on file with Benton County emergency services and that the requirement for a specific emergency response plan is waived; or
- ii. Identifies the known hazards to residential, day care or preschool populations that are known to exist in or near the project site. Such report shall identify the specific mitigation measures that will be included in the emergency response plan. The applicant shall sign a statement acknowledging and agreeing to the mitigation measures included in the emergency response plan.
- iii. The applicant is required to provide any information requested by Benton County emergency services for the preparation of an emergency response plan.

C. B-C Business Commerce. It is the intent of this section that:

- 1. Uses shall be conducted primarily within enclosed buildings.
- 2. On-site hazardous waste treatment and storage facilities shall be located a minimum of 300 feet from surface water, residential zones and public gathering places.
- 3. Development of a trail system through landscaped areas is encouraged and should, where possible, connect to adjoining trail systems and public sidewalks.
- 4. Uses shall not inflict upon the surrounding properties smoke, dirt, glare, vibrations, or noise beyond the maximum permissible levels hereby established:
 - a. Vibration. Every use shall be so operated that the ground vibration inherently and recurrently generated from equipment other than vehicles is not perceptible without instruments at any point on or beyond any lot line of the property on which the use is located.
 - b. Toxic and Noxious Gases. No emission which would be demonstrably injurious to human health, animals or plant life common to the region, on the ground at or beyond any lot line on which the use is located will be permitted. Where such emission could be produced as a result of accident or equipment malfunction, adequate safeguards standard for safe operation in the industry involved shall be taken. This shall not be construed to prohibit spraying of pesticides on public or private property in accordance with state regulations as set forth in WAC Title 173, as codified or as hereinafter amended.
 - c. Heat, Glare and Humidity (Steam). In the B-C district any activity producing humidity in the form of steam or moist air, or producing heat or glare shall be carried

on in such a manner that the heat, glare or humidity is not perceptible at any lot line on which the use is located. Building materials with high light reflective qualities shall not be used in the construction of buildings in such a manner that reflected sunlight will throw intense glare on areas surrounding the B-C district. Artificial lighting shall be hooded or shaded so that direct light of high intensity lamps will not result in glare when viewed from areas surrounding the B-C district.

d. Fire and Explosive Hazards. The storage, manufacture, use, or processing of flammable liquids or materials which produce flammable or explosive vapors or gases shall be permitted in accordance with the regulations of the fire prevention code and the building code of the city of Richland as set forth in the International Building Code and International Fire Code as adopted by the city of Richland or as hereinafter amended.

5. Wherever the B-C zone is applied to any property or properties, there shall be site design standards put in place that shall regulate the appearance of buildings within the B-C district. This requirement for site design standards shall be met in one of the following ways:

a. The property or properties that are part of the B-C zone shall also be subject to the standards set forth in subsection (D) of this section; or

b. The property or properties that are part of the B-C zone shall be subject to private conditions, covenants, and restrictions as proposed by applicants for a zone change proposal. Said conditions, covenants and restrictions shall include site design standards that are deemed appropriate for the intended character, appearance and physical characteristics of the property or properties that are a part of the B-C zone and the immediate vicinity. Such conditions, covenants, and restrictions shall be recorded at the time the zone change ordinance is approved and shall be binding on all new development that occurs on the property or properties that are a part of the B-C zone. Such conditions, covenants, and restrictions shall not be amended without the approval of the city of Richland.

D. B-C Site Design Standards. The following standards apply to the design of buildings within the B-C zone:

1. Building Design.

a. Wall planes shall not run in one continuous direction for more than 60 feet without an offset or setback in the building face, unless the building face contains windows, alcoves, canopies, cornices, cupolas, or similar architectural features.

b. At least 25 percent of the wall area fronting on a street should be occupied with windows, alcoves, canopies, cornices, cupolas, or similar architectural features.

c. Large buildings should have height variations to give the appearance of distinct elements.

d. Rooftop or outdoor mechanical equipment shall be fully screened from public view in a manner which is architecturally integrated with the structure. Screening shall be constructed to a finished standard using materials and finishes consistent with the rest of the building.

e. Roof-mounted equipment should be painted a compatible color with the roof screen.

f. Exterior building colors should be subdued. Primary colors or other bright colors should generally be used only as accents to enliven the architecture.

g. Reflective glass is not permitted for glazing.

h. Buildings whose exterior surfaces are more than 50 percent comprised of metal, excluding roof surfaces, are not permitted.

2. Loading and Service Areas.

a. Truck docks and loading areas shall not be permitted on the side of the building that faces or abuts a public street.

b. Refuse areas and service areas shall be screened from view of the public street.

3. Site Lighting.

a. Lighting should be used to provide reasonable illumination for the security and safety of on-site areas such as parking, loading, shipping, and pathways.

b. Lighting shall be designed to minimize glare or objectionable effects to adjacent properties.

c. Site lighting poles shall not exceed 20 feet in height and shall direct the light downward.

d. Lighting sources shall be shielded from adjacent properties.

4. On-Site Utilities.

a. All site utilities shall be placed underground.

b. Pad mounted equipment shall be appropriately located and screened in a manner consistent with required access and safety requirements.

5. Alternative Design. In the event that a proposed building and/or site does not meet the literal standards identified in this section, a property owner may apply to the Richland planning commission for a deviation from these site design standards. The Richland planning commission shall consider said deviation and may approve any deviation based on its review and a determination that the application meets the following findings:

a. That the proposal would result in a development that offers equivalent or superior site design than conformance with the literal standards contained in this section;

b. The proposal addresses all applicable design standards of this section in a manner which fulfills their basic purpose and intent; and

c. The proposal is compatible with and responds to the existing or intended character, appearance, quality of development and physical characteristics of the subject property and immediate vicinity. [Ord. 28-05 § 1.02; Ord. 07-11 § 1.01; Ord. 55-15 § 2; Ord. 48-17 § 3].

23.28.025 Enforcement of performance standards.

It is the intent of this section that:

A. If in the opinion of the administrative officials a violation of the performance standards in RMC 23.28.020 has occurred, the administrative official shall send a written notice of the violation to the owners of the property and the manager of the operation involved by certified mail. The manager or responsible person shall have 30 days to correct the violation, unless in the opinion of the administrative official there is imminent peril to the life and property of persons adjacent to the alleged violation, in which case the violation shall be corrected immediately.

B. Where determinations of violation can be made by the administrative official using equipment normally available to the city or obtainable without extraordinary expense, such determination shall be so made before notice of violation is issued.

C. Where technical complexity or extraordinary expense make it unreasonable for the city to maintain the personnel or equipment necessary to make the determination of violation, then the city shall call in properly qualified experts to make the determination. If expert findings indicate a violation of the performance standards, the costs of the determination shall be assessed against the properties or persons responsible for the violation in addition to the other penalties prescribed by this title. If no violation is found, cost of the determination shall be paid entirely by the city. [Ord. 28-05 § 1.02].

23.28.030 Business use districts permitted land uses.

In the following chart, land use classifications are listed on the vertical axis. Zoning districts are listed on the horizontal axis.

A. If the symbol "P" appears in the box at the intersection of the column and row, the use is permitted, subject to the general requirements and performance standards required in that zoning district.

B. If the symbol "S" appears in the box at the intersection of the column and row, the use is permitted subject to the special use permit provisions contained in Chapter 23.46 RMC.

C. If the symbol "A" appears in the box at the intersection of the column and the row, the use is permitted as an accessory use, subject to the general requirements and performance standards required in the zoning district.

D. If a number appears in the box at the intersection of the column and the row, the use is subject to the general conditions and special provisions indicated in the corresponding note.

E. If no symbol appears in the box at the intersection of the column and the row, the use is prohibited in that zoning district.

Land Use	B-RP	B-C
Automotive, Marine and Heavy Equipment Uses		
Automotive Repair – Major		P
Automotive Repair – Minor		P
Automotive Repair – Specialty Shop		P
Automobile Service Station	P	P ¹⁴
Bottling Plants	P	P
Car Wash – Automatic or Self-Service		P ¹
Fuel Station/Mini Mart	P	P ¹⁴
Business and Personal Services		
Automatic Teller Machines	P	P
General Service Businesses	P	P
Health/Fitness Facility	P	P
Health/Fitness Center	P	P
Laundry/Dry Cleaning, Retail	P	P
<u>Mini-Warehouse</u>	<u>p^{2,16}</u>	P ²

Land Use	B-RP	B-C
Mailing Service	P	P
Personal Loan Business	P	P
Personal Services Businesses	P	P
Photo Processing, Copying and Printing Services	P	P
Telemarketing Services	S	P
Video Rental Store	P	P
Food Service		
Cafeterias	A	A
Delicatessen	A	A
Drinking Establishments	P	P
Portable Food Vendors	P ³	P ³
Restaurants/Drive-Through	A ⁴	A ⁴
Restaurants/Lounge	P	P
Restaurants/Sit Down	P	P
Restaurants/Take Out	P	P
Restaurants with Entertainment/Dancing Facilities	P	P
Vehicle-Based Food Service	P ¹⁵	P ¹⁵
Industrial/Manufacturing Uses		
Light Manufacturing Uses	P	P
Research, Development and Testing Facilities	P	P
Warehousing, Storage and Distribution		A
Wholesale Facilities and Operations		P
Office Uses		
Financial Institutions	P	P
Medical, Dental and Other Clinics	P	P
Newspaper Offices and Printing Works		P
Office – Consulting Services	P	P
Office – Corporate	P	P
Office – General	P	P
Office – Research and Development	P	P
Radio and Television Studios		P
Schools, Commercial	P	P

Land Use	B-RP	B-C
Schools, Trade	P	P
Travel Agencies	P	P
Public/Quasi-Public Uses		
Alternative Schools		P ⁵
Churches		P ⁶
Clubs or Fraternal Societies		P ⁶
Cultural Institutions		P ⁶
General Park Operations and Maintenance Activities	P	P
Passive Open Space Use	P	P
Power Transmission and Irrigation Wasteway Easements and Utility Uses	P ⁷	P ⁷
Public Agency Buildings	P ⁷	P ⁷
Public Agency Facilities	P ⁷	P ⁷
Public Parks	P	P
Special Events Including Concerts, Tournaments and Competitions, Fairs, Festivals and Similar Public Gatherings	P	P
Trail Head Facilities	P	P
Trails for Equestrian, Pedestrian, or Nonmotorized Vehicle Use	P	P
Residential Uses		
Accessory Dwelling Unit	A	A
Apartment, Condominium (3 or More Units)	S ⁸	
Day Care Center	S ^{8,9}	A ⁹
Designated Manufactured Home	S ^{8,10,11}	
Dormitories, Fraternities, and Sororities	S ⁸	
Dwelling, One-Family Attached	S ^{8,10,11}	
Dwelling, One-Family Detached	S ^{8,10,11}	
Dwelling, Duplex	S ⁶	
Dwelling Units for a Resident Watchman or Custodian	A	A
Hotels or Motels	S ⁸	P
Nursing or Rest Home		P
Temporary Residence	P ^{8,10}	P ¹⁰
Retail Uses		
Parking Lot or Structure	P	P

Land Use	B-RP	B-C
Department Stores		P
Specialty Retail Stores	P	P
Miscellaneous Uses		
Bus Terminal	P	P
Bus Transfer Station	P	P
Community Festivals and Street Fairs	P	P
Convention Center	P	P
Farming of Land	P	P
Macro-Antennas	P	P
Monopole	P ¹²	S ¹²
Outdoor Storage	P ¹³	P ¹³
Storage in an Enclosed Building	P	P

1. RMC 23.42.270

2. RMC 23.42.170

3. RMC 23.42.185

4. RMC 23.42.047

5. RMC 23.42.260

6. RMC 23.42.050

7. RMC 23.42.200

8. RMC 23.28.020(B)

9. RMC 23.42.080

10. RMC 23.42.110

11. RMC 23.18.025

12. Chapter 23.62 RMC

13. RMC 23.42.180

14. Permitted when located adjacent to a principal or minor arterial street as identified in Chapter 12.02 RMC, Street Functional Classification Plan.

15. RMC 23.42.325

16. Building design of mini-warehouses within the B-RP district shall conform to the following requirements:

a. Exterior building colors should be subdued. Primary colors or other bright colors should generally be used only as accents to enliven the architecture.

b. Exterior building surfaces shall be comprised of a mixture of building materials. Exterior wall surfaces shall not be primarily comprised of metal siding.

c. No more than 5% of the total land area within the B-RP district shall be devoted to mini-warehouse uses.

d. Mini warehouses shall be enclosed on all sides with a wall, landscape hedge or combination thereof at least 6' in height.

23.28.040 Site requirements for business use districts.

In the following chart, development standards are listed on the vertical axis. Zoning districts are listed on the horizontal axis. The number appearing in the box at the intersection of the column and row represents the dimensional standard that applies to that zoning district.

Standard	B-RP	B-C
Minimum Lot Area	None	None
Maximum Site Area (in acres)	Varies ¹	None
Minimum Density – Dwelling units/acre	6 units per acre	N/A
Average Density – Dwelling units/acre	8 units per acre	N/A
Minimum Front Yard Setback	Varies ²	Varies ³
Minimum Side Yard Setback	Varies ⁴	Varies ³
Minimum Rear Yard Setback	20 feet ⁵	Varies ³
Maximum Building Height – Main Building	55 feet ⁶	45 feet ⁷

1. Retail and service uses shall be clustered on sites no larger than five acres in size. Sites devoted exclusively to residential uses shall be located on sites no larger than 10 acres in size. Other permitted uses do not have a maximum site area.

2. The front yard setback area shall be landscaped. The front yard setback for all uses except residential uses shall be 25 feet. Residential uses shall maintain the following front yard setbacks:

a. Front yard to living area and/or side of garage: 10 feet.

b. Front yard to garage door: 20 feet.

c. Front yard to covered porch and/or deck: 10 feet.

3. The following minimum setbacks shall apply in the B-C zoning district:

a. Wherever a B-C zoned property abuts any property or properties that are a part of any PPF, SAG, R-1-12, R-1-10, R-2, R-2S, R-3 or residential PUD, a minimum building setback of 50 feet shall be provided, except that whenever a B-C zoned property abuts any property that is designated as single-family residential overlay within the Island View subarea plan, setbacks as set forth in subsection (c) of this footnote shall apply.

b. Where property lines of a parcel in the B-C district are not adjacent to properties located in other zoning districts, or are adjacent to a public right-of-way or to M-2, I-M, B-RP, or C-3 zoned properties, the following minimum yard requirements shall apply:

i. Front yard – 20 feet.

ii. Side yard – zero feet.

iii. Rear yard – zero feet.

c. Wherever a B-C zoned property abuts any property or properties that are part of a C-1, C-2, C-LB, CBD, WF or AG zones or wherever a B-C zoned property abuts any property that is designated as single-family residential overlay within the Island View subarea plan, the following minimum yard requirements shall apply:

i. Front yard – 20 feet.

ii. Side yard – 10 feet.

iii. Rear yard – 10 feet.

4. The side yard setback for all uses except commercial and residential uses is 20 feet. The side yard setback for multiple-family dwelling units is one foot of side yard per three feet of building height. The side yard setbacks for single-family detached dwelling units and an unattached side of attached dwelling units shall be five feet. The side yard setback for commercial uses is 20 feet when the adjoining property is developed with noncommercial uses and zero feet when the adjoining property is developed with commercial uses or a parking lot.

5. The rear yard setback for all uses except residential uses shall be 20 feet, except when commercial uses adjoin property that is developed with other commercial uses or a parking lot, then the rear yard setback shall be zero feet. Residential uses shall have a minimum rear yard setback of 10 feet.

6. Maximum Building Height. No building in a B-RP district shall exceed 55 feet in height. The planning commission may authorize an increase in building height to a maximum height of 100 feet, based upon a review of the structure and a finding that the proposed building is aesthetically pleasing in relation to buildings and other features in the vicinity and that the building is located at sufficient distance from the Columbia River to avoid creating a visual barrier. Exception: Private communications facilities may exceed the height limitation.

7. No building in a B-C district shall exceed 45 feet in height. The planning commission may authorize an increase in building height to a maximum height of 55 feet, based upon a review of the structure and a finding that the proposed building is aesthetically pleasing in relation to buildings and other features in the vicinity and that the building would be situated in a fashion so as not to interfere with views from surrounding properties. Exception: Private communications facilities may exceed the height limitation.

[Ord. 28-05 § 1.02; Ord. 04-09; Ord. 20-09; amended during 2011 recodification].

23.28.050 Parking standards for business use districts.

Off-street parking space shall be provided in all industrial zones in compliance with the requirements of Chapter 23.54 RMC. [Ord. 28-05 § 1.02].

23.28.060 Landscaping requirements.

A. In the B-RP zoning district, the following minimum landscaping requirement applies: At least 25 percent of a business park shall be landscaped. Landscaped areas may incorporate pedestrian amenities such as meandering pathways or trails, street furniture such as benches, public art features or similar features. Specific parcels of property within a business park do not have to meet the required percentage of landscaping; provided, that the overall business park maintains the minimum landscaping requirement of 25 percent for all developed parcels within the park; provided further, that parking lot landscaping as required in RMC 23.54.140 and landscaping within a required front yard shall be required in all cases.

B. The following landscaping standards apply to the development of property within the B-C district.

1. All off-street parking areas designed for employee and/or customer parking shall be paved and shall meet the landscape standards set forth in RMC 23.54.140. Parking/loading dock areas designed for truck maneuvering, parking and/or loading shall meet the requirements for perimeter landscaping only. No interior landscaping for truck parking/loading areas shall be required.

2. Wherever a B-C zoned property abuts any property or properties that are a part of any PPF, SAG, R-1-12, R-1-10, R-2, R-2S, R-3 or residential PUD zone, a landscape buffer strip a minimum of 25 feet in width shall be provided, except that B-C zoned property that abuts any property or properties that are designated as single-family residential overlay within the Island View subarea plan shall be exempt from this requirement. Perimeter landscape strips required for off-street parking areas, as set forth in RMC 23.54.140, may be included within the required landscape buffer. Evergreen and deciduous trees, of which no more than 40 percent of the trees may be deciduous, shall be planted within the required landscape buffer. A minimum of five trees per 1,000 square feet of buffer area shall be required. The landscape buffer is intended as a screen, and need not completely obscure the development.

3. A landscape buffer strip a minimum of 10 feet in width shall be provided adjacent to any public right-of-way. Perimeter landscape strips required for off-street parking areas, as set forth in RMC 23.54.140, may be included within the required landscape buffer.
4. All areas not covered by buildings, paved parking areas or sidewalks or other pedestrian paths shall be landscaped.
5. All landscaped areas shall be served by an underground irrigation system or shall be provided with a readily available water supply with at least one outlet located within 150 feet of all plant material requiring irrigation.
6. All delivery truck and maintenance vehicle parking areas, all truck dock and loading areas, all refuse and service areas and all outdoor storage areas shall be screened by means of a sight-obscuring fence or sight-obscuring landscaping materials or a combination of landscaping and fencing materials that together create a six-foot-tall sight-obscuring screen. Outdoor storage shall not extend above the height of the sight-obscuring screen.
7. Landscaped areas may incorporate pedestrian amenities such as meandering pathways or trails, street furniture such as benches, public art features or similar features.
8. Wherever trees are required in landscape buffer strips, the following minimum standards shall apply: Evergreen trees shall be a minimum height of five feet at the time of planting. Deciduous trees shall be a minimum height of 10 feet at the time of planting. [Ord. 28-05 § 1.02; Ord. 20-09].

SMI GROUP XV, LLC - PROPOSED B-RP ZONING CODE AMENDMENT

Proposal

SMI Group XV, LLC ("SMI XV") is the owner of an 11.5-acre property located south of Smart Park and east of Garlick Boulevard within the Business Research Park (B-RP) zone. They are proposing to add mini-warehouses as a permitted use within the B-RP. This proposed amendment would also include a list of design criteria to ensure the aesthetics of any mini-warehouse project would remain compatible with adjacent B-RP uses. The proposed code amendment would give SMI XV a viable development project for their property, which they currently lack.

Slide 1: SMI GROUP XV, LLC - Property Vicinity Map



Purpose

RMC 23.28.010A identifies the purpose of the Business Research Park (B-RP) zone as follows:

- The business research park use zoning classification (B-RP) is intended to provide locations for a range of business research and business park uses, including office and administrative uses;
- It is also a purpose of this zoning classification to protect a portion of the existing industrial land base for research park facility development;
- Light manufacturing uses that complement the business park or research park uses that are free from offense in the form of odor, dust, gas, fumes, smoke, soot, heat, glare, explosions, liquids, waste, noise, vibrations, and disturbances in this use district may be permitted;
- The business research park zoning classification provides opportunities for employment in modern, attractive buildings on well-landscaped sites which may be close to residential areas, thereby resulting in a reduction of travel time to and from work.

History

The creation of the B-RP zone began in the early 2000's when the zone was formed to encompass the Science and Technology Park, which was first identified in the City's 1998 comprehensive plan. The zone was formed to encourage office and research park facility uses. To that extent, it has been successful. The expansion of the Pacific Northwest National Laboratories ("PNNL") campus has been the most significant development since then. There has also been considerable construction of office buildings housing a variety of DOE contractors engaged in various aspects of the Hanford cleanup operations. Additionally, there have been several housing projects built within the B-RP zone. However, development activity in the recent past has slowed significantly, with almost half of the total acreage within the B-RP zone remaining undeveloped.

Existing Uses within the B-RP Zone

Table 1 below is based on Benton County Assessor's data. Acreage totals are based on the 73 parcels that comprise the Business Research Park (B-RP) district. Some larger parcels are partially developed, so the areas of vacant and developed acreage were estimated using the measuring tools available on the Assessor's mapping program.

Table 1. Land Uses & Acreage Within the B-RP Business Research Park Zone

Land Use	Acreage	Percent of Total
Undeveloped	344	47.4%
Office ¹	319	44.2%
Residential ²	24.5	3.3%
Parking ³	16	2.2%
Landscaping ⁴	11	1.5%
Industrial ⁵	6	0.8%
Commercial ⁶	4	0.6%
Total	724.5	100.0%

¹Office category includes both administrative office uses and research facilities.

²Residential uses include University Condominiums, Sienna Sky Village, The Commons and The Lofts apartment complexes, and The Guest House at PNNL.

³Parking is typically provided on the same parcel as the primary use; however, in a few instances, a parking lot is located on a separate parcel with an office building located on an adjacent parcel. The acreage reported here reflects only the acreage of parcels entirely devoted to parking.

⁴Zoning requirements mandate that 25% of land area in the B-RP zone be landscaped. Most commonly, this requirement is met on a parcel-by-parcel basis, but a few parcels have been entirely set aside to meet the landscaping requirement. Listed is the acreage devoted entirely to landscaping.

⁵Industrial uses consist only of the Ingredion facility.

⁶Commercial uses include a restaurant, a day care and a Montessori School.


Potential for Future B-RP Land Uses

Although office uses are the predominant category within the B-RP zone, the potential for further office development is limited for the foreseeable future for the following reasons:

- A. The Department of Energy ("DOE"), whose contractors lease the great majority of office space within the B-RP zone, has determined that it will own its own office spaces in the future rather than lease them. This means that any new DOE office construction will take place on DOE property either inside or outside the B-RP zone. This has reduced new office construction, evidenced by there being no private office buildings constructed within the B-RP zone during the last six (6) years. Efforts are currently underway by the DOE to annex an additional 300 acres into the City of Richland, underlining their determination to build future facilities on their own land, rather than leasing.

- B. There are 212,558 square feet of office space currently available for lease in Richland and 213,184 square feet of office space for sale. There is overlap in these numbers because some properties are offered for both sale and lease. This large backlog of empty office properties will need to be filled prior to more office construction becoming feasible, which will take many years.
- C. The current economic circumstance reduces the potential for new office construction throughout the Tri-Cities. Nationally, the COVID pandemic has resulted in a huge increase in office vacancy rates illustrated on Slide 2.

Slide 2:
Office Vacancy Rates in the US from 2nd Quarter 2019 to 1st Quarter 2021

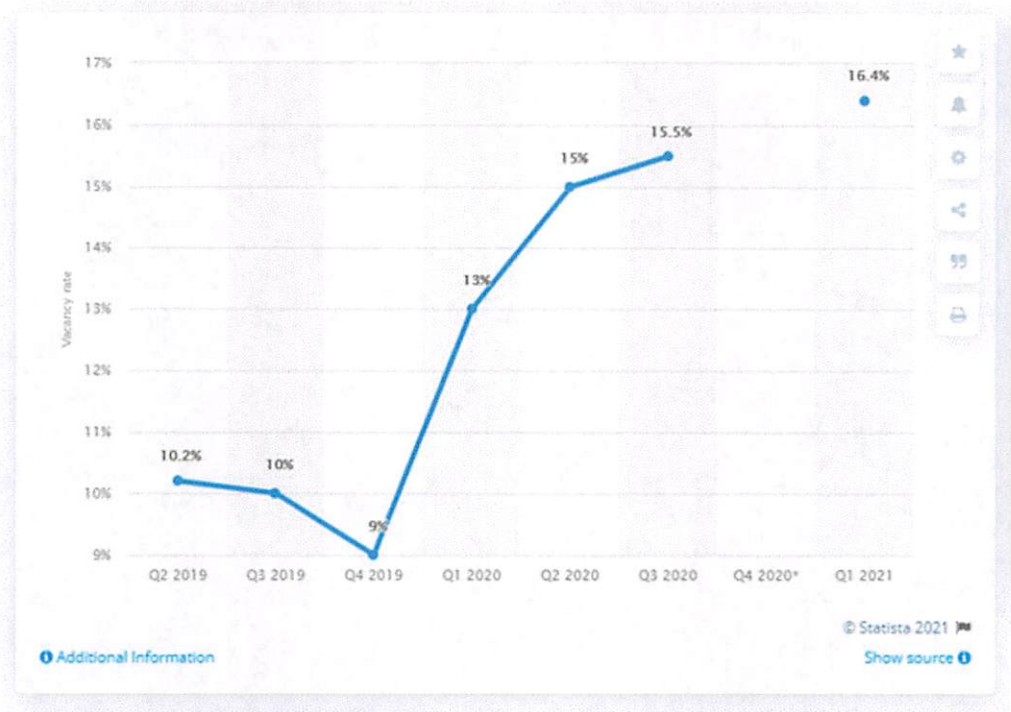


Source: Statista Research Department (5/31/21)

<https://www.statista.com/statistics/194054/us-office-vacancy-rate-forecasts-from-2010/>

Current office vacancy rates will take several years to recover before returning to pre-COVID conditions. Exacerbating this trend is the impact that COVID had on how work gets done in the office. Before the pandemic only 17% of U.S. employees worked from home full time, a share that increased to 44% during the pandemic.

- D. The long-term impact of the pandemic on the need for office space will not be known for some time, but both the current vacancy rates and number of employees who will continue to work from home in the future is trending toward a slowdown in demand for new office space as illustrated in Slide 3.

Slide 3:
Changes in Remote Work Trends due to COVID-19 in the U.S. in 2020

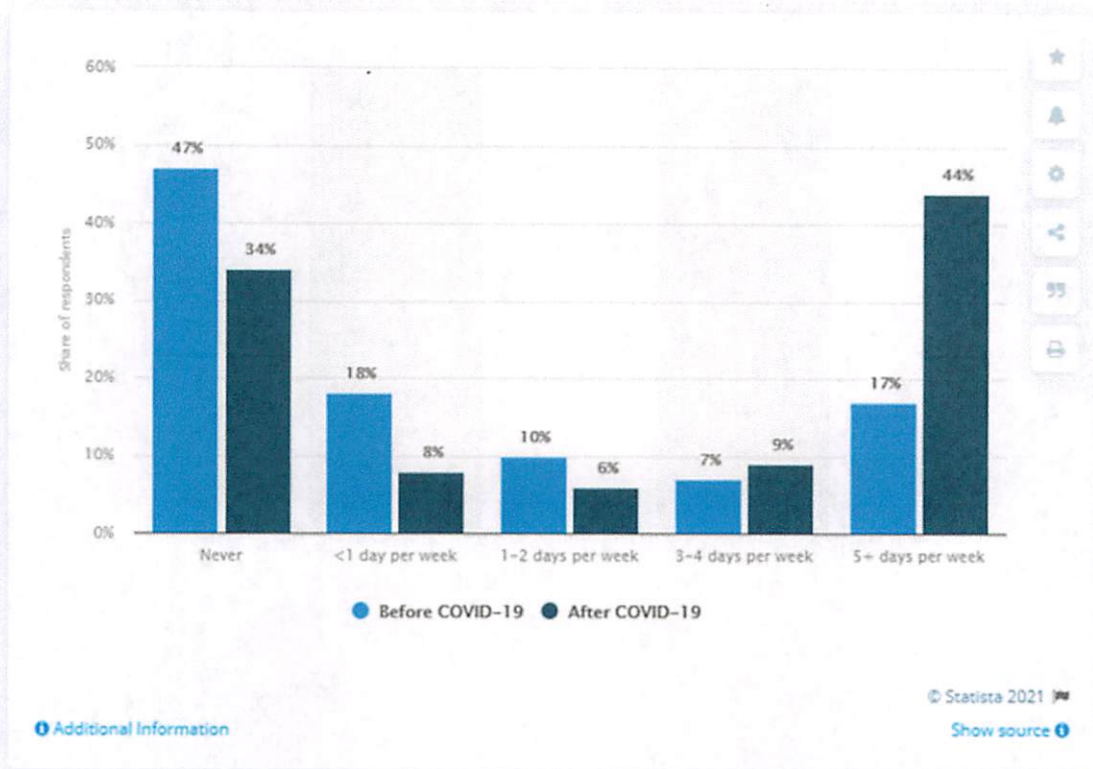

The decreased demand for new office space will be worse for properties within the B-RP zone since its relatively remote location in North Richland places it at a disadvantage to other more centrally located properties within the Tri-Cities market. The proximity of the B-RP zone to Department of Energy (DOE) operations makes the B-RP zone attractive to companies that support DOE functions, but since DOE has determined its new office spaces will be on DOE-owned lands, the likelihood that any new office uses would be built on privately owned B-RP zoned lands is slim.

A variety of other uses are allowed in the B-RP zone including residential, commercial and light industrial uses. Some residential projects have been constructed within the B-RP zone. Residential complexes within the zone are intended to provide housing opportunities for individuals who work within the B-RP zone or on the Hanford site, with the intent that commuter traffic volumes through Richland could be reduced. Residential use is intended to be accessory to and supportive of office park and business research park uses, limited to no more than 20% of the B-RP zoned land area or no more than 20% of a specific business park or master planned area per RMC 23.28.020(B)(4). Additionally, RMC 23.28.020(B)(5) limits the total amount of contiguous residential parcels to no more than 20 acres. Given SMI XV's ownership and the proximity of two residential projects

adjacent to their property, residential development is not an option under the current code.

Slide 4: Applicant SMI GROUP XV's Ownership



Some commercial use is allowed within the B-RP zone, generally limited to personal service uses, food services and gas station/mini marts. Restrictions listed in RMC 23.28.020(A)(5) limit commercial development to no more than 15% of the total current number of B-RP zoned acres. There has been little commercial development in this zone. Commercial uses located on separate parcels consist of a daycare, a restaurant and a Montessori School. Other commercial services have in the past been located within office complexes. While not located within the B-RP zone, a 5-acre commercial complex, known as University Square is located at the southeast corner of the intersection of Stevens Drive and University Drive and is immediately adjacent to B-RP zoned land. It has struggled to stay open, even before the pandemic began.

Given that these commercial buildings with good visibility and access from Stevens Drive struggle to attract enough business, other less visible properties within the B-RP zone would not be profitable as commercial uses. Further, the impact of office closures and employees working from home has reduced the number of potential customers that may otherwise choose to frequent commercial services located within the B-RP zone.

Light manufacturing is the also permitted in the B-RP zone but is not feasible due to the high cost of developing in the B-RP compared to other locations.

It is difficult to quantify comparative land values without the benefit of commercial land appraisals. However, the assessed values provided by the Benton County Assessor will give us an indication of the trends, keeping in mind that assessed valuation is generally lower than market value. Table 2 below shows that the average assessed values of several selected undeveloped properties within the B-RP zone exceeds \$130,000 per acre. Note that this table does not represent a comprehensive study of land values within the B-RP, but rather is a cross-sampling of small, medium and larger properties to demonstrate their relative values.

Table 2: Assessed Valuation of Selected Undeveloped Properties in the B-RP Zone

Owner	Acreage	Assessed value	Value/acre
Port of Benton Richardson Road	29.17	\$3,182,970	\$109,117
Port of Benton 2800 GW Way	9.86	1,322,870	134,165
Battelle Memorial Institute 524 3 rd Street	15.18	1,433,240	94,416
Croskrey Brothers 2910 George Washington Way	1.88	237,490	126,303
Croskrey Brothers 2930 George Washington Way	1.88	237,490	126,303
Sign Factice Care 411 Hills Street	1.68	350,540	208,654
Average Value/Acre			\$133,160

The Horn Rapids Business Park, located north of SR-240 and west of the B-RP lands, contains hundreds of acres owned by the City of Richland that are being offered for sale as part of its economic development efforts. The City had the area appraised in June 2021 so that it could set market value for these properties. Values of the land within the Horn Rapids Business Park vary depending upon the proximity of a specific site to major road frontage, access to rail, visibility from the highway and the presence of utilities. For properties less than 10 acres in size, valuation was set between \$65,000 and \$98,000 per acre. For sites larger than 10 acres, valuation was set between \$54,000 and \$65,000 per acre.

The absence of formal commercial land appraisals of B-RP parcels does not hinder us from concluding that even the highest per-acre property values within the Horn Rapids Business Park are significantly lower than the average per-acre assessed valuation of B-RP land. Therefore, land prices in the B-RP zone make development of light manufacturing uses unlikely.

Additionally, development standards imposed in the B-RP zone exceed those of the Medium Industrial (MI) zone within the Horn Rapids Business Park. The greatest negative impact is the requirement that a full quarter (25%) of the land area within a B-RP parcel must be devoted to landscaping (RMC 23.28.060(A)) contrasted with the landscaping requirements of the MI zone which are far less. The relatively higher land values in the B-RP zone, combined with stricter and

more costly aesthetic standards, will naturally steer light industrial development away from the B-RP zone.

The conclusion is that SMI Group XV LLC has property that it cannot feasibly develop with the uses that are allowed under the current B-RP regulations.

Land Ownership Patterns

Most of the B-RP zoned land is owned by just a few entities, as displayed in Table 3 below.

Table 3: Land Ownership within the B-RP Zone

Property Owner	Total Acres	Number of Parcels	Developed Acres	Undeveloped Acres
Department of Energy	246	7	190	56
Battelle Memorial Institute	155	12	83	72
Port of Benton	80	11	35	45
Innovation Center	89	5	11	78
Others	154	38	61	111
Totals	724	73	380	344

This is significant from a couple of perspectives. First, as outlined above, the Department of Energy (DOE) will direct any new construction of facilities in the future onto their own land. Expansion of the Pacific Northwest National Laboratory (PNNL) will occur within Battelle-owned and/or DOE lands. Given that there are approximately 128 acres of undeveloped land within the ownership of these two entities, the desired purposes of the B-RP zone will continue to be met; namely, land will be left available for future office use and for research park facility development.

Lands owned by the Port of Benton within the B-RP zone are located east of George Washington Way where they are generally further removed from residential uses. Given the Port's focus on promotion of economic development, its properties are the most likely locations for future light industrial uses as well as research park facilities.

Lands owned by the Innovation Center remain largely undeveloped but do contain two apartment complexes. Given the size of their land holdings, the Innovation Center has opportunities for more residential development and with their frontage along Stevens Drive, more opportunities for commercial development as well.

Demand for Mini Warehouse Uses

As discussed above, the opportunities for the applicants to develop their properties with uses permitted in the B-RP zone are limited at best. However, there are other land uses that are both

compatible with other B-RP land uses and are feasible under current market conditions. Mini warehouse facilities are lacking in the North Richland area, despite a significant increase in the number of housing units within the area over the past several years, especially multi-family units.

Slide 5: North Richland Apartment Locations



Within approximately one and a half miles of the applicant's site, there are a total of nine housing complexes with 952 dwelling units, as seen on Slide 5. Additionally, there are more apartment units planned to be built on the Washington State University campus and at Willow Pointe.

As housing prices increase, the trend is for higher density residential development, including multi-family complexes, townhomes, and single-family homes on smaller lots. This trend leads to an increased demand for mini warehouses, as more and more residents lack sufficient storage space within their residences or yards.


Within the B-RP zone, there is significant potential for additional residential development. B-RP zoning standards limit residential development to no more than 20% of the total acreage within the zone (760 total acres x 20% = 152). B-RP zoning standards also require an average density of 8 units/acre. If residential development were to be maximized within the B-RP zone, a total of 1,020 additional units could be constructed, significantly increasing the demand for mini warehouse uses.

Existing mini storage facilities, shown on Slide 6 below, are relatively far removed from the housing complexes in and adjacent to the B-RP zone. Two facilities are located within the Richland Airport and a third is located north of SR 240 and west of Queensgate Drive. Those three

facilities are the only operational mini storages located north of Van Giesen Street. The high demand for new mini storage is illustrated by the new Home Run Self Storage Complex located on Kingsgate Way, across SR 240 from the Horn Rapids residential community. That 156-unit facility currently has an occupancy rate of 100%.

Lands in the North Richland area that may accommodate mini storage facilities are the C-3 General Commercial and M-I Medium Industrial zones. While there is a huge inventory of vacant C-3 and M-I lands within the Horn Rapids Business Park, the great majority of this property is owned by the City of Richland. The City's goal is to sell the land for future uses that will create jobs. Mini warehouses do not fit this description and so the land will not be sold for that purpose. The result is that the potential for locating additional mini warehouses in North Richland is extremely limited.

Slide 6: Existing Mini Storage Facilities Serving the Business Research Park Area

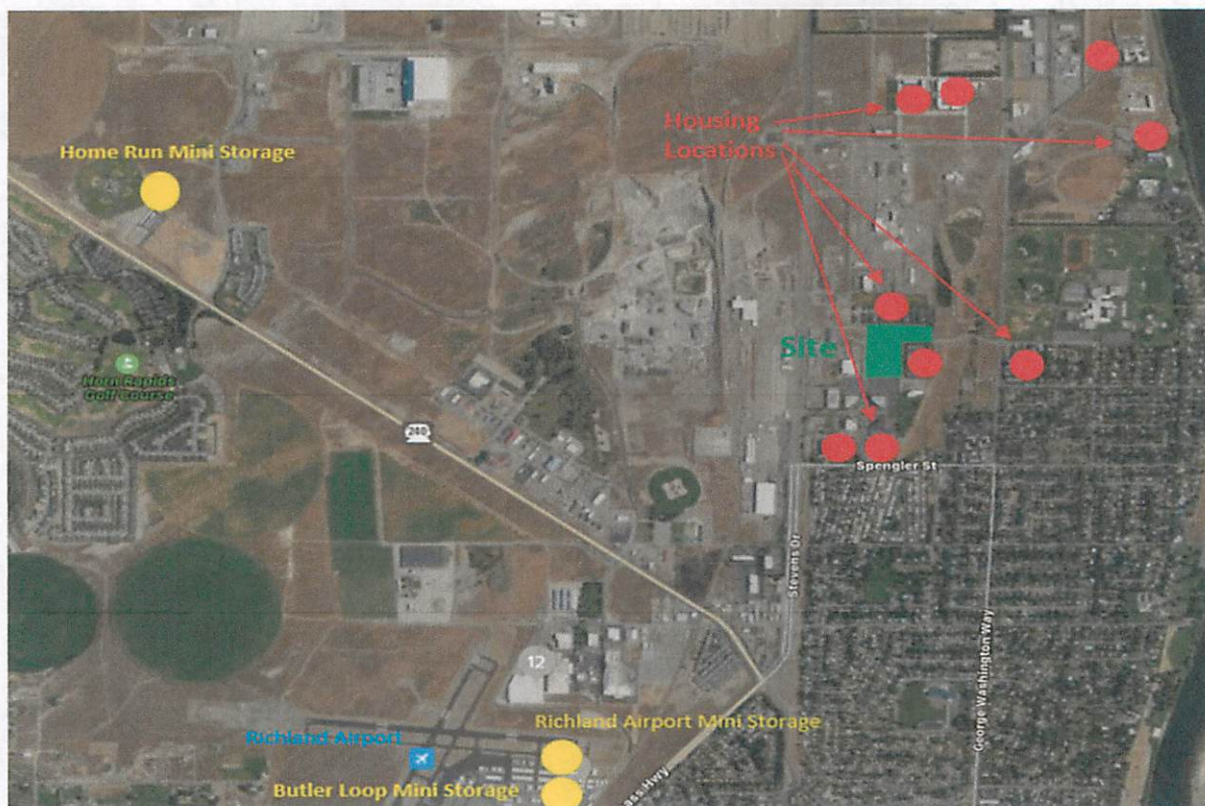

Valuation of Mini Warehouse Uses

One possible concern regarding mini warehouse use is the amount of tax revenue that such facilities generate. Other more intensive uses of property, such as large office complexes within the B-RP zone can carry higher assessed valuations and consequently generate more tax revenue for the City. These facilities may result in improvement values over a \$1,000,000/acre. The table below shows the improvement value of existing mini storage facilities located in Richland. This list shows a variety of properties of differing ages and levels of quality. It includes some facilities that

are a mix of structures and open storage areas, while other facilities have only storage within enclosed structures. The table demonstrates that mini warehouses would generate values well in excess of \$560,000/acre.

Table 4: Assessed Valuation of Richland Mini Storages

Name	Zone	Acres	Land Value	Improvement Value	Total Value	Improvement Value/Acre
On Guard Mini Storage 55 Aaron Drive	C3	2.29	\$215,470	\$1,624,500	\$1,839,970	\$709,389
ABC Mini Storage 701 Aaron Drive	C3	2.79	252,790	2,010,000	2,262,790	720,430
Butler Loop Mini Storage 1985 Butler Loop	IM	2.7	219,050	793,890	1,012,940	294,033
Home Run Self Storage 2701 Kingsgate Way	IM	4.19	211,720	2,055,710	2,267,430	490,623
Queensgate Storage 2372 Jericho Road	C3	2.28	615,760	1,497,160	2,112,920	656,649
Tri Cities Self Storage 3869 Kennedy Road	BC	3.69	1,683,870	2,825,240	4,509,110	765,648
David & Sons Mini Storage 410 Wellhouse Loop	C3	2.06	263,520	991,670	1,255,190	481,393
Wellsian Way Mini Storage 104 Wellsian Way	C3	1.79	304,090	760,690	1,064,780	424,966
Average Improvement Value/Acre						\$567,891

The SMI Group's proposal to develop its 11.5-acre site with mini warehouses would result in an assessed improvement value of over \$6.5 million, based on valuation of existing facilities.

Tax revenue generated through a particular development is only part of the picture. The demand for city services generated by that development is also a critical piece. Mini warehouse uses create relatively low demands for services. For example, city water would be needed onsite for fire protection, but actual water use would be limited to landscape and a minor amount for the rental office. Sewer service would also be limited to rental office use. Electrical energy would be generally limited to lighting of the facility. Other B-RP uses such as office complexes and residences generate much higher demands for utility services and for emergency service protection. Other city services such as parks and recreational programs and the city library would not be impacted at all. The school district likewise would benefit from the increased tax base but would bear no new service costs generated from mini warehouses. Traffic generated by a mini warehouse would be much less than office complexes or residences and would not generally occur during peak commuter periods.

The conclusion is that mini warehouses would be beneficial to the City in terms of generating property taxes while resulting in relatively low service costs.

Mini Warehouse Compatibility with other B-RP Land Uses

Mini warehouses would be compatible with existing B-RP land uses in that mini warehouses:

- generate little noise and activity compared to other B-RP commercial, residential, office or light industrial uses;
- generate low traffic volumes and would not add traffic to the city street system during peak hours;
- located near residential uses would result in shorter trips and less vehicle miles of travel;
- are single story structures and so would have less visual impact than multi-story office or residential buildings that can extend up to 55 feet in height;
- would require fewer public services than many other B-RP uses. With no residents or employees on-site, emergency services such as police and ambulance calls would be less than for residential or office uses;
- would not place any demands on city park systems or public schools and only minimal demands on the city street system;
- are similar in nature in effect and appearance to other permitted B-RP uses such as outdoor storage and storage within an enclosed building; and
- would be available to serve adjacent and nearby residential communities, providing a conveniently located service.

Proposed Design Standards

As with all other B-RP uses, mini warehouses would need to meet standard setback requirements of a 25-foot front yard and 20-foot side and rear yards. Additionally, a minimum of 25% of a site would need to be landscaped. To ensure compatibility with adjacent land uses, the proposed code amendment would add the following criteria to ensure that appropriate aesthetics are maintained:

- Exterior building colors should be subdued. Primary colors or other bright colors should generally be used only as accents to enliven the architecture.
- Exterior building surfaces shall be comprised of a mixture of building materials. Exterior wall surfaces shall not be primarily comprised of metal siding.
- Mini warehouses shall be enclosed on all sides with a wall, landscape hedge or combination thereof at least 6 feet in height.

Slides 7 through 9 below are architectural renderings and a conceptual site plan that demonstrate that mini warehouses can be attractive and are an appropriate use within the B-RP zone.

Finally, to ensure that mini warehouses do not become a land use that extends throughout the 760-acre B-RP zone, potentially displacing future office and research park uses, a limit on the amount of land developed with mini warehouses can be put into effect. Like residential uses,

which are capped at 20% of the B-RP land area and commercial uses which are limited to 15% of B-RP land area, mini warehouses could be limited to 5% or 38 acres of the B-RP land area.


Conclusion

Opportunities for development of SMI Group XV LLC properties in the B-RP zone are extremely limited. Mini warehouses in the B-RP zone would help to fill a backlog in demand in the North Richland area. The existing standards within the B-RP zone, together with the design standards proposed in the code amendment, will ensure that mini warehouses remain compatible with other B-RP land uses. Adding mini warehouses to the list of permitted uses would be beneficial to the property owners and residents of North Richland within the B-RP zone and would provide an economic benefit to the City that comes with increasing the tax base while producing only minimal impacts to City services.

Slides 7 & 8: Architectural Renderings



Slide 9: Conceptual Site Plan

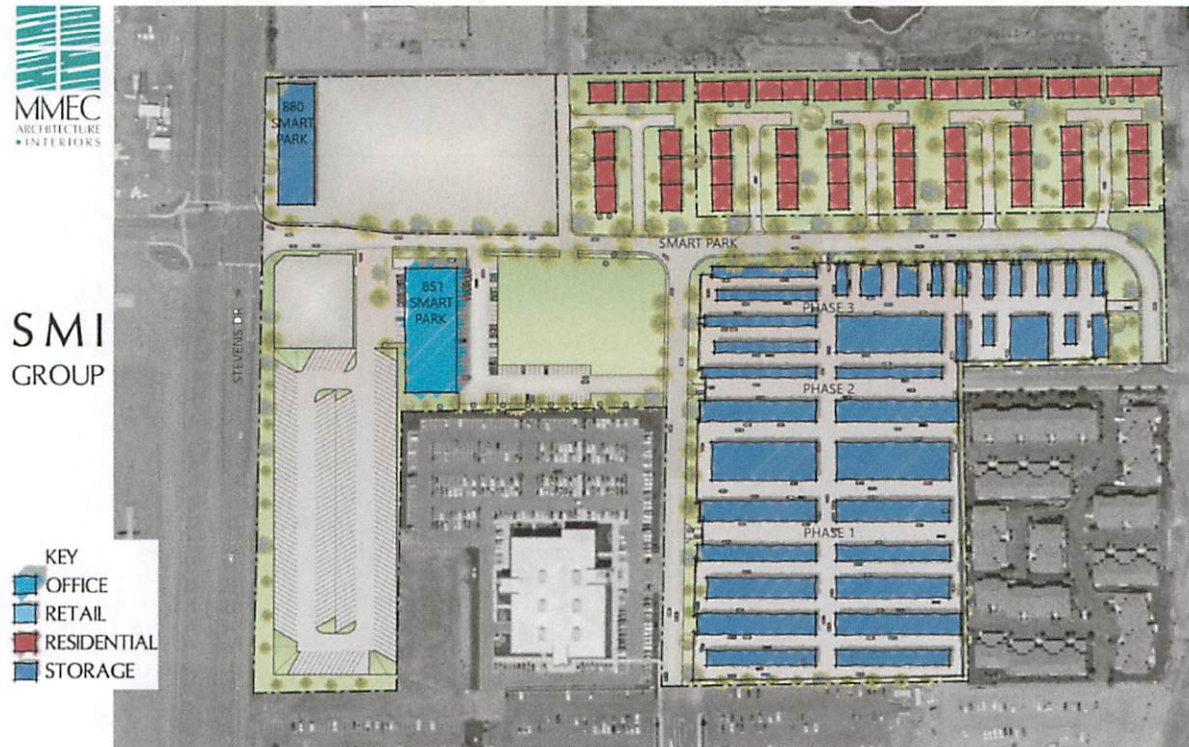



Code Amendment Application

Note: A Pre-Application meeting is required prior to submittal of an application.

APPLICANT

☐ Contact Person

Company: SMI Group XV, LLC

UBI#:

Contact: Steve. Henry

Address: 1030 Battelle Blvd., Suite 102, Richland, WA 99354

Phone: (509) 375-9002

Email: SJHenry@smigroup.org

DESCRIPTION OF PROPOSED AMENDMENT

The proposed code amendment would permit mini warehouses as a permitted use within the Business Research Park (B-RP) zone, subject to specific criteria.

APPLICATION MUST INCLUDE:

1. Completed application and filing fee
2. SEPA Checklist (if necessary)
3. Other information as determined by the Administrator

ANSWER THE FOLLOWING AS COMPLETELY AS POSSIBLE:

Section(s) of code proposed to be amended (include code citation):

Section 23.28.030 of the Richland Municipal Code to be amended to add "Mini-Warehouse" to the list of Business and Personal Service Uses that are permitted within the Business Research Park (B-RP) Zone, subject to the provisions of RMC 23.42.185 and to a proposed footnote #16 (see attached).

Summary of requested code amendment(s):

See attached draft code language.

Reason(s) for code amendment(s):

For a detailed explanation please see attached document titled: "Rationale for B-RP Code Amendment"

Is the proposed amendment consistent with the applicable provisions of the Comprehensive Plan? Is a Comprehensive Plan amendment necessary to implement the proposed amendment?

Yes, please refer to the attached document titled, "Proposed B-RP Code Amendment - Consistency with Comprehensive Plan".

Does the proposed amendment bear a substantial relation to the public health, safety, welfare and protection of the environment? Please explain:

Yes, the proposed code amendment would provide for a use that is needed within the B-RP zone and that would be compatible with other B-RP uses. It would generate tax revenue for the City and would provide needed development potential for land B-RP land owners. The amendment would not result in development that is more adverse to the environment than many other uses already permitted in the B-RP zone. A more complete discussion can be found in the attached "Rationale for B-RP Code Amendment" .

I hereby certify under penalty of perjury under the laws of the State of Washington that the following is true and correct:

1. I have read and examined this permit application. The information provided in this application contains no misstatement of fact.
2. I am an owner(s), authorized agent(s) of an owner(s), or I am currently a licensed contractor or specialty contractor under Chapter 18.27 RCW, or I am exempt from the requirements of Chapter 18.27 RCW.

Note: This application will not be processed unless the above certification is endorsed by an authorized agent of the owner(s) of the property in question and/or the owner(s) themselves. If the City of Richland has reason to believe that erroneous information has been supplied by an authorized agent of the owner(s) of the property in question and/or by the owner(s) themselves, processing of the application may be suspended.

Applicant Printed Name: Steven Henry

Applicant Signature:  Date 08/25/2021



PLANNING COMMISSION AGENDA ITEM COVERSHEET

Meeting Date: 11/10/2021

Agenda Category: Agenda Items

Prepared By: Mike Stevens, Planning Manager

Subject:

Proposed Changes to the Badger Mountain South Land Use & Development Regulations (LUDR)

Request:

Core Focus Area 3 - Increase Economic Vitality


Recommended Motion:

Summary:

Discussion on proposed changes to the BMS Land Use Development Regulations (LUDR)

Attachments:

1. Reduced_20210325_LUDR_proposed_amends_2200365 (2)



LAND USE and DEVELOPMENT REGULATIONS

City Of Richland, Washington

Exhibit C to Master Agreement Dated December 7, 2010

Amended Dates: June 19, 2012; April 15, 2014; and March 3, 2015

badger
mountain
SOUTH

TBD, 2021

PROPOSED
AMENDMENTS
SHOWN WITH
REDLINES

THIS PAGE INTENTIONALLY LEFT BLANK



badger mountain SOUTH

CONSULTANT TEAM



AHBL, Inc.
2215 N. 30th Street, Suite 300
Tacoma, WA 98403
Todd Sawin, PE
Matt Weber, PE
Lisa Klein, AICP
Craig Andersen, PLA

5804 Road 90, Suite H
Pasco, WA 99301

John Becker, PLS
Erick Fitzpatrick, PE
Nicole Stickney, AICP
Kaleb Mapstead
Tyler Duncan
Helen Stanton

CITY OF RICHLAND

~~505 Swift Boulevard~~ 625 Swift Boulevard
Richland, WA 99352

Richland City Council

~~David W. Rose – Mayor
Phillip Lemley - Mayor Pro-Tem
Brad Anderson - Council Member
Terry Christensen – Council Member
Gregory L. Jones – Council Member
Sandra Kent – Council Member
Robert Thompson – Council Member~~

Ryan Lukson - Mayor
Sandra Kent - Mayor Pro Tem
Bob Thompson - Council Member
Marianne Boring - Council Member
Phillip Lemley - Council Member
Terry Christensen - Council Member
Michael Alvarez - Council Member

Richland Planning Commission

~~Kent Madsen – Chair
Marianne Boring – Vice Chair
Clifford Clark - Commissioner
James Wise - Commissioner
Kyle Palmer – Commissioner
Amanda Wallner – Commissioner
Debbie Berkowitz - Commissioner~~

Kyle Palmer, Chair
Francesca Maier, Vice Chair
Michael Mealer, Member
Phillip Townsend, Member
Eric Smith, Member
Douglas Eadie, Member

Richland City Staff

~~Cindy Johnson - City Manager
Jon Amudson - Assistant City Manager
Bill King - Deputy City Manager for Community and Development Services
Brian Moore – Planning and Redevelopment Manager
Rick Simon – Development Services Manager
Pete Rogalsky – Public Works Director
Bob Hammond – Energy Services Director
Thomas Huntington - Fire Chief
Chris Skinner - Police Chief
Joseph Schiessel - Parks and Recreation Director
Jay Marlow - Capital Projects Manager~~

Jon Amudson - Interim City Manager
Kerwin Jensen - Development Services Director
Mike Stevens - Planning Manager
Clint Whitney - Energy Services Director
Pete Rogalsky, PE - Public Works Director
Joseph Schiessel - Parks and Public Facilities Director
John Bruce - Chief of Police
Tom Huntington - Fire Chief

NOTE: New logo substituted in October 2011
Graphics and layout originally prepared
by Johnson Braund, Inc.

TABLE OF CONTENTS

Section 1: Introduction - How to Use the LUDR 1-1
1.A Intent.....1-2
1.B Purpose1-2
1.C Applicability of the LUDR1-2
1.D Administration1-2
1.E Illustrative Plan of Badger Mountain South.....1-2
1.F Regulating Plan and Districts1-3
1.G Land Uses1-3
1.H BMS Master Agreement Consistency Determination.....1-3
1.I How To Use The Land Use Development Regulations1-4
1.J Submittal Review Process.....1-4

Section 2: Urban Form Districts, Land Uses, and Types 2-1
2.A Introduction2-2
2.B Regulating Plan for Land Use and Urban Form2-2
2.C Land Use Table2-3
2.D Building Type Table.....2-4
2.E Building Type Examples.....2-4

Section 3: Urban Form Standards For Districts 3-1
3.A Introduction - Urban Form Standards For Districts3-2
3.B BMS Village Mixed-Use District (BMS-VMU)3-3
3.C BMS Neighborhood Collector District (BMS-NC)3-4 ~~to 3-5~~
3.D BMS Neighborhood General District (BMS-NG)3-6
3.E BMS Neighborhood Edge District (BMS-NE).....3-7
3.F BMS Civic District (BMS-CIVIC)3-8

Section 4: Special District Standards 4-1
4.A Introduction4-2
4.B Specialty Retail (BMS-SD-SR)4-2
4.C Commercial Mixed-Use (BMS-SD-CMU)4-3
4.D Destination Retail (BMS-SD-DR).....4-3

Section 5: Civic Space Standards 5-1
5.A Civic Space Introduction5-2
5.B Greenway Parks.....5-2
5.C Local Parks.....5-3
5.D Plaza / Town Square5-3
5.E Greenbelts5-4
5.F Public Parks and School Open Space5-4
5.G Trails Introduction5-5
5.H Illustrative Plan for Trail Layout and Trail Types5-5
5.I Trails5-6

Section 6: Street Standards 6-1
6.A Introduction6-2
6.B Regulating Plan for Streets6-2
6.C 4-Lane Arterial Collector Street6-3
6.D 2-Lane Arterial Collector Street6-3
6.E Collector Street.....6-4
6.F 16 ft. Local Street6-4
6.F.1 Alternate - 12 ft. Local Street6-5
6.G Rear Alley6-5
6.H Roundabout.....6-6

Section 7: Block Standards and Project Targets 7-1
7.A Introduction7-2
7.B Block Standards.....7-2
7.C Project Density and Open Space Targets.....7-3
7.D Illustrative Neighborhood Development Plan7-3

update
Section 5
listing

Section 8: Building Type Standards 8-1
8.A Introduction8-2
8.B Building Types Summary8-2
8.C Common Design Standards8-3
8.D Civic / Community / Institutional Facilities8-4
8.E Neighborhood Goods and Services Building.....8-5
8.F Commercial / Mixed-Use / Liner8-6
8.G Live / Work8-7
8.H Stacked Unit Building.....8-8
8.I Row House.....8-9
8.J Courtyard Housing8-10
8.K Mansion Apartment8-11
8.L Paired House (Duplex)8-12
8.M Cottage Court.....8-13
8.N Single-Family House - Alley Access8-14
8.O Single-Family House - Street Access8-15
8.P Accessory Unit8-16

Section 9: Frontage Type Standards 9-1
9.A Introduction9-2
9.B Storefront9-2
9.C Arcade.....9-2
9.D Gallery9-2
9.E Forecourt9-3
9.F Greenbelt.....9-3
9.G Porch.....9-3
9.H Stoop9-3

Section 10: Reserved..... 10-1

Section 11: Landscape Standards 11-1
11.A Introduction11-2
11.B Guiding Principles.....11-2
11.C Common Standards Applicable to all Districts.....11-3
11.D Civic and Commercial District Standards.....11-4
11.E Residential Standards11-4
11.F Drought Tolerant and/or Native/Naturalized Plant List.....11-5 ~~to 11-11~~
11.G Refined Plant List11-12 ~~to 11-15~~

Section 12: Sustainable Standards 12-1
12.A Introduction12-2
12.B Sustainability Principles12-2
12.C Common Standards.....12-2
12.D Non-Residential Standards12-3
12.E Residential Standards12-3

Section 13: Site Improvement Standards 13-1
13.A Fencing.....13-2
13.B Signage13-3 ~~to 13-5~~
13.C Site Furnishings and Hardscape.....13-6
13.D Common Parking Standards.....13-7

Section 14: Glossary..... 14-1 ~~to 14-4~~



**INTRODUCTION
HOW TO USE THE
LUDR**

1

Section 1 introduces the intent, purpose, applicability of the Land Use & Development Regulations (LUDR). The organization, use and submittal procedures are outlined.

1.A	Intent	1-2
1.B	Purpose.....	1-2
1.C	Applicability of the LUDR.....	1-2
1.D	Administration.....	1-2
1.E	Illustrative Plan of Badger Mountain South.....	1-2
1.F	Regulating Plan and Districts.....	1-3
1.G	Land Uses.....	1-3
1.H	BMS Master Agreement Consistency Determination.....	1-3
1.I	How to Use the LUDR.....	1-4
1.J	Submittal Review Process.....	1-4

1.A INTENT

1. Badger Mountain South (BMS), a master-planned community of 1,480 acres is intended to develop with 5,000 homes, businesses and other commercial activities. The Badger Mountain South Land Use Development Regulations (LUDR) are intended to (1) implement the land use elements of the Badger Mountain South Master Agreement approved by the by the City of Richland City Council on December 1, 2010, and (2) realize the goals and objectives which apply specifically to BMS, of the Badger Mountain Subarea Plan, adopted by the City of Richland City Council on September 7, 2010.
2. All parcels within the defined boundaries of Badger Mountain South (BMS) are required to follow these regulations which control site design, quality, and compatibility between buildings. The standards of the LUDR further serve to establish and maintain the design character of BMS by describing urban form, building types and site design which reflect important aspects of the desired quality for the development. Persons proposing development must consult the LUDR standards in preparation of plans for review by the City.
3. The underlying principle to the LUDR is that uses, buildings and streets are interrelated so there is a strong emphasis in the LUDR on the public realm and on the physical form of buildings. This greater emphasis on the physical form of the built environment is intended to produce streets and other public spaces that are varied, safe and attractive, and to encourage the construction of buildings that enhance the character of the neighborhood and business areas. The LUDR is graphic-intense and includes standards for site design and sustainability as well as graphic direction for height, siting, and building elements.
4. A map of the area of Badger Mountain South is shown in the illustration 1.E.
5. This document contains a number of should and shall statements. The intent is that should statements are desired items that will be reviewed during the design and incorporated as possible. Shall statements are requirement and revisions to these requirements require a deviation from the requirement be granted by the City.

1.B PURPOSE

1. The purpose of the LUDR is to:
 - a. Establish neighborhoods with a range of housing types to accommodate a population of diverse ages and incomes;
 - b. Promote health benefits of a walkable, pedestrian environment;
 - c. Establish mixed-use neighborhoods where daily activities can occur within walking distance of most homes;
 - d. Reduce traffic and congestion by creating a traditional neighborhood development street grid;
 - e. Improve the character and quality of the built environment;
 - f. Promote building and landscape design that conserve energy, water and other resources;
 - g. Promote lot and block orientation that accommodates passive solar capture; and
 - h. Conserve areas for parks, trails and open spaces by establishing a connected open space network.

1.C APPLICABILITY OF THE LUDR

1. All proposed development shall comply with all applicable LUDR and other Master Agreement provisions. No development permit or development approval shall be issued or approved by the city unless it complies with the applicable requirements of the LUDR and applicable provisions of the Master Agreement.
2. Relationship to the Richland Municipal Code
 - a. The LUDR, when accompanied with the other Master Agreement conditions, is designed to establish a set of City regulations that are specific to the Badger Mountain South Master Plan Community. As such, these more specific regulations regarding zoning districts, allowable land uses, permit requirements for allowable land uses, and site design and development standards, will be used instead of the corresponding regulations for other parts of the City.

The City permit processing procedures set forth in the City Code will still be used (see LUDR Section 1.J), with the addition of the Master Agreement Consistency Determination process of LUDR Section 1.H.
 - b. All references to the RMC refer to the RMC as adopted and in effect on the day the LUDR is adopted by the city.
 - c. For subdivisions and short plats, the LUDR and Master Agreement substantive requirements, including the environmental mitigation conditions incorporated into the Master Agreement, shall be used for the review criteria, but the process requirements of RMC title 24 shall be followed along with the provisions of LUDR section 1.J. Compliance with the LUDR and Master Agreement substantive standards for subdivision and short plats shall be deemed to meet the approval criteria set forth in RMC 24.13.060 for short plats, and RMC 24.12.050 and 053, as well as RCW 58.17.100 and RCW 58.17.110.
 - d. For multifamily development containing an aggregate of 7 or more dwelling units regardless of the number of structures, commercial buildings and commercial building complexes, all civic buildings, and all development in a Special District, a site plan review is required. The LUDR and Master Agreement substantive requirements, including the environmental mitigation conditions incorporated into the Master Agreement, shall be used for the review criteria, but the process requirements of RMC chapter 23.48 shall be followed along with the provisions of LUDR section 1.J.
 - e. For binding site plans the LUDR and Master Agreement substantive requirements, including the environmental mitigation conditions incorporated into the Master Agreement, shall be used for the review criteria, but the process requirements of RMC title 24.14 shall be followed along with the provisions of LUDR section 1.J.
 - f. In some instances minor inconsistencies from the substantive requirements of the LUDR conditions may be acceptable if they meet certain criteria and represent an equivalent or superior design solution to what would otherwise be achieved by rigidly applying the specific requirements. The processing procedures for minor deviations from the LUDR are as set forth in Section 1.H.
3. Conditions in Addition to the LUDR.

There may be additional conditions imposed by the Badger Mountain South Home Owners’ Associations or Business Owners’ Associations through Conditions, Covenants, and Restrictions that relate to land use and development activities such as, but not limited to, architectural style, colors, or other building features. These additional conditions are privately enforced and not subject to the LUDR.
4. Conflicts with Other Codes.

Since the City has adopted regulations that are specific to the Badger Mountain South Master Plan Community, if there is a conflict between those specific City regulations applicable


- to BMS and other City regulations, the BMS regulations shall control. Provided, however, this general principle shall not apply to the following:
- a. Building Code, RMC Title 21
 - b. Life Safety Code, RMC Title 20
 - c. Electrical Code, RMC Title 14
 - d. Energy Code, Chapter 19.27A of the Revised Code of Washington.
 - e. Sensitive Areas Ordinance, RMC, Chapter 22.10
5. State, County, local agency and school district sites and facilities.

The requirements of the LUDR shall apply to all sites and facilities in Badger Mountain South of the State of Washington, Benton County, and any school district or other local agency to the maximum extent allowed by law.
 6. Civic Buildings and Facilities.

It is intended that the design quality and sustainability components of Civic buildings and facilities exceed the general standard for residential and commercial buildings within Badger Mountain South as set forth in the Building Type standards section 8.D and Sustainable Standards section 12.D.
 7. Terms

Capitalized terms used throughout the LUDR are defined in Section 14, Glossary. Those terms not defined in Section 14 shall be accorded their commonly accepted meanings. In the event of conflicts between these definitions and those of the RMC, those of the LUDR shall take precedence.

1.E ILLUSTRATIVE PLAN OF BADGER MOUNTAIN SOUTH

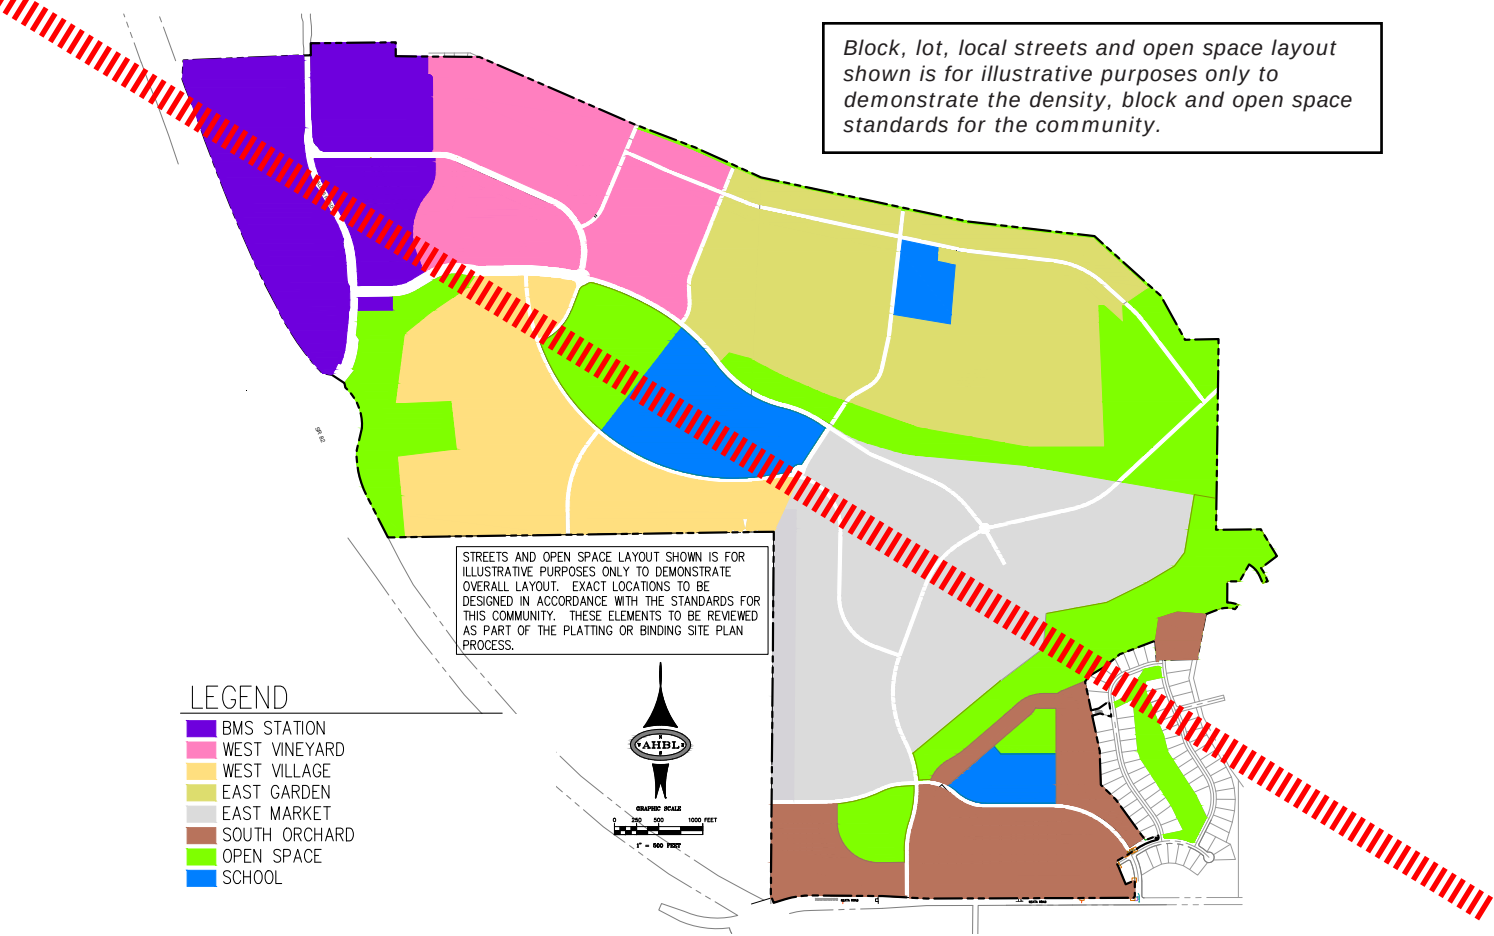

8. Diagrams and illustrations
Diagrams, photographs and illustrations are an integral part of the LUDR and are used to help explain the guidelines and standards. When in conflict, written text shall take precedence over graphic metrics.
9. Appeals
Any decision or determination made by a city official in the administration or application of the provisions of the LUDR may be appealed in the same manner as provided in RMC Section 23.70.1. Responsibility for Administration.
10. Document Intent
The LUDR is intended to be a living document that will evolve to meet market and site conditions as well as ensure the project is constructed in the desired sustainable, walkable, and green manner. The intent is that the most current LUDR be used to evaluate permit applications and projects are not vested to a current version of this document.

1.D ADMINISTRATION

The LUDR shall be administered by the Richland City Manager or his/her designee. The Richland City Council “Council”, Planning Commission “Commission” and Development Services Manager “Director” also have designated roles related to the implementation of the LUDR and are collectively referred to in the LUDR as the “review authority”.

PROPOSED AMENDMENTS ARE SHOWN:
1.A INTENT

1. Badger Mountain South (BMS), a master-planned community of 1,480 acres is intended to develop with 5,000 homes, businesses and other commercial activities. The Badger Mountain South Land Use Development Regulations (LUDR) are intended to (1) implement the land use elements of the Badger Mountain South Master Agreement approved by the by the City of Richland City Council on December 7, 2010, and (2) realize the goals and objectives which apply specifically to BMS, of the Badger Mountain Subarea Plan, adopted by the City of Richland City Council on September 7, 2010.
2. All parcels within the defined boundaries of Badger Mountain South (BMS) are required to follow these regulations which control site design, quality, and compatibility between buildings. The standards of the LUDR further serve to establish and maintain the design character of BMS by describing urban form, building types and site design which reflect important aspects of the desired quality for the development. Persons proposing development must consult the LUDR standards in preparation of plans for review by the City.
3. The underlying principle to the LUDR is that uses, buildings and streets are interrelated so there is a strong emphasis in the LUDR on the public realm and on the physical form of buildings. This greater emphasis on the physical form of the built environment is intended to produce streets and other public spaces that are varied, safe and attractive, and to encourage the construction of buildings that enhance the character of the neighborhood and business areas. The LUDR is graphic-intense and includes standards for site design and sustainability as well as graphic direction for height, siting, and building elements.
4. A map of the area of Badger Mountain South is shown in the illustration 1.E.
5. This document contains a number of should and shall statements. The intent is that should statements are desired items that will be reviewed during the design and incorporated as possible. Shall statements are requirement and revisions to these requirements require a deviation from the requirement be granted by the City.

1.B PURPOSE

1. The purpose of the LUDR is to:
 - a. Establish neighborhoods with a range of housing types to accommodate a population of diverse ages and incomes;
 - b. Promote health benefits of a walkable, pedestrian environment;
 - c. Establish mixed-use neighborhoods where daily activities can occur within walking distance of most homes;
 - d. Reduce traffic and congestion by ~~creating a traditional neighborhood development street grid;~~
 - e. Improve the character and quality of the built environment;
 - f. Promote building and landscape design that conserve energy, water and other resources;
 - g. Promote lot and block orientation that accommodates passive solar capture; and
 - h. Conserve areas for parks, trails and open spaces by ~~establishing a connected open space network.~~
linking local street networks through subdivisions to provide efficient local circulation and provide additional collector arterial access for major residential areas.

1.C APPLICABILITY OF THE LUDR

1. All proposed development shall comply with all applicable LUDR and other Master Agreement provisions. No development permit or development approval shall be issued or approved by the city unless it complies with the applicable requirements of the LUDR and applicable provisions of the Master Agreement.
2. Relationship to the Richland Municipal Code
 - a. The LUDR, when accompanied with the other Master Agreement conditions, is designed to establish a set of City regulations that are specific to ~~the~~ Badger Mountain South ~~Master Plan Community.~~ As such, these more specific regulations regarding zoning districts, allowable land uses, permit requirements for allowable land uses, and site design and development standards, will be used instead of the corresponding regulations for other parts of the City.
The City permit processing procedures set forth in the City Code will still be used (see LUDR Section 1.J), with the addition of the Master Agreement Consistency Determination process of LUDR Section 1.H.
 - b. All references to the RMC refer to the RMC as adopted and in effect on the date the LUDR is adopted by the city.
 - c. For subdivisions and short plats, the LUDR and Master Agreement substantive requirements, including the environmental mitigation conditions incorporated into the Master Agreement, shall be used for the review criteria, but the process requirements of RMC title 24 shall be followed along with the provisions of LUDR section 1.J. Compliance with the LUDR and Master Agreement substantive standards for subdivision and short plats shall be deemed to meet the approval criteria set forth in RMC 24.13.060 for short plats, and RMC 24.12.050 and 053, as well as RCW 58.17.100 and RCW 58.17.110.
 - d. For multifamily development containing an aggregate of 7 or more dwelling units regardless of the number of structures, commercial buildings and commercial building complexes, all civic buildings, and all development in a Special District, a site plan review is required. The LUDR and Master Agreement substantive requirements, including the environmental mitigation conditions incorporated into the Master Agreement, shall be used for the review criteria, but the process requirements of RMC chapter 23.48 shall be followed along with the provisions of LUDR section 1.J.
 - e. For binding site plans the LUDR and Master Agreement substantive requirements, including the environmental mitigation conditions incorporated into the Master Agreement, shall be used for the review criteria, but the process requirements of RMC title 24.14 shall be followed along with the provisions of LUDR section 1.J.
 - f. In some instances minor inconsistencies from the substantive requirements of the LUDR conditions may be acceptable if they meet certain criteria and represent an equivalent or superior design solution to what would otherwise be achieved by rigidly applying the specific requirements. The processing procedures for minor deviations from the LUDR are as set forth in Section 1.H.
3. Conditions in Addition to the LUDR.
There may be additional conditions imposed by the ~~Badger Mountain South~~ Home Owners’ Associations or Business Owners’ Associations through Conditions, Covenants, and Restrictions that relate to land use and development activities such as, but not limited to, architectural style, colors, or other building features. These additional conditions are privately enforced and not subject to the LUDR.
4. Conflicts with Other Codes.
Since the City has adopted regulations that are specific to ~~the~~ Badger Mountain South ~~Master Plan Community~~, if there is a conflict between those specific City regulations applicable

- to BMS and other City regulations, the BMS regulations shall control. Provided, however, this general principle shall not apply to the following:
- a. Building Code, RMC Title 21
 - b. Life Safety Code, RMC Title 20
 - c. Electrical Code, RMC Title 14
 - d. Energy Code, Chapter 19.27A of the Revised Code of Washington.
 - e. Sensitive Areas Ordinance, RMC, Chapter 22.10
5. State, County, local agency and school district sites and facilities.
The requirements of the LUDR shall apply to all sites and facilities in Badger Mountain South of the State of Washington, Benton County, and any school district or other local agency to the maximum extent allowed by law.
6. Civic Buildings and Facilities.
It is intended that the design quality and sustainability components of Civic buildings and facilities exceed the general standard for residential and commercial buildings within Badger Mountain South as set forth in the Building Type standards section 8.D and Sustainable Standards section 12.D.
7. Terms
Capitalized terms used throughout the LUDR are defined in Section 14, Glossary. Those terms not defined in Section 14 shall be accorded their commonly accepted meanings. In the event of conflicts between these definitions and those of the RMC, those of the LUDR shall take precedence.

1.E ILLUSTRATIVE PLAN OF BADGER MOUNTAIN SOUTH



1.F REGULATING PLAN AND DISTRICTS

1. Districts and Their Purposes

The area subject to the LUDR shall be divided into the following districts which shall be applied to property within Badger Mountain South as shown on the Regulating Plan for Land Use and Urban Form, 2.B. The Urban Form Standards for Districts, other than Special Districts are included in Section 3. Special District Standards are included in Section 4. All district descriptions below are preceded by the appellation, BMS, which stands for Badger Mountain South.

a. BMS-VMU District. The Village Mixed Use District is where mixed-use and multi-family residential buildings are intended to create a pedestrian-oriented urban fabric. The district provides for a variety of non-residential uses and a mix of housing types at higher intensities and densities. Besides accommodating community-serving buildings, it may also serve the daily convenience shopping and service needs of nearby residents. Building types include Civic/ Institutional/Community Buildings, Neighborhood Goods and Services Buildings, Commercial/Mixed-use/Liner, Live/Work, Stacked Units and Row Houses. The landscape style is urban, emphasizing street trees and wide sidewalks.

b. BMS-NC District. The Neighborhood Collector District is a residential district located in close proximity to parks, trails and greenbelts primarily along Collector streets and neighborhood entry points. It is intended to permit a variety of housing types at medium intensities and densities, with some opportunities for neighborhood-serving retail, businesses, services and cafes. Allowable building types include Civic/Institutional/Community Buildings, Neighborhood Goods and Services Buildings, Commercial/ Mixed-use/Liner, Live/Work, Stacked Units, Row Houses, Courtyard Housing, Mansion Apartments and Duplexes. The landscape style is appropriate to a neighborhood with street trees and sidewalks, or when adjacent to a greenbelt, a wider landscaped treatment with a portion of the community’s trail system.

c. BMS- NG District. The Neighborhood General District is the primary residential district found in Badger Mountain South. It is intended to permit a variety of housing types at urban intensities and densities. Allowable building types include Civic/Institutional/Community Buildings, Courtyard Housing, Mansion Apartments, all in limited applications, as well as Duplexes, Cottage Courts, Single-Family House, both with alley are limited street access garages and Accessory Units. No house in the BMS-NG District is intended to be farther than three blocks from any park, mini park or other type of open space. The landscape style is appropriate to a neighborhood with street trees and sidewalks.

d. BMS-NE District. The Neighborhood Edge District is the most restrictive residential district in Badger Mountain South. It is intended to allow a variety of low density and low intensity Single-Family Houses and Accessory Units on larger lots. The landscape style is appropriate to a neighborhood with street trees and sidewalks.

e. BMS-CIVIC District. The Civic District is intended to accommodate the open space, parks, trails, schools and other civic and community facilities in Badger Mountain South. With the exception of the school site located in the South Orchard neighborhood, school sites are intended to be held in reserve for a neighborhood school until the school district determines the site is not needed or it is used for the development of a private school. If reserved school sites do not develop as schools, other civic or housing uses will be developed there. Standards for civic facilities are intended to create places that are models of sustainable design and development.

f. BMS-SD-SR District. The Special District - Specialty Retail is intended to be an area for commercial activity that provides an attraction for local, regional and state-wide visitors by accommodating the growing interest in local and regional agricultural products, in particular the state wine industry. It allows wineries and wine making, other retail and commercial, as well as hospitality uses and services. It is intended to develop with an integrated site and amenity design in order to become a community gathering place with its own distinct style.

g. BMS-SD-CMU District. The Special District - Commercial Mixed-Use is intended to develop as a local destination for employment and shopping. It can accommodate campus-style office developments that provide a significant number of jobs. It also is a place for housing in mixed-use or live/ work buildings at higher intensities and densities found in multi-storied urban building types. It is intended to become the most intensive urban place in Badger Mountain South. The CMU District landscape edge is an urban trail that includes wider sidewalks, street trees and other landscaping and provides pedestrian connectivity to the adjacent neighborhoods.

h. BMS-SD-DR District. The Special District - Destination Retail -is applied to properties that lie west of Dallas Road. It is intended to become a notable gateway into the city from Interstate 82 by providing an integrated development concept that can accommodate higher intensity development. Development includes a mix of pedestrian-scale retail, big box retail, restaurant, entertainment, vehicle services and urban housing in live/work or commercial mixed-use structures. The landscape style is urban with street trees, sidewalks and landscape parking areas with internal pedestrian connectivity.

1.G LAND USES

1. Allowed Land Uses.

- a. A parcel or building in Badger Mountain South shall be occupied by only the land uses identified in Section 2.C. Land Use Table, within the district applied to the site by the Regulating Plan for Land Use and Urban form, Section 2.B. Each land use listed in Section 2.C. is defined in Section 14, Glossary.
- b. Any one or more land uses identified in Section 2.C. Land Use Table, as being allowed within a specific district may be established on any parcel in the district subject to the requirements as listed and the permit requirements of the RMC.

2. Unclassified Uses.

A land use that is not listed in Section 2.C. is not allowed, except as otherwise provided in section 1G.3.

3. Similar and compatible uses.

- a. The Director may determine that a proposed use not listed in Section 2.C. is allowable in compliance with the RMC procedure for similar use determinations; see RMC 23.08.065.
- b. When the Director determines that a proposed, but unclassified, use is similar to a listed use, the proposed use will be treated in the same manner as the listed use in determining where it is allowed, what permits are required, and what other standards of the LUDR and Master Agreement apply.

4. Additional City approval requirements.

- a. Any land use identified in 2.C. may require other City permits, licenses, and approvals, including but not limited to a building permit.
- b. Allowable land uses for each lot shall be shown on the plat documents.

5. Allowable land uses for each lot shall be shown on the plat documents.

1.H BMS MASTER AGREEMENT
CONSISTENCY DETERMINATION

1. In order to assure that all development activity within Badger Mountain South is consistent with the Master Agreement and the LUDR, all City permits and other approvals for any development within Badger Mountain South, including building permits, must include a Master Agreement Consistency Determination (BMS-MACD) issued by the Planning Manager. A level 1 BMS-MACD is required for all development applications, including building permits, except for final plat approval and issuance of a Certificate of Occupancy. A level 2 BMS-MACD is required for final plat approval and issuance of a final Certificate of Occupancy. The level 2 BMS-MACD can be issued by the City, even if bonding of certain improvements is allowed in lieu of immediate construction, or a temporary certificate is issued, subject to completion of punch list items, so long as the BMS-MACD finds that the development will be consistent with the Master Agreement and LUDR conditions upon the satisfactory completion of the bonded improvements in case of a final plat, and the punch list items in case of a Certificate of Occupancy.

2. All builders/developers are strongly encouraged to attend a pre-application meeting with the Badger Mountain South Master Plan Administrator (BMS-MPA). The BMS-MPA is designated by the Badger Mountain South Master Agreement to provide guidance to builders/developers on how to apply the provisions of the LUDR to land use development applications.

3. The purpose of the pre-application meeting is to provide a roadmap through the LUDR provisions that apply to a proposal, identify possible changes to a proposal to meet the BMS intent, receive information on the application submittal and next steps, and to answer any other questions.

4. A pre-application meeting should occur early in the planning phase when a project proposal is defined enough to provide conceptual plans but still flexible to consider recommendations from the BMS-MPA.

5. The purpose of the BMS-MACR is to provide a written recommendation to the City of Richland Development Services Department that the application/submittal is or is not consistent with the terms and conditions of the BMS Master Agreement and compliant with the provisions of the LUDR. Approvals in accordance with the LUDR are an administrative review unless otherwise noted.

6. The BMS-MPA will provide the City and the applicant a BMS-MACR, or if the submittal is found to be inconsistent, will work with the applicant to identify options that meet the LUDR requirements and the applicant’s intent. If the proposal is found to be inconsistent with the LUDR, the BMS-MACR will identify both areas of consistency and areas of inconsistency.

7. In some instances minor inconsistencies from the substantive requirements of the LUDR standards may be acceptable if they meet certain criteria and represent an equivalent or superior design solution to what would otherwise be achieved by rigidly applying the specific requirements. Minor deviations to the LUDR may be approved by the Administrative Official following the City’s minor amendment process under it’s Planned Unit Development Code (RMC 23.50.070).

8. A Level 2 BMS-MACR is required prior to final plat approval or issuance of Certificate of Occupancy. A Level 2 BMS-MACR ensures that the final submittal meets the Master Agreement and LUDR requirements. A Level 2 BMS-MACR will be provided to the City of Richland Development Services Department to be evaluated along with the applicant’s other RMC required submittals.

1.1 HOW TO USE THE LAND USE AND
DEVELOPMENT REGULATIONS

1. The LUDR provides guidance for anyone wanting to develop or build within the Badger Mountain South community. Although complementary to the Richland Municipal Code (RMC), it is organized differently than the RMC. This section of the LUDR explains how to use the use provision contained here.
2. No matter what type of development is proposed, always start with Section 2, Urban Form Districts, Land Uses and Building Types. In Section 2.B, the Regulating Map for Land Use and Urban Form, is the regulating map of Districts that govern the types of buildings that can be built and the types of uses that can be established.
3. Section 2.C, the Land Use Table, shows broad categories of uses that are allowed in each of the districts. Definitions of each use listed with typical examples are included in Section 14, Glossary.
4. Section 2.D, Building Types Table, lists 12 types of buildings that may be constructed and in which district each Building Type is permitted. Photographs of each Building Type are provided in Section 2.E as illustrative examples.
5. The remainder of the LUDR, Sections 3 through 13, identifies standards that apply to development activity including plats, subdivisions, site plans and building. Not all subsequent sections apply to every type of development activity.

1.1 SUBMITTAL REVIEW PROCESS

Submittal Review Process							
Step 1	Step 2	Step 3	Step 4	Step 5	Step 6	Step 7	Step 8
Plat or Subdivision (Refer to Section 1.C.2.c)							
Pre-application meeting with MPA to discuss use and compliance with LUDR and Master Agreement.	Prepare Preliminary Plat application using LUDR and Master Agreement standards and RMC Chapter 24.12 requirements.	Submit Preliminary Plat application to City; City forwards a copy to MPA for Level 1 BMS-MACR.	MPA reviews application for consistency with Master Agreement and LUDR; Level 1 BMS-MACR issued to applicant and City.	Follow City Preliminary Plat Process.	Submit Final Plat application to City; City forwards a copy to MPA for Level 2 BMS-MACR.	MPA reviews application for consistency with Master Agreement and LUDR; Level 2 BMS-MACR issued to applicant and City.	Follow City Final Plat Process.
Short Subdivision (Refer to Section 1.C.2.c)							
Pre-application meeting with MPA to discuss use and application of the LUDR and Master Agreement.	Prepare Short Subdivision application using LUDR and Master Agreement standards and RMC Chapter 24.13 requirements.	Submit Short Subdivision application to City; City forwards a copy to MPA for Level 1 BMS-MACR.	MPA reviews application for consistency with Master Agreement and LUDR; Level 1 BMS-MACR issued to applicant and City.	Follow City Short Subdivision Process.			
Binding Site Plan (Refer to Section 1.C.2.e)							
Pre-application meeting with MPA to discuss use and compliance with LUDR and Master Agreement.	Prepare Binding Site Plan application using LUDR and Master Agreement standards and RMC Chapter 24.14 requirements.	Submit Binding Site Plan application to City; City forwards a copy to MPA for Level 1 BMS-MACR.	MPA reviews application for consistency with Master Agreement and LUDR; Level 1 BMS-MACR issued to applicant and City.	Follow City Binding Site Plan Process.			
Site Plan Review (Refer to Section 1.C.2.d)							
Pre-application meeting with MPA to discuss use and compliance with LUDR and Master Agreement.	Prepare Site Plan application using LUDR and Master Agreement standards and RMC Chapter 23.48 requirements.	Site Plan application to City; City forwards a copy to MPA for Level 1 BMS-MACR.	MPA reviews application for consistency with Master Agreement and LUDR; Level 1 BMS-MACR issued to applicant and City.	Follow City Site Plan Review process.			
Building Permit							
Pre-application meeting with MPA to discuss use and compliance with LUDR and Master Agreement.	Prepare Building Permit Application using LUDR and Master Agreement standards.	Submit Building Permit application to City; City forwards a copy to MPA for Level 1 BMS-MACR.	MPA reviews application for consistency with Master Agreement and LUDR; Level 1 BMS-MACR issued to applicant and City.	Follow City Building Permit application process.	Level 2 BMS-MACR issued prior to issuance of a Certificate of Occupancy.		

PROPOSED AMENDMENTS ARE SHOWN:

1.1 HOW TO USE THE LAND USE AND DEVELOPMENT REGULATIONS

1. The LUDR provides guidance for anyone wanting to develop or build within the Badger Mountain South community. Although complementary to the Richland Municipal Code (RMC), it is organized differently than the RMC. This section of the LUDR explains how to use the code provision contained here.
2. No matter what type of development is proposed, always start with Section 2, Urban Form Districts, Land Uses and Building Types. In Section 2.B, the Regulating Plan for Land Use and Urban Form, is the regulating map of Districts that govern the types of buildings that can be built and the types of uses that can be established.
3. Section 2.C, the Land Use Table, shows broad categories of uses that are allowed in each of the districts. Definitions of each use listed with typical examples are included in Section 14, Glossary.
4. Section 2.D, Building Types Table, lists 12 types of buildings that may be constructed and in which district each Building Type is permitted. Photographs of each Building Type are provided in Section 2.E as illustrative examples.
5. The remainder of the LUDR, Sections 3 through 13, identifies standards that apply to development activity including plats, subdivisions, site plans and building. Not all subsequent sections apply to every type of development activity.

LIST OF ACRONYMS

LUDR	Land Use Development Regulations
MPA	Master Plan Administrator
RMC	Richland Municipal Code
MACR	Master Agreement Consistency Recommendation
MACD	Master Agreement Consistency Determination
MPA	Master Plan Administrator

1.2 SUBMITTAL REVIEW PROCESS

Submittal Review Process							
Step 1	Step 2	Step 3	Step 4	Step 5	Step 6	Step 7	Step 8
Plat or Subdivision (Refer to Section 1.C.2.c)							
Pre-application meeting with MPA to discuss use and compliance with LUDR and Master Agreement.	Prepare Preliminary Plat application using LUDR and Master Agreement standards and RMC Chapter 24.12 requirements.	MPA reviews application for consistency with Master Agreement and LUDR; Level 1 BMS-MACR issued to applicant.	Submit Preliminary Plat application and Level 1 BMS-MACR to City.	Follow City Preliminary Plat Process.	MPA reviews Final Plat application for consistency with Master Agreement and LUDR; Level 2 BMS-MACR issued to applicant.	Submit Final Plat application and Level 2 BMS-MACR to City.	Follow City Final Plat Process. City issues Level 2 BMS-MACD.
Short Subdivision (Refer to Section 1.C.2.c)							
Pre-application meeting with MPA to discuss use and application of the LUDR and Master Agreement.	Prepare Short Subdivision application using LUDR and Master Agreement standards and RMC Chapter 24.13 requirements.	MPA reviews application for consistency with Master Agreement and LUDR; Level 1 BMS-MACR issued to applicant.	Submit Short Subdivision application and Level 1 BMS-MACR to City.	Follow City Short Subdivision Process.			
Binding Site Plan (Refer to Section 1.C.2.e)							
Pre-application meeting with MPA to discuss use and compliance with LUDR and Master Agreement.	Prepare Binding Site Plan application using LUDR and Master Agreement standards and RMC Chapter 24.14 requirements.	MPA reviews application for consistency with Master Agreement and LUDR; Level 1 BMS-MACR issued to applicant.	Submit Binding Site Plan application and Level 1 BMS-MACR to City.	Follow City Binding Site Plan Process.			
Site Plan Review (Refer to Section 1.C.2.d)							
Pre-application meeting with MPA to discuss use and compliance with LUDR and Master Agreement.	Prepare Site Plan application using LUDR and Master Agreement standards and RMC Chapter 23.48 requirements.	MPA reviews application for consistency with Master Agreement and LUDR; Level 1 BMS-MACR issued to applicant.	Submit Site Plan application and Level 1 BMS-MACR to City.	Follow City Site Plan Review process.			
Building Permit							
Pre-application meeting with MPA to discuss use and compliance with LUDR and Master Agreement.	Prepare Building Permit Application using LUDR and Master Agreement standards.	MPA reviews application for consistency with Master Agreement and LUDR; Level 1 BMS-MACR issued to applicant.	Submit Building Permit application and Level 1 BMS-MACR to City.	Follow City Building Permit application process.	City issues Level 1 BMS-MACD and building permit to applicant.	Level 2 BMS-MACR issued to applicant and city prior to issuance of a Certificate of Occupancy.	City issues Level 2 BMS-MACD and Certificate of Occupancy to applicant.



**URBAN FORM
DISTRICTS,
LAND USES AND
BUILDING TYPES**

2

Section 2 identifies the Urban Form Districts, allowed Land Uses, and associated Building Types for all properties within the Badger Mountain South community.

2.A Introduction.....2-2

2.B Regulating Plan For Land Use and Urban Form.....2-2

2.C Land Use Table.....2-3

2.D Building Type Table.....2-4

2.E Building Type Examples.....2-4

2.A INTRODUCTION

In order to achieve the intent of the LUDR as set forth in Section 1.A, as well as the other provisions of the Master Agreement, Badger Mountain South is divided into eight Urban Form Districts. Each District allows certain types of buildings and uses, identifies development intensity, employs District-specific development standards and defines the relationship of the parcels in the District to public right of ways.

The Districts and boundaries of the Districts are established as shown in Figure 2.B. Regulating Plan for Land Use and Urban Form.

The official Badger Mountain South map, called the Regulating Plan for Land Use and Urban Form, is found at Figure 2.B. The boundaries of the Districts shown, govern the uses of land, buildings, and structures within that District. Districts also govern the size of yards, the types of buildings and the heights of those buildings and other structures. These are the regulations that have been established and declared to be in effect on all land included within the boundary of each and every District shown in the official Badger Mountain South map.

DISTRICT LEGEND

The legend identifies the color associated with each District and provides a short introduction to the District intent. The Regulating Plan for Land Use and Urban Form, 2.B, shows where each District is located within Badger Mountain South.

BMS-VMU: VILLAGE MIXED-USE (3.B)

The Village Mixed-Use (VMU) Districts are the most urban areas of Badger Mountain South. They allow commercial uses, housing located above ground floor commercial spaces, Live/Work, Stacked Units and Row Houses.

BMS-NC: NEIGHBORHOOD COLLECTOR (3.C)

The Neighborhood Collector District allows a variety of Multi-family attached housing options as well as smaller scale commercial and Mixed-Uses.

BMS-NG: NEIGHBORHOOD GENERAL (3.D)

The Neighborhood General District makes up the largest area of Badger Mountain South. This District allows Single-Family detached residential with a mix of smaller scale attached housing options.

BMS-NE: NEIGHBORHOOD EDGE (3.E)

The Neighborhood Edge District allows residential uses in detached Single-Family houses and related uses that are compatible and common to Single-Family houses.

BMS-CIVIC (3.F)

The Civic District contains the open space, parks, schools, civic and community spaces. Development in this District is primarily intended for Civic, Community and Institutional Facilities. See also Illustrative Plan for Civic Space Layout, 5.B for detail.

SPECIAL DESIGNATION “-P” OVERLAY DISTRICT

SPECIAL DISTRICT LEGEND

BMS-SD-SR: SPECIALTY RETAIL (4.B)

The Specialty Retail Special District is intended to support the growing interest in local and regional agricultural products, in particular the local wine industry.


BMS-SD-CMU: COMMERCIAL MIXED-USE (4.C)

The Commercial Mixed-Use Special District is a local destination for employment, shopping, dining, entertainment and recreation.

BMS-SD-DR: DESTINATION RETAIL (4.D)

The Destination Retail Special District contains large scale retail uses serving the entire region.

2.B REGULATING PLAN FOR LAND USE AND URBAN FORM

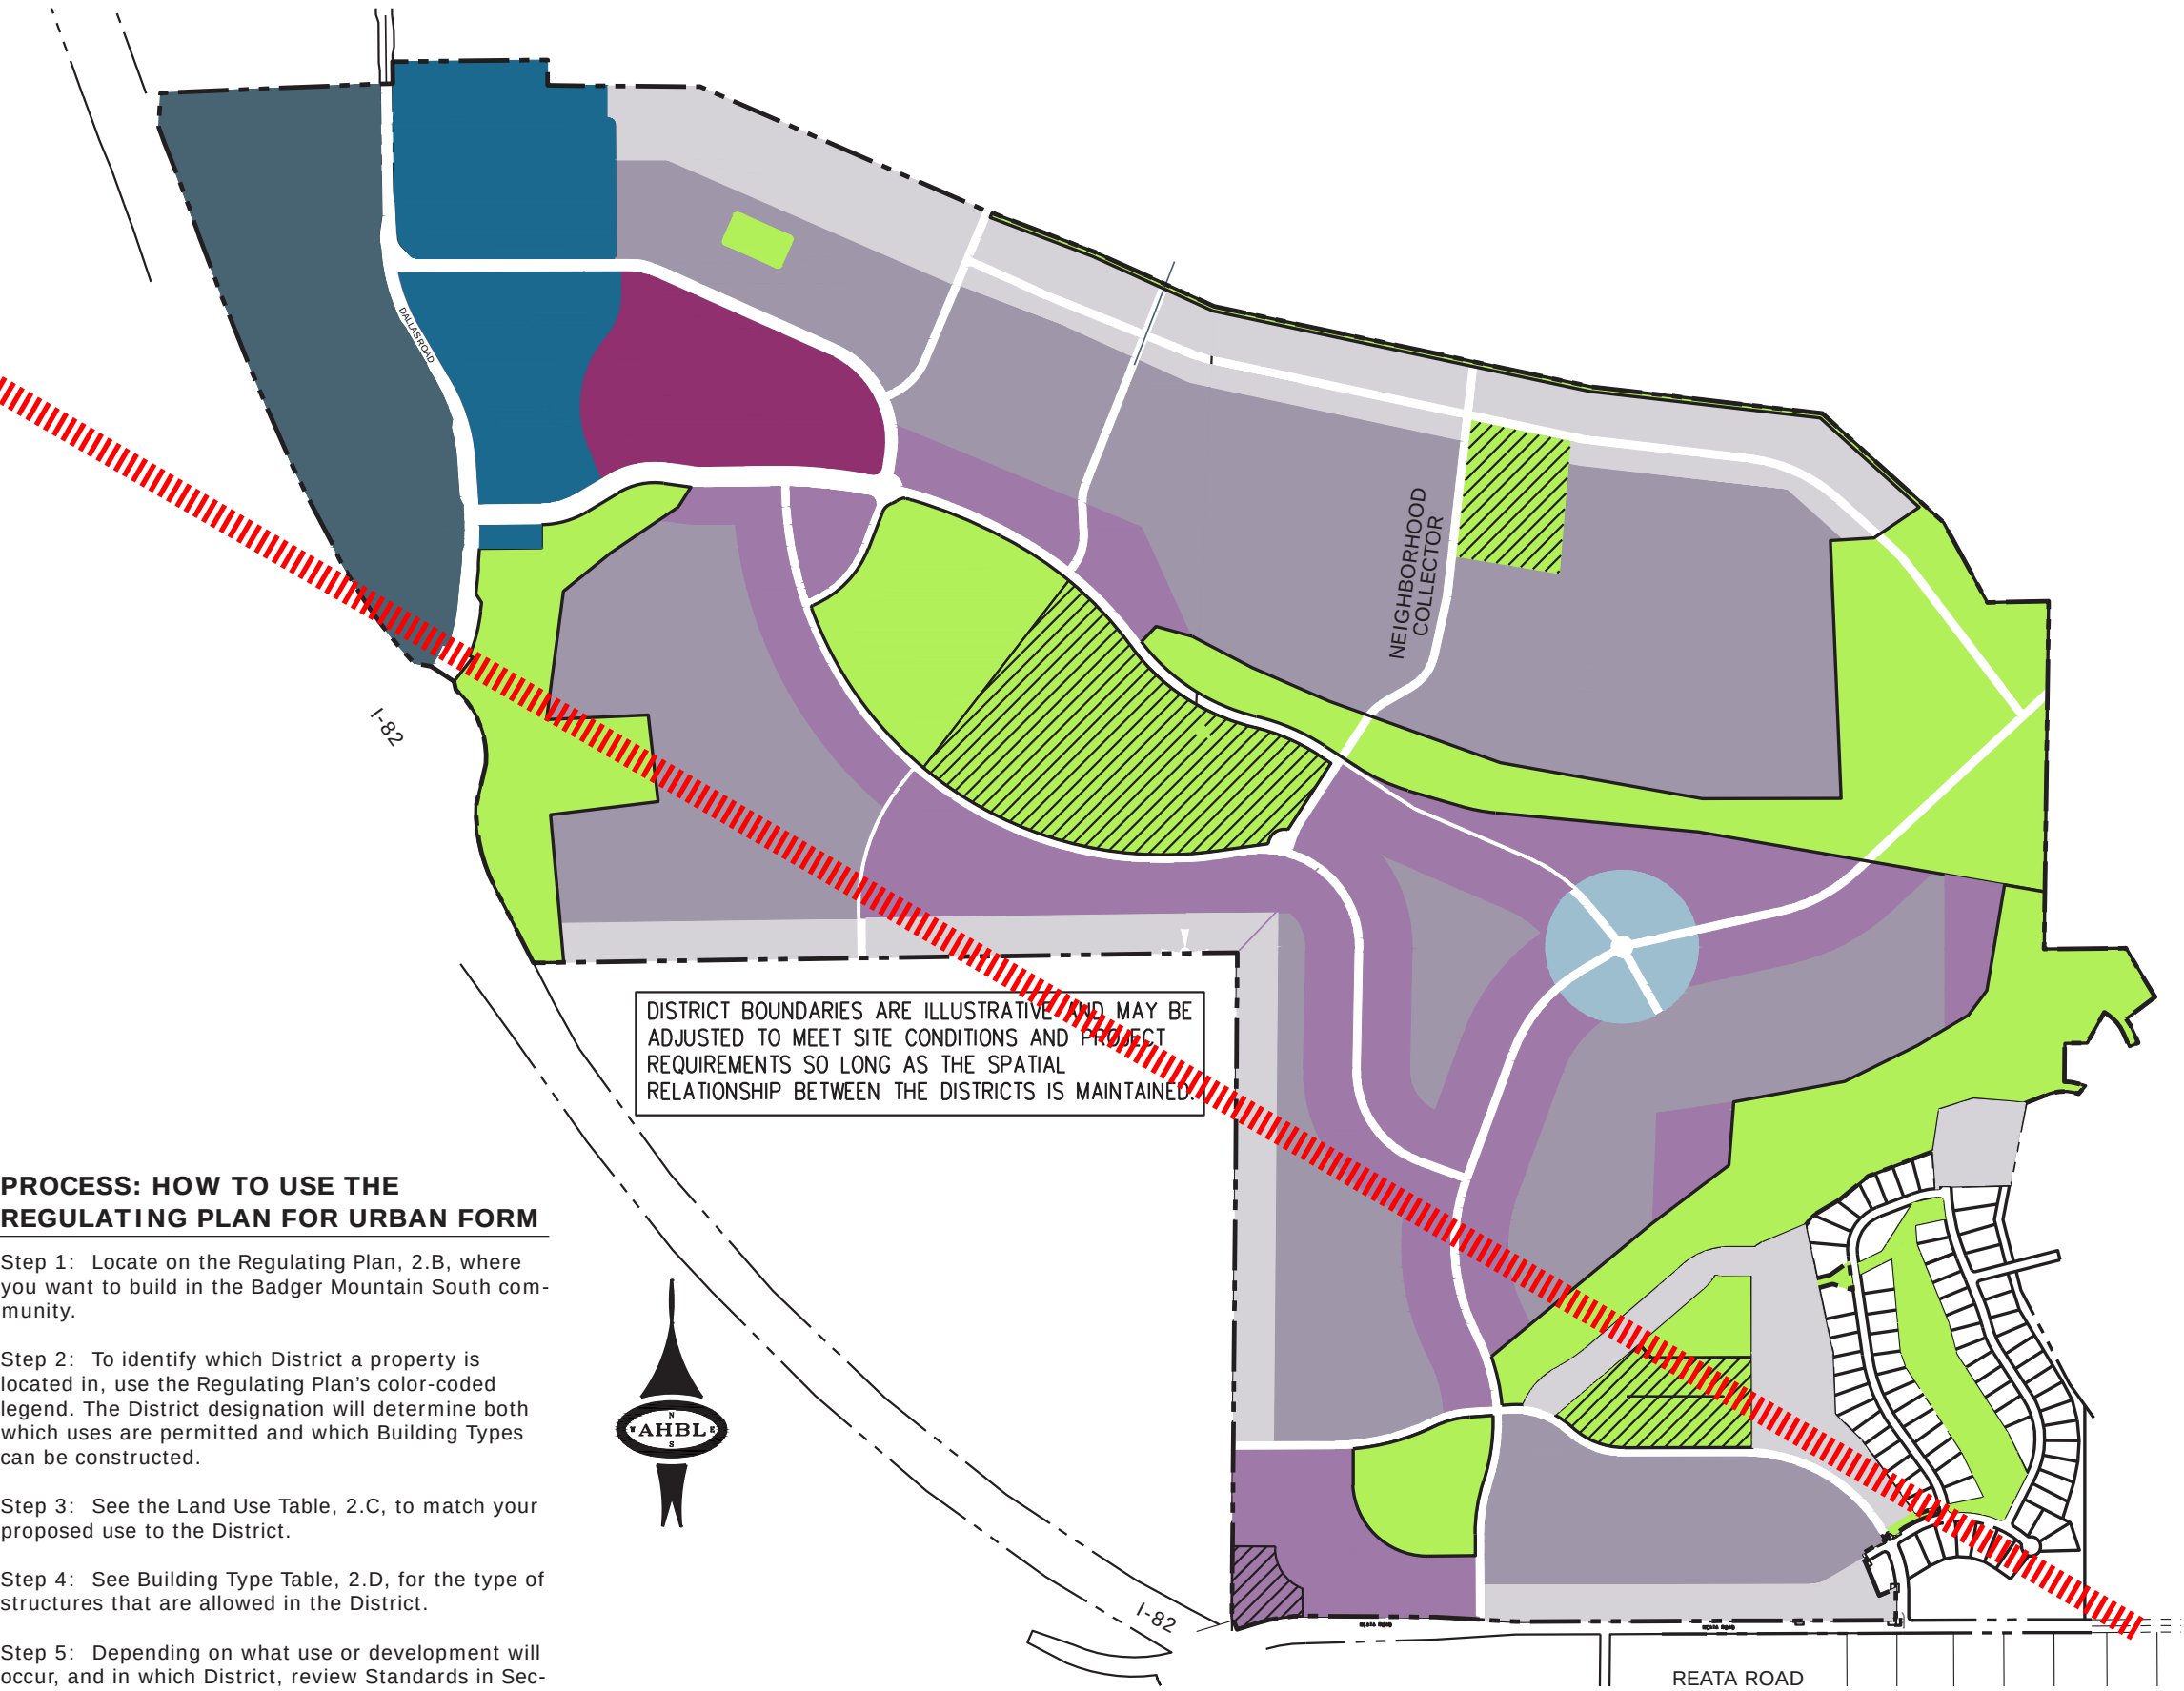

PROCESS: HOW TO USE THE
REGULATING PLAN FOR URBAN FORM

Step 1: Locate on the Regulating Plan, 2.B, where you want to build in the Badger Mountain South community.

Step 2: To identify which District a property is located in, use the Regulating Plan's color-coded legend. The District designation will determine both which uses are permitted and which Building Types can be constructed.

Step 3: See the Land Use Table, 2.C, to match your proposed use to the District.

Step 4: See Building Type Table, 2.D, for the type of structures that are allowed in the District.

Step 5: Depending on what use or development will occur, and in which District, review Standards in Sections 3 – 13 for applicability.

2.A INTRODUCTION

In order to achieve the intent of the LUDR as set forth in Section 1.A, as well as the other provisions of the Master Agreement, Badger Mountain South is divided into eight Urban Form Districts. Each District allows certain types of buildings and uses, identifies development intensity, employs District-specific development standards and defines the relationship of the parcels in the District to public right of ways.

The Districts and boundaries of the Districts are established as shown in Figure 2.B. Regulating Plan for Land Use and Urban Form.

The official Badger Mountain South map, called the Regulating Plan for Land Use and Urban Form, is found at Figure 2.B. The boundaries of the Districts shown, govern the uses of land, buildings, and structures within that District. Districts also govern the size of yards, the types of buildings and the heights of those buildings and other structures. These are the regulations that have been established and declared to be in effect on all land included within the boundary of each and every District shown in the official Badger Mountain South map.

DISTRICT LEGEND

The legend identifies the color associated with each District and provides a short introduction to the District intent. The Regulating Plan for Land Use and Urban Form, 2.B, shows where each District is located within Badger Mountain South.

BMS-VMU: VILLAGE MIXED-USE (3.B)

The Village Mixed-Use (VMU) Districts are the most urban areas of Badger Mountain South. They allow commercial uses, housing located above ground floor commercial spaces, Live/Work, Stacked Units and Row Houses.

BMS-NC: NEIGHBORHOOD COLLECTOR (3.C)

The Neighborhood Collector District allows a variety of Multi-family attached housing options as well as smaller scale commercial and Mixed-Uses.

BMS-NG: NEIGHBORHOOD GENERAL (3.D)

The Neighborhood General District makes up the largest area of Badger Mountain South. This District allows Single-Family detached residential with a mix of smaller scale attached housing options.

BMS-NE: NEIGHBORHOOD EDGE (3.E)

The Neighborhood Edge District allows residential uses in detached Single-Family houses and related uses that are compatible and common to Single-Family houses.

BMS-CIVIC (3.F)

The Civic District contains the open space, parks, schools, civic and community spaces. Development in this District is primarily intended for Civic, Community and Institutional Facilities. See also Illustrative Plan for Civic Space Layout, 5.B for detail.

SPECIAL DESIGNATION “-P” OVERLAY DISTRICT

SPECIAL DISTRICT LEGEND

BMS-SD-SR: SPECIALTY RETAIL (4.B)

The Specialty Retail Special District is intended to support the growing interest in local and regional agricultural products, in particular the local wine industry.


BMS-SD-CMU: COMMERCIAL MIXED-USE (4.C)

The Commercial Mixed-Use Special District is a local destination for employment, shopping, dining, entertainment and recreation.

BMS-SD-DR: DESTINATION RETAIL (4.D)

The Destination Retail Special District contains large scale retail uses serving the entire region.

2.B REGULATING PLAN FOR LAND USE AND URBAN FORM

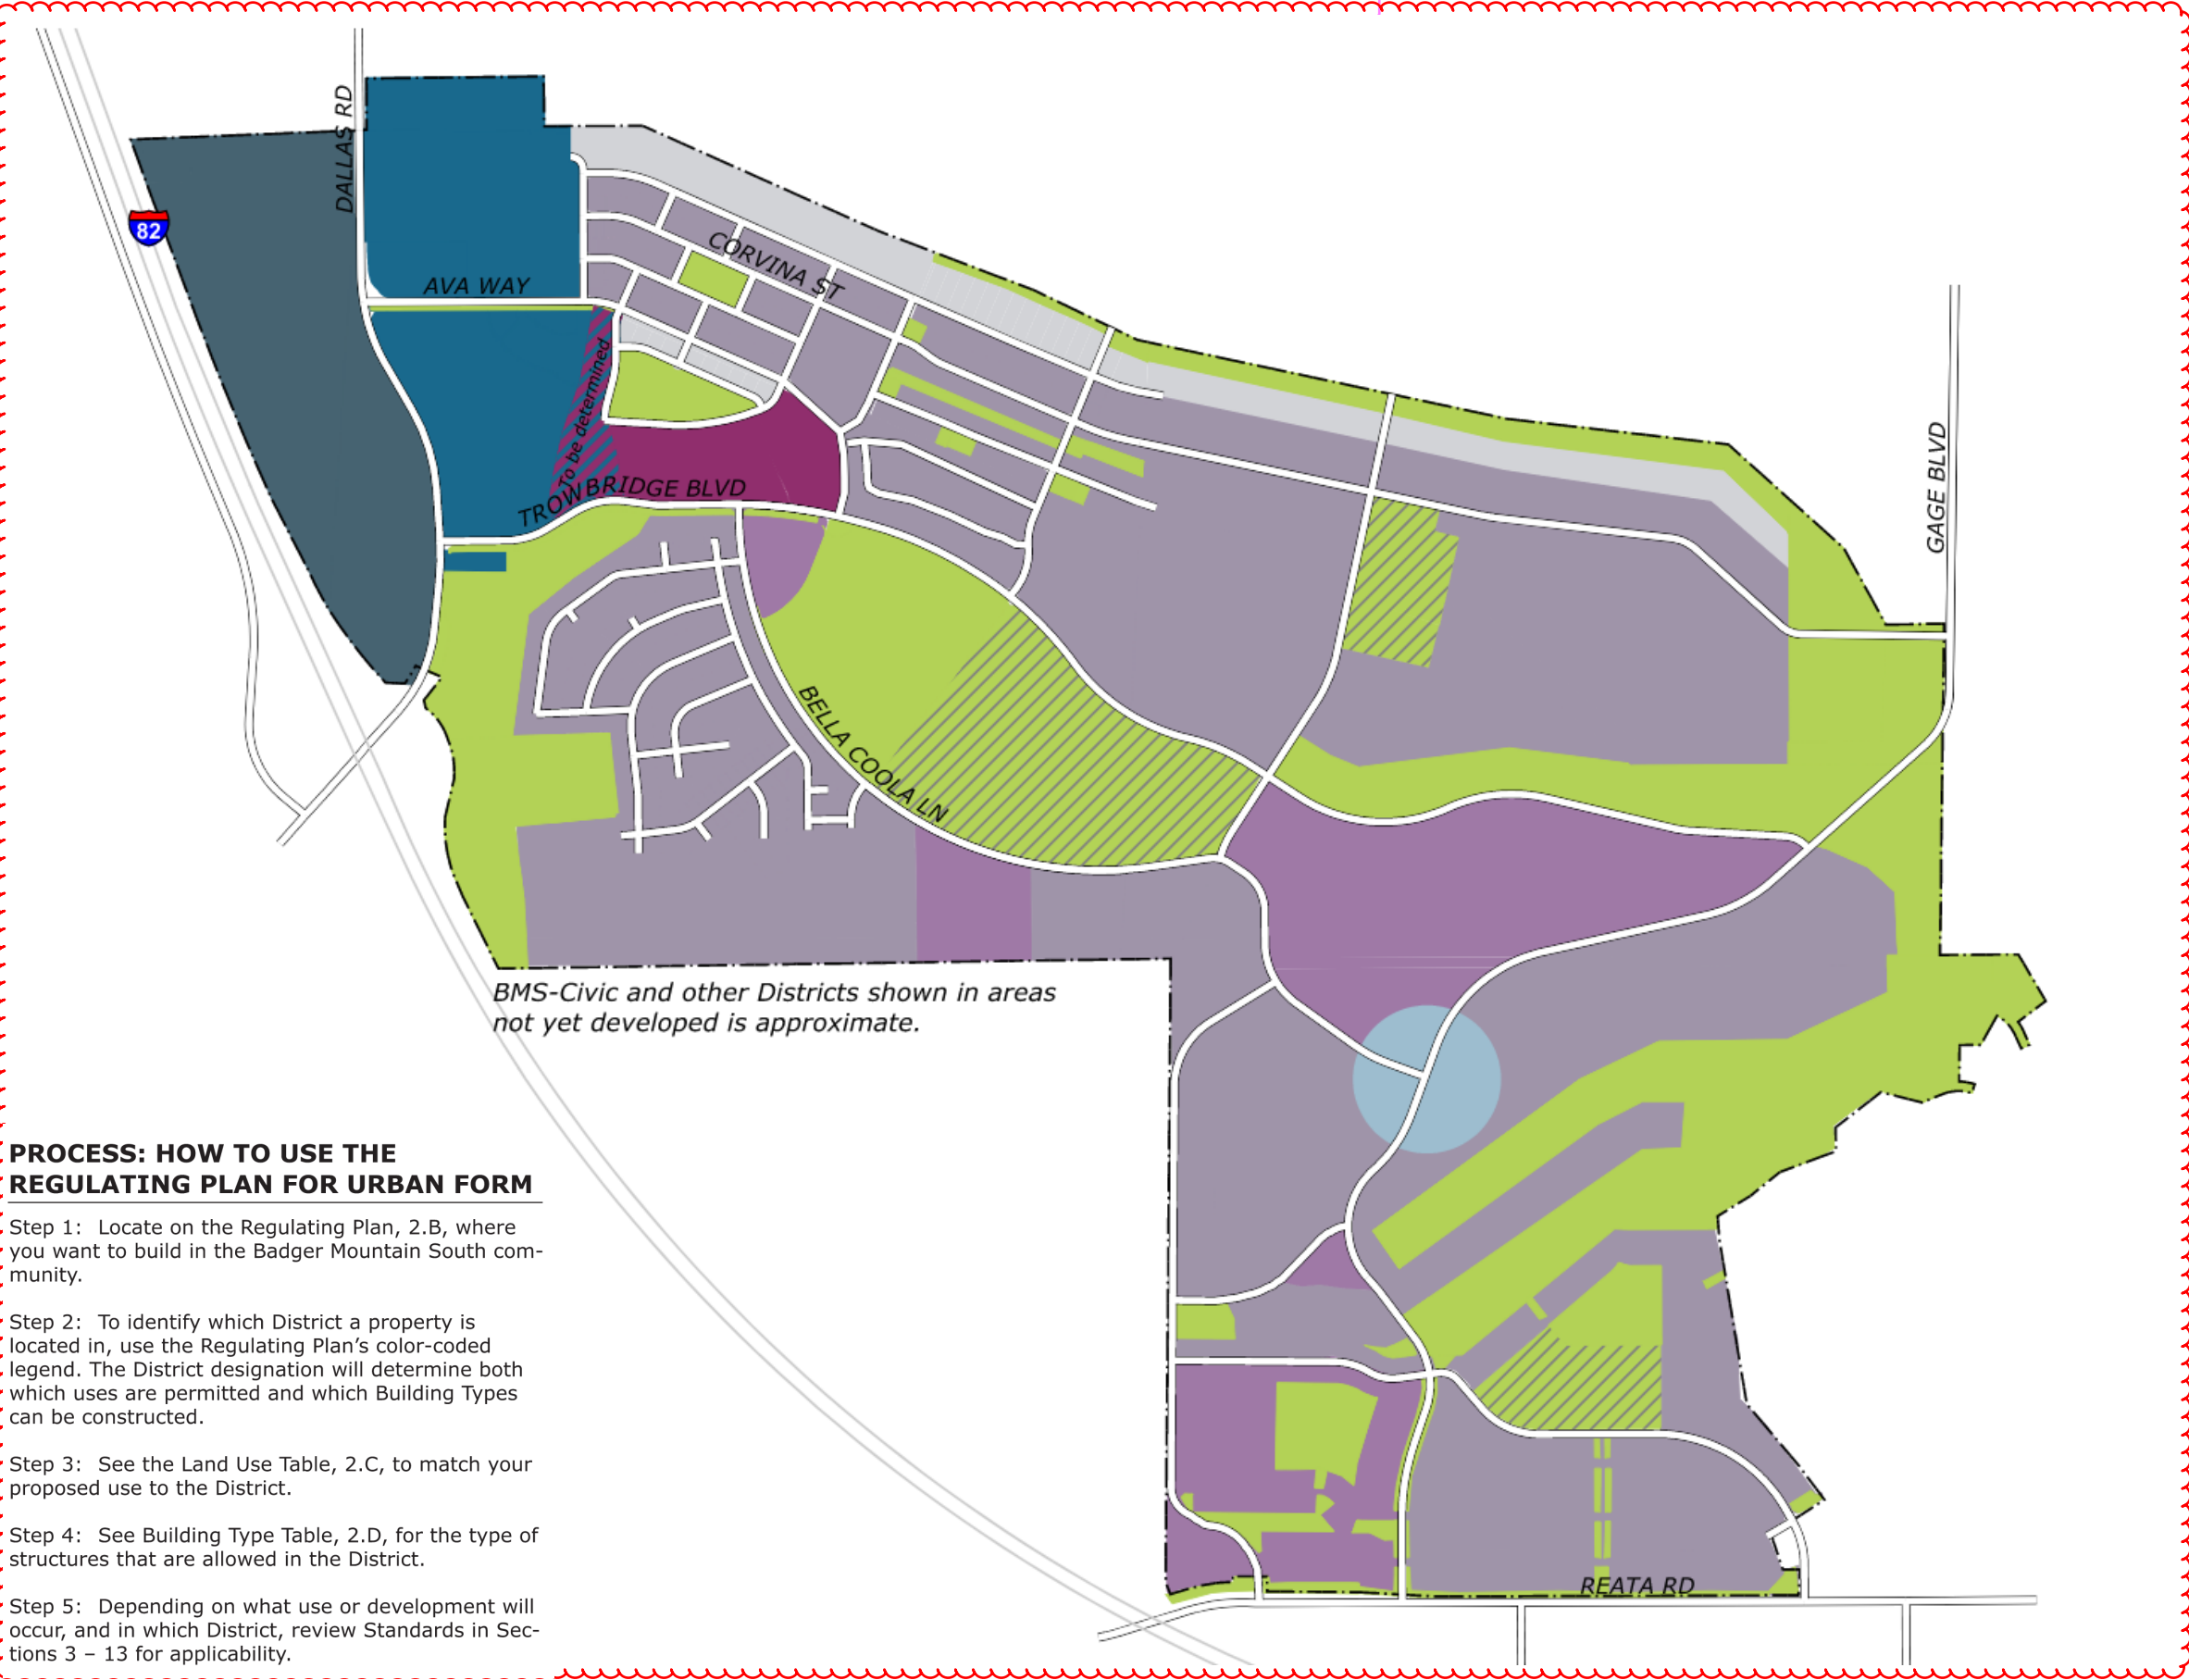

PROCESS: HOW TO USE THE REGULATING PLAN FOR URBAN FORM

- Step 1: Locate on the Regulating Plan, 2.B, where you want to build in the Badger Mountain South community.
- Step 2: To identify which District a property is located in, use the Regulating Plan's color-coded legend. The District designation will determine both which uses are permitted and which Building Types can be constructed.
- Step 3: See the Land Use Table, 2.C, to match your proposed use to the District.
- Step 4: See Building Type Table, 2.D, for the type of structures that are allowed in the District.
- Step 5: Depending on what use or development will occur, and in which District, review Standards in Sections 3 – 13 for applicability.

LAND USES ALLOWED BY DISTRICT											
Land Use Types	<i>P= Permitted by right P+Number = see Land Use Notes</i>	BMS-VMU	BMS-NC	-P	BMS-NG	BMS-NE	BMS-CIVIC	-P	BMS SD-SR	BMS SD-CMU	BMS SD-DR
Residential	Single-family	-	P		P	P	-	P-29	P	-	-
	Multi-family	P-1	P-2, 3		P-3	-	-	P-29	P-4	P-4	P-4
	Senior Housing	P-5	P		-	-	-	P-29	-	P-6	P-6
	Assisted Living/Nursing Home	P-7	P		-	-	-	P-29	-	P	-
	Accessory Unit	-	P-8		P-8	P-8	-	P-29	P	-	-
	Adult Family Home	-	-		P	P	-	P-29	-	-	-
Retail	Neighborhood Retail	P	P		-	-	-	P-29	P	P	P
	General Retail	P	P		-	-	-	P-29	P	P	P
	Large Scale Retail	-	-		-	-	-	P-29	P-11	P-10	P
	Parking Structures	P-13	-		-	-	-	P-29	P	P	P
Services	Neighborhood Personal Services	P	P/P-12		P-12	P-12	-	P-29	P	P	P
	General Services	P	P		-	-	-	P-29	P-11	P	P
	Eating and Drinking Establishments		P-14		-	-	-	P-29	P	P	P
	Child Care	P-15	P-15/P-16		P-16	P-16	-	P-29	-	P-15	P-15
	Vehicular Services	P-17	-		-	-	-	P-29	-	P-18	P-18
	Storage	-		P-19	P-19	-	-	P-29	-	P-13	P-13
	Hospitality/Lodging	P			-	P-20	-	P-29	P	P	P
Office	Neighborhood Office	P	P/P-12		P-12	P-12	-	P-29	P	P	P
	General Office	P	P		-	-	-	P-29	P	P	P
	Accessory Office	P	-		-	-	-	P-29	P	P	P
Civic	Public Facilities	P	-		P-30	-	P	P-29	P	P	P
	Recreation and Cultural Facilities, Public and Private	P	-		P	-	P	P-29	P	P	P
	Place of Worship	P	P-21		P	-	P-33	P-29	-	-	-
	Solar Panels or Arrays	P	P		P		P-22	P-29	P	P	P
Other	Vineyards and Other Agricultural Uses	-	-		-	P-23	P	P-29	P-24	-	-
	Telecommunications Facilities	P-25	-		-	-	P-32	P-29	-	P-32	P-32
	Parking lots	P	P		-	-	P-22	P-29	P	P	P
	Drive-through Window Service	P-26	P/P-26		-	-	-	P-29	P-26	P-26	P-26
	Vending Carts	P-27	-		-	-	-	P-29	P-27	P-27	P-27
	Temporary Uses	P-28	-		-	-	-	P-29	P-28	P-28	P-28
	Special Events	P	-		-	-	P	P-29	P	P	P
	Gambling Premises	-	-		-	-	-	P-29	-	-	P

2.C LAND USE TABLE

The Land Use Table categorizes the range of uses or functions which may occupy a building in each of the Districts. The Districts are identified by name and by color-coded legend across the top bar of the table and the uses are identified in the column on the left of the table. These functional classifications are defined and examples are provided in Section 14, the Glossary.

The functional classifications or uses are identified for each District as “P”, permitted by right, or “P-Number” which refers to the numbered Notes Table 2.C.1 below for additional information, restrictions or exclusions. If there is neither reference, the use is not permitted within that District.

The City’s Administrative Official may allow a use that is unlisted in the Land Use Table if all conditions of LUDR 1.G.3 apply.

 Indicates -P Overlay District - see 2.B, Regulating Plan for Land Use and Urban Form for specific locations.

2.C.1 LAND USE TABLE NOTES

1. Multi-family housing includes the following Building Types – Live/Work; Commercial/Mixed-Use/Liner over commercial or office; Stacked Units; Row Houses.

a. Alley-access, Single-family Building Type is permitted.
2. Multi-family housing includes the following Building Types – Duplex; Mansion Apartment; Courtyard Housing; Row House; Live/Work; Commercial/Mixed-Use/Liner and Stacked Units.
3. Multi-family housing includes: Duplex - up to two per Block face, Courtyard Housing, and Mansion Apartments limited to block ends across from open space.
4. Multi-family housing includes the following Building Types – Live/work; Row house; Commercial/Mixed-use/Liner over commercial and Stacked Units
5. Unused
6. Senior Housing permitted above ground floor commercial or office, or when constructed in a multi-story building.
7. Assisted Living/Nursing Homes permitted on corner lots at intersection of two Arterial Collector Streets.
8. One Accessory Unit, not to exceed 600 sq. ft., per lot is permitted either within the principal structure or an accessory structure. Other provisions of RMC 23.42.020 apply.
9. Unused
10. When one part of a larger office-retail development.
11. When food or winery-related.
12. Permitted when operated as a Home Occupation without any occupational vehicles associated with the Home Occupation, and as otherwise defined and regulated in RMC 23.42.090.

13. When totally enclosed within a building or in a Liner Building Type.
14. For areas other than those across the street from the BMS-VMU District: Eating establishments located in buildings on a corner lot of two Collector Streets, or within a larger building as an ancillary use; not more than one per block; May seat 20 and fewer patrons, not operate between 11 p.m. and 6 a.m., and not sell alcoholic beverages.
15. When licensed as a Child Care Center and meets RMC 23.42.080(A-D, F) requirements. In the BMS-NC District, must be located on corner lots.
16. When licensed for Family Home Child Care only and meets other requirements of RMC .23.42.080 (A-D, F) requirements.
17. Within the East Market BMS-VMU District when located on an Arterial Collector Street; may include a convenience store as an incidental use. Subject to standards for Neighborhood Goods and Services Building Type, otherwise meet RMC 23.42.270 or 23.42.280 requirements.
18. Subject to standards for Neighborhood Goods and Services Building Type, otherwise meet RMC 23.42.270 or 23.42.280 requirements.
19. In the BMS-NG District only one neighborhood storage area up to 1 acre in size for boats, vehicles and/or recreational vehicles shall be permitted within each of the five residential neighborhoods; no storage of junk, materials or other items permitted. Subject to landscape screening standards found in Sec.11.C.8 and fencing standards found in Section 13.A.3. Storage area larger than 1 acre in size for boats, vehicles and/ or recreational vehicles permitted in BMS-NC-P Overlay District subject to standards in Sec. 3.C.
20. A Bed and Breakfast facility providing a maximum of four rental rooms and subject to the provisions of RMC 23.42.045 (A)-(D).

21. Maximum lot size of 6 acres.
22. Solar panels, or arrays, which serve individual residences or buildings, are permitted accessory uses in all zones. A grouping of multiple solar panels to serve multiple users may be placed within the BMS-Civic Districts, subject to Administrative review that: the size and dimension of the site is adequate; they do not interfere with planned or sited public amenities; and any identified impacts to adjacent properties have been adequately mitigated.
23. Vineyards are considered landscape materials in residential Districts when planted by the homeowner for personal use.
24. Vineyards including wine making facilities, enclosed storage and related production.
25. Micro facilities and nano facilities permitted as defined and regulated in RMC 23.62.
26. Must meet additional requirements of RMC 23.42.047 and any unique master site plan.
27. Subject to standards found in RMC 5.14.
28. When ancillary and seasonal to primary retail.
29. BMS-Civic-P Overlay District: Use restricted to school site until such time as restrictions on land use set forth in the BMS-Master Agreement are removed. At that time, all of the uses that are marked with the P-29 footnote are permitted, subject to any further conditions imposed by other applicable footnotes.
30. Block Parks, Local Parks and Greenbelts are allowed to be constructed in the BMS-NG District.
31. Unused
32. When accessory to an adjacent use and subject to Section 11.C standards.
33. When co-developed with another facility.

PROPOSED 2020 AMENDMENTS
ARE SHOWN:

LAND USES ALLOWED BY DISTRICT											
Land Use Types	<i>P= Permitted by right P+Number = see Land Use Notes Table Notes</i>	BMS-VMU	BMS-NC	-P	BMS-NG	BMS-NE	BMS-CIVIC	-P	BMS SD-SR	BMS SD-CMU	BMS SD-DR
Residential	Single-family	-	P	P	P	P	-	P-29	P	P-4 P	-
	Multi-family	P-1	P-2, 3	P-2,3	P-3	-	-	P-29	P-4	P-4 P-2	P-4
	Senior Housing	P-5	P	P	-	-	-	P-29	-	P-6	P-6
	Assisted Living/Nursing Home	P-7	P	P	-	-	-	P-29	-	P	-
	Accessory Unit	-	P-8	P-8	P-8	P-8	-	P-29	P	P-8 P	-
	Adult Family Home	-	-	-	P	P	-	P-29	-	P-8 P	-
Retail	Neighborhood Retail	P	P	P	-	-	-	P-29	P	P	P
	General Retail	P	P	P	-	-	-	P-29	P	P	P
	Large Scale Retail	-	-	-	-	-	-	P-29	P-11	P-10	P
	Parking Structures	P-13	-	-	-	-	-	P-29	P	P	P
Services	Neighborhood Personal Services	P	P/P-12	P/P-12	P-12	P-12	-	P-29	P	P	P
	General Services	P	P	P	-	-	-	P-29	P-11	P	P
	Eating and Drinking Establishments	P	P-14	P-14	-	-	-	P-29	P	P	P
	Child Care	P-15	P-15/P-16	P-15/P-16	P-16	P-16	-	P-29	-	P-15	P-15
	Vehicular Services	P-17	-	-	-	-	-	P-29	-	P-18	P-18
	Storage	-	-	P-19	P-19	-	-	P-29	-	P-13	P-13
	Hospitality/Lodging	P	-	-	-	P-20	-	P-29	P	P	P
Office	Neighborhood Office	P	P/P-12	P/P-12	P-12	P-12	-	P-29	P	P	P
	General Office	P	P	P	-	-	-	P-29	P	P	P
	Accessory Office	P	-	-	-	-	-	P-29	P	P	P
Civic	Public Facilities	P	-	-	P-30	-	P	P-29	P	P	P
	Recreation and Cultural Facilities, Public and Private	P	-	-	P	-	P	P-29	P	P	P
	Place of Worship	P	P-21	P-21	P	-	P-33	P-29	-	-	-
	Solar Panels or Arrays	P	P	P	P	P	P-22	P-29	P	P	P
Other	Vineyards and Other Agricultural Uses	-	-	-	-	P-23	P	P-29	P-24	-	-
	Telecommunications Facilities	P-25	-	-	-	-	P-32	P-29	-	P-32	P-32
	Parking lots	P	P	P	-	-	P-33	P-29	P	P	P
	Drive-through Window Service	P-26	P/P-26	P/P-26	-	-	-	P-29	P-26	P-26	P-26
	Vending Carts	P-27	-	-	-	-	-	P-29	P-27	P-27	P-27
	Temporary Uses	P-28	-	-	-	-	-	P-29	P-28	P-28	P-28
	Special Events	P	-	-	-	-	P	P-29	P	P	P
	Gambling Premises	-	-	-	-	-	-	P-29	-	-	P

2.C LAND USE TABLE

The Land Use Table categorizes the range of uses or functions which may occupy a building in each of the Districts. The Districts are identified by name and by color-coded legend across the top bar of the table and the uses are identified in the column on the left of the table. These functional classifications are defined and examples are provided in Section 14, the Glossary.

The functional classifications or uses are identified for each District as “P”, permitted by right, or “P-Number” which refers to the numbered Notes Table 2.C.1 below for additional information, restrictions or exclusions. If there is neither reference, the use is not permitted within that District.

The City’s Administrative Official may allow a use that is unlisted in the Land Use Table ~~if all conditions of LUDR 1.G.3 apply.~~ pursuant to

 Indicates -P Overlay District - see 2.B, Regulating Plan for Land Use and Urban Form for specific locations.

The BMS-NC-P column is updated to show the allowed uses in BMS-NC as the -P overlay does not reserve space for storage (differentiated from the BMC-CIVIC-P overlay - see note P-29)

2.C.1 LAND USE TABLE NOTES

- Multi-family housing includes the following Building Types – Live/Work; Commercial/ Mixed-Use/Liner over commercial or office; Stacked Units; Row Houses.
 - Alley-access, Single-family Building Type is permitted.
- Multi-family housing includes the following Building Types – Duplex; Mansion Apartment; Courtyard Housing; Row House; Live/Work; Commercial/Mixed-Use/Liner and Stacked Units.
- Multi-family housing includes: Duplex - up to two per Block face, Courtyard Housing, and Mansion Apartments limited to block ends across from open space.
- Multi-family housing includes the following Building Types – Live/work; Row house; Commercial/Mixed-use/Liner over commercial and Stacked Units
- Unused
- Senior Housing permitted above ground floor commercial or office, or when constructed in a multi-story building.
- Assisted Living/Nursing Homes permitted on corner lots at intersection of two Arterial Collector Streets.
- One Accessory Unit, not to exceed 600 sq. ft., per lot is permitted either within the principal structure or an accessory structure. Other provisions of RMC 23.42.020 apply.
- Unused
- When one part of a larger office-retail development.
- When food or winery-related.
- Permitted when operated as a Home Occupation without any occupational vehicles associated with the Home Occupation, and as otherwise defined and regulated in RMC 23.42.090.

- When totally enclosed within a building or in a Liner Building Type.
- For areas other than those across the street from the BMS-VMU District: Eating establishments located in buildings on a corner lot of two Collector Streets, or within a larger building as an ancillary use; not more than one per block; May seat 20 and fewer patrons, not operate between 11 p.m. and 6 a.m., and not sell alcoholic beverages.
- When licensed as a Child Care Center and meets RMC 23.42.080(A-D, F) requirements. In the BMS-NC District, must be located on corner lots.
- When licensed for Family Home Child Care only and meets other requirements of RMC 23.42.080 (A-D, F) requirements.
- Within the East Market BMS-VMU District when located on an Arterial Collector Street; may include a convenience store as an incidental use. Subject to standards for Neighborhood Goods and Services Building Type, otherwise meet RMC 23.42.270 or 23.42.280 requirements.
- Subject to standards for Neighborhood Goods and Services Building Type, otherwise meet RMC 23.42.270 or 23.42.280 requirements.
- In the BMS-NG District only one neighborhood storage area up to 1 acre in size for boats, vehicles and/or recreational vehicles shall be permitted within each of the five residential neighborhoods; no storage of junk, materials or other items permitted. Subject to landscape screening standards found in Sec.11.C.8 and fencing standards found in Section 13.A.3. Storage area larger than 1 acre in size for boats, vehicles and/ or recreational vehicles permitted in BMS-NC-P Overlay District subject to standards in Sec. 3.C.
- A Bed and Breakfast facility providing a maximum of four rental rooms and subject to the provisions of RMC 23.42.045 (A)-(D).

- Maximum lot size of 6 acres.
- Solar panels, or arrays, which serve individual residences or buildings, are permitted accessory uses in all zones. A grouping of multiple solar panels to serve multiple users may be placed within the BMS-Civic Districts, subject to Administrative review that: the size and dimension of the site is adequate; they do not interfere with planned or sited public amenities; and any identified impacts to adjacent properties have been adequately mitigated.
- Vineyards are considered landscape materials in residential Districts when planted by the homeowner for personal use.
- Vineyards including wine making facilities, enclosed storage and related production.
- Micro facilities and Macro facilities permitted as defined and regulated in RMC 23.62.
- Must meet additional requirements of RMC 23.42.047 and any unique master site plan.
- Subject to standards found in RMC 5.14.
- When ancillary and seasonal to primary retail.
- BMS-Civic-P Overlay District: Use restricted to school site until such time as restrictions on land use set forth in the BMS-Master Agreement are removed. At that time, all of the uses that are marked with the P-29 footnote are permitted, subject to any further conditions imposed by other applicable footnotes.
- ~~Block Parks,~~ Local Parks and Greenbelts are allowed to be constructed in the BMS-NG District.
- Unused
- When accessory to an adjacent use and subject to Section 11.C standards.
- When co-developed with another facility.

SEE FOLLOWING PAGE FOR
PROPOSED CHANGES.

2.D BUILDING TYPE TABLE

Each District in Badger Mountain South regulates what can happen on the land by how it is to be used and also by Building Types. The table on the right shows which Building Types are allowed in each District and offers illustrative examples of the Building Types in 2.E below.

Each building in the Badger Mountain South community, with the exception of developments in the Special Districts, shall be one of the Building Types listed here. The Special Districts included in Section 4 are regulated by use and intent rather than by Building Type.

Other than Special Districts, each Building Type must meet the standards for the District it is located in as described in Section 3, Urban Form Standards by District, as well as the standards as described in Section 8, Building Type Standards.

Process: What do you want to build and how can it be built?

Step 1: Use the Building Type Table, 2.D, to identify the types of buildings that are allowed to be built in each District. The color-coded legend refers to the Districts as identified in 2.B Regulating Plan for Land Use and Urban Form.

Step 2: The Building Type examples in 2.E below illustrate one style of the possible Building Types allowed.

Step 3: See Urban Form Standards by District, Section 3, for standards that apply to all buildings except those in the SD Special Districts. See Section 4 for Special District Standards.

Step 4: See Building Type Standards, Section 8, for standards that apply to particular types of buildings.

Step 5: See additional Standards for Landscaping, Sustainability and Site Improvements, Sections 11-13.

X = Allowed Building Type
-P = Allowed Building Type only in -P Overlay District, if Land Use conditions are met.

2.E BUILDING TYPE EXAMPLES

	BUILDING TYPES ALLOWED BY DISTRICT							
	BMS-VMU	BMS-NC	BMS-NG	BMS-NE	BMS-CIVIC	BMS SD-SR	BMS SD-CMU	BMS SD-DR
BUILDING TYPE								
1. Civic/Community/Institutional Facilities (8.D)	X	X	X		X	Note: Special Districts are not regulated by Building Type. See Section 4 for District intent and standards. See also 8.C for Common Design Standards applicable to all Districts.		
2. Neighborhood Goods & Services Buildings (8.E)	X	X						
3. Commercial / Mixed-Use / Liner (8.F)	X	X						
4. Live/Work Building (8.G)	X	X						
5. Stacked Unit Building (Apartment) (8.H)	X	X						
6. Row House (8.I)	X	X						
7. Courtyard Housing (8.J)		X	X		-P			
8. Mansion Apartment (3 - 6 Plex) (8.K)		X	X		-P			
9. Paired House (Duplex) (8.L)		X	X		-P			
10. Cottage Court (8.M)		X	X		-P			
11A. Single Family House - Alley Access Garage (8.N)		X	X	X	-P			
11B. Single Family House - Street Access Garage (8.O)			X	X	-P			
12. Accessory Unit (8.P)		X	X	X	-P			



1. Civic/Community/Institutional



2. Neighborhood Goods & Services



3. Commercial / Mixed-Use / Liner



4. Live/Work Building



5. Stacked Unit Building (Apartment)



6. Row House



7. Courtyard Housing



8. Mansion Apartment



9. Paired House (Duplex)



10. Cottage Court



11. Single Family House



12. Accessory Unit

PROPOSED AMENDMENTS ARE SHOWN (no substantive changes are made, this is just cleaning up the document):

2.D BUILDING TYPE TABLE

Each District in Badger Mountain South regulates what can happen on the land by how it is to be used and also by Building Types. The table to the right shows which Building Types are allowed in each District and offers illustrative examples of the Building Types in 2.E below.

Each building in the Badger Mountain South community, with the exception of development in the Special Districts, shall be one of the Building Types listed here. The Special Districts included in Section 4 are regulated by use and intent rather than by Building Type.

Other than Special Districts, each Building Type must meet the standards for the District it is located in as described in Section 3, Urban Form Standards by District, as well as the standards as described in Section 8, Building Type Standards.

Process: What do you want to build and how can it be built?

Step 1: Use the Building Type Table, 2.D, to identify the types of buildings that are allowed to be built in each District. The color-coded legend refers to the Districts as identified in 2.B Regulating Plan for Land Use and Urban Form.

Step 2: The Building Type examples in 2.E below illustrate one style of the possible Building Types allowed.

Step 3: See Urban Form Standards by District, Section 3, for standards that apply to all buildings except those in the SD Special Districts. See Section 4 for Special District Standards.

Step 4: See Building Type Standards, Section 8, for standards that apply to particular types of buildings.

Step 5: See additional Standards for Landscaping, Sustainability and Site Improvements, Sections ~~11-13.~~ **11 through 13.**

A ~~X~~ = Allowed Building Type
-P = Allowed Building Type only in -P Overlay District, if Land Use conditions are met.

	BUILDING TYPES ALLOWED BY DISTRICT							
	BMS-VMU	BMS-NC	BMS-NG	BMS-NE	BMS-CIVIC	BMS SD-SR	BMS SD-CMU	BMS SD-DR
BUILDING TYPE								
Civic/Community/Institutional Facilities (8.D)	A	A	A		A	Note: Special Districts are not regulated by Building Type. See Section 4 for District intent and standards. See also 8.C for Common Design Standards applicable to all Districts. Commercial Districts and Projects		
Neighborhood Goods & Services Buildings (8.E)								
Commercial / Mixed-Use / Liner (8.F)								
Live/Work Building (8.G)	A	A						
Stacked Unit Building (Apartment) (8.H)								
Row House (8.I)								
Courtyard Housing (8.J)								
Mansion Apartment (3 - 6 Plex) (8.K)		A	A		-P			
Paired House (Duplex) (8.L)								
Cottage Court (8.M)								
Single Family House Alley Access Garage (8.N) (8.N or 8.O) and Accessory Units (8.P)		A	A	A	-P			

2.E BUILDING TYPE EXAMPLES



Civic/Community/Institutional (8D)



Neighborhood Goods & Services (8E)



Commercial / Mixed-Use / Liner (8F)



Live/Work Building (8G)



Stacked Unit Building (Apartment) (8H)



Row House (8I)



Courtyard Housing (8J)



Mansion Apartment (8K)



Paired House (Duplex) (8L)



Cottage Court (8M)



Single Family House (8N/O)



Accessory Unit (8P)



**URBAN FORM
STANDARDS FOR
DISTRICTS
OTHER THAN SPECIAL DISTRICTS**

3

Section 3 identifies the Urban Form Standards for Districts within the Badger Mountain South community other than Special Districts. ~~(which are included in Section 4)~~

3.A Introduction - Urban Form Standards for Districts.....3-2
3.B BMS Village Mixed-Use District (BMS-VMU).....3-3
3.C BMS Neighborhood Collector District (BMS-NC).....3-4 ~~to 3-5~~
3.D BMS Neighborhood General District (BMS-NG).....3-6
3.E BMS Neighborhood Edge District (BMS-NE).....3-7
3.F BMS Civic District (BMS-CIVIC).....3-8

3.A INTRODUCTION - URBAN FORM STANDARDS FOR DISTRICTS

The Urban Form Standards for Districts section identifies the District development standards for five of the Districts in Badger Mountain South. Not included here are the standards for the three Special Districts which are found in Section 4.

The Urban Form Standards for Districts are established to provide the Badger Mountain South community with distinctive neighborhoods as reflected by the physical form of the built environment. They are differentiated by type of buildings permitted, building height, intensity and use. As such, these standards “set the table” in each District for the buildings to be constructed there.

The Urban Form Standards for Districts are used in addition to the Building Type Standards found in Section 8. Since the District standards found here are of primary importance in establishing the character and quality of the neighborhoods, they supersede the Building Type Standards when in conflict.

The Urban Form Standards for Districts section identifies specific descriptions for each of the following:

- 1. District Intent
- 2. Building Placement
- 3. Building Profile and Type
 - a. Building Height
 - b. Allowed Building Types
 - c. Allowed Frontage Types
- 4. Parking

Exceptions
In some cases, it may be necessary to relax specific standards for residential development, including but not limited to setbacks and build-to lines, to address unusual site characteristics such as topography, non-rectangular lots, or lots fronting cul-de-sacs. Such deviations may be considered during the platting process; notes shall be included on the face of the recorded plat which will supersede the LUDR for the specified standard only.


URBAN FORM DISTRICT SUMMARY				
BMS-VMU (3.B)	(3.C.A and 3.C.B) BMS-NC (3.C)	BMS-NG (3.D)	BMS-NE (3.E)	BMS-CIVIC (3.F)
There is a Village Mixed-Use District in Badger Mountain South. It is designed to contain a variety of Neighborhood Commercial uses, and residential uses in Mixed-Use, Live/Work, Stacked Units and Row House buildings.	The Neighborhood Collector District is designed to permit a variety of housing options and neighborhood-scale commercial Mixed-Uses.	The Neighborhood General District allows primarily Single-family detached homes in a variety of configurations. Also permitted are smaller-scaled Multi-family Building Types.	The Neighborhood Edge District permits detached Single-family residences and related uses that are compatible and common to Single-family houses.	The Civic Districts are the areas where schools, parks, trails, open space and other public and community facilities are located.
				



Illustrative Photo: Mixed-Use Streetscape

1. VILLAGE MIXED-USE DISTRICT / COMMERCIAL AND MULTI-FAMILY ONLY INTENT


The Village Mixed-Use District is located in the Badger Mountain South community located along the primary Arterial Collector Streets running east-west and north-south. The intent of this District is to create an active, economically vital, pedestrian-oriented environment where people can shop, work, play and live. Urban Building Types line the blocks providing a variety of ground floor retail, commercial, office uses and upper levels of Multi-family housing, as well as Live/Work, Stacked Units and Row House housing options.

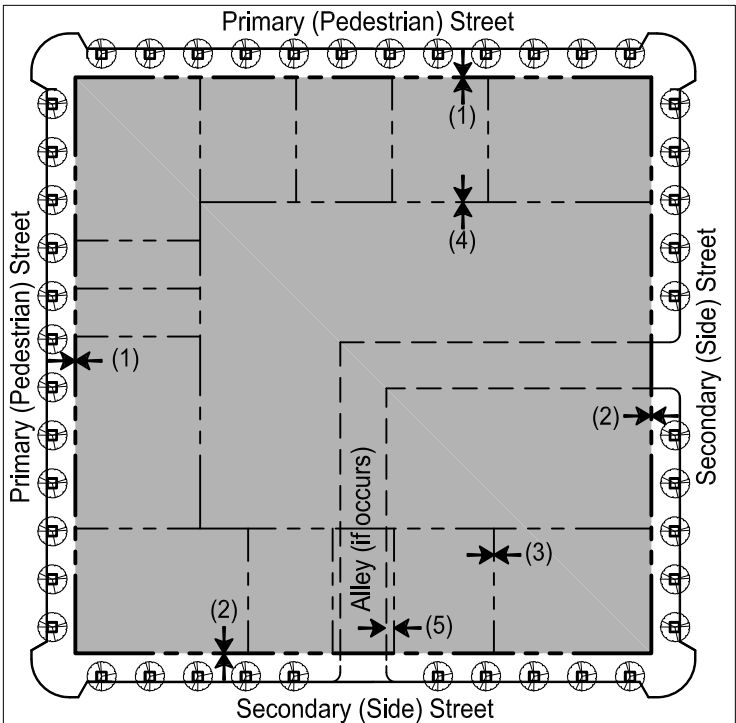

Building Placement Diagram (Plan View)

2. BUILDING PLACEMENT


- a. Setbacks** (as measured from the property line)
- Buildings shall be placed within the shaded area as shown in the building placement diagram.
- | | |
|---------------------------------|---------|
| (1) Front Build-to-Line: | 0 ft. |
| (2) Side Street Setback: | 0 ft. |
| (3) Side Yard Setback: | 0 ft. |
| (4) Rear Setback: | 0 ft. |
| (5) Alley Setback (if provided) | 4 ft. * |
- * Alley setback shall be measured from edge of Alley easement.
- b. Percentage of Building Facade at Build-to-Line**
- (1) Doors along the building facade are allowed to be recessed in alcoves and are not included in percentage calculation.
 - (2) The face of structure supporting the allowed Frontage Type, shall be considered as the building facade for Build-to-Line percentage calculations.
 - (3) Corner conditions as described in 8.C.5 are excluded from the percentage BTL requirement.
- c. Encroachments**
- Encroachments are allowed subject to the following criteria:
- (1) The following architectural elements are allowed to encroach into required setbacks and/or Public Right of Way (R.O.W.): awnings, galleries, balconies, bay windows, signs, cornices, eaves and similar projected elements.
 - (2) Stairs, ramps and handrails are allowed to encroach into required setbacks only.
 - (3) Overhead encroachments shall have a minimum height clearance of 8 ft.
 - (4) A City of Richland license must be obtained for encroachments that occur over sidewalks or City airspace. Requester of encroachment to demonstrate how the requirements of RMC 5.14.050 to the Administrative Official. No hearing shall be required as part of this application.

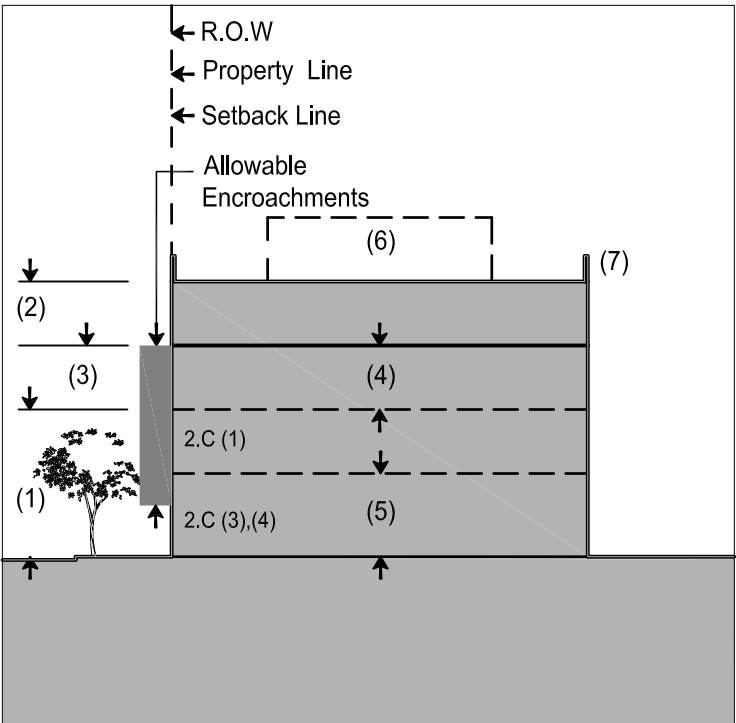

Building Profile Diagram (Section View)

3. BUILDING PROFILE AND TYPE

- a. Building Height/Stories**
- (1) Minimum Height: 24' as measured by RMC
 - (2) Maximum Height: 50' as measured by RMC
 - (3) The maximum height shall be reduced to 3 Stories in the following conditions:
 - i. Buildings adjacent to outdoor Civic Spaces, such as Plazas, where solar access would be reduced.
 - (4) If ground floor commercial space is provided, the ground floor ceiling shall be a minimum of 12 ft. clear height, as measured from finished floor slab to underside of finished ceiling.
 - (5) For flat roofs, rooftop equipment may exceed the height limit by 10 ft., provided it is located no closer than 15 ft. to edge of exterior wall, otherwise equipment shall be concealed.
 - (6) For flat roofs, a parapet is allowed to extend above the maximum height limit by 4 ft.
- b. Allowed Building Types**
- Refer to Section 8 for Building Type standards.
- | | |
|---|-------|
| (1) Civic/Community/Institutional Facilities | (8.D) |
| (2) Neighborhood Goods and Services Building | (8.E) |
| (3) Commercial / Mixed-Use / Liner | (8.F) |
| (4) Live / Work Building | (8.G) |
| (5) Stacked Unit Building (on Secondary Streets only) | (8.H) |
| (6) Row House (on Secondary streets only) | (8.I) |
- c. Allowed Frontage Types**
- Refer to Section 9 for Frontage Type standards. Frontage allowed here by District standards shall also be regulated per the Building Type standards in Section 8.
- | | |
|------------------------------|-------|
| (1) Storefront | (9.B) |
| (2) Arcade | (9.C) |
| (3) Gallery | (9.D) |
| (4) Forecourt | (9.E) |
| (5) Porch (Residential only) | (9.G) |
| (6) Stoop (Residential only) | (9.H) |
| (7) Greenbelt | (9.F) |

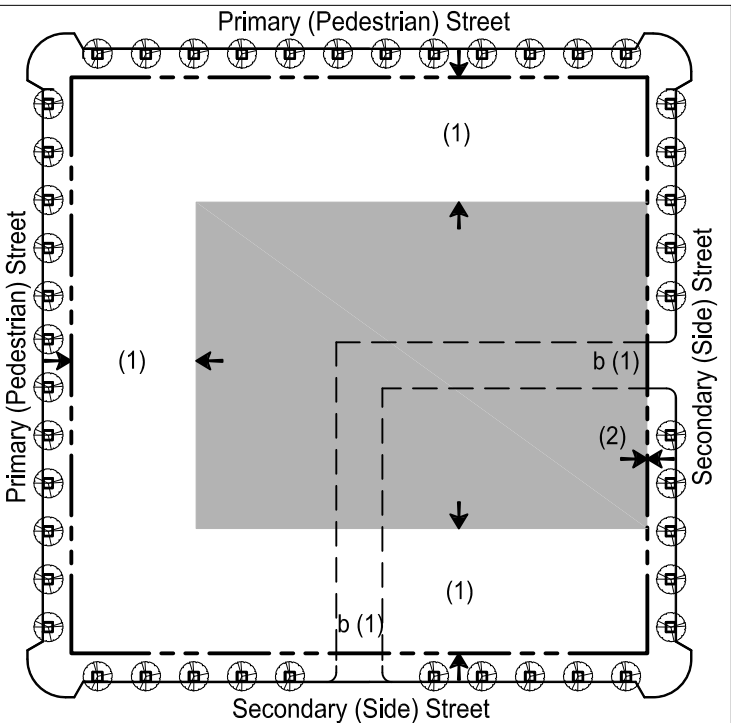

Parking Placement Diagram (Plan View)

4. PARKING

- a. Parking Placement**
- On grade parking (enclosed or unenclosed) is allowed only in the shaded area as shown in the parking placement diagram.
- (1) On-site parking shall be placed behind the building and screened from view from the Primary (Pedestrian) Streets. Parking lots may only be open (i.e. not behind a building) on one Secondary Street frontage.
 - (2) Surface parking shall be screened from Secondary (Side) Streets by landscaping per 11.C.7.c. or by fencing with landscaping. See section 13.A.2 for fencing standards.
- b. Parking Access**
- (1) Primary (Pedestrian) Streets shall be uninterrupted by vehicles to the maximum extent possible. Parking shall be accessed only from Secondary Streets or from Alleys accessed from Secondary Streets.
- c. Minimum Parking Quantity Requirements**
- (1) Commercial Parking Requirements:
 - i. 1 space per 1000 SF of building area
 - (2) Live/Work Parking Requirements:
 - i. <2,500 SF = 1 space per 1,500 SF of bldg. area
 - ii. =>2,500 SF = 1 space per 1,000 SF of bldg. area
 - (3) Residential Parking Requirements:
 - i. 1 space per unit
 - ii. 1 space per 2 units is required for Affordable or Senior Housing units.
 - (4) On-street parking can be used in parking calculation using criteria outlined in RMC 23.54.
- d. Miscellaneous**
- (1) See Section 13.D for Common Parking Standards.
 - (2) Parking and aisle dimensions per City of Richland standards - see RMC 23.54.
 - (3) Maximum of 20% of required parking may be compact stalls at a dimension of 8' x 16'.




Illustrative Photo: Neighborhood Mixed-Use and Live/Work Units

1. NEIGHBORHOOD COLLECTOR DISTRICT INTENT

The Neighborhood Collector (BMC-NC) District is found within each of the five residential neighborhoods that comprise Badger Mountain South. These Districts add diversity to the housing found in Badger Mountain South, complement future transit expansion and provide opportunities to establish intergenerational neighborhoods. They are located primarily along Collector Streets and at the primary entrances to the neighborhoods as shown on the Regulating Plan in Section 2.B.

The Neighborhood Collector District is primarily residential that provides a variety of housing. Mixed-Use and Live/Work Buildings in this District provide the flexibility for these areas to accommodate neighborhood-scale commercial uses that respond to the evolving needs of the community as it grows. Stand-alone, smaller-scale Neighborhood Goods and Services Buildings that serve the needs of the residents, such as churches and day cares, are encouraged in this District.


Section 3.C.A provides Urban Form Standards for Commercial and Multi-family uses in the BMS-NC District. Section 3.C.B provides Urban Form Standards for Single Family Residential uses in the BMS-NC District.

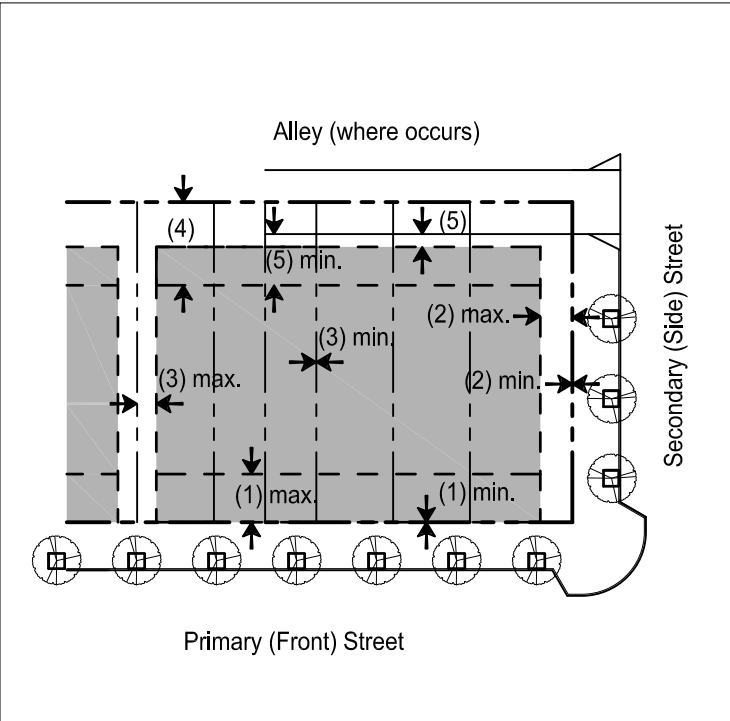

Building Placement Diagram (Plan View)

2. BUILDING PLACEMENT


- a. **Setbacks** (as measured from the property line)
Buildings shall be placed within the shaded area as shown in the building placement diagram. Parking garages shall be placed per item 4a. Parking Placement.
- (1) Front Build-to-Line: i. Ground floor commercial: 0 ft. ii. Ground floor residential: 10 ft.
 - (2) Side Street Setback: i. Ground floor commercial: 0 ft. ii. Ground floor residential: 10 ft.
 - (3) Side Yard Setback: 0 ft. min.
 - (4) Rear Setback (w/o Alley): 15 ft. min.
 - (5) Alley Setback: 4 ft. OR 16 ft. min.*
* Alley setback is measured from edge of Alley easement. To ensure that parking locations off Alley are adequate, buildings shall either be placed at 4 ft. (no parking) OR 16 ft. (parking).
- b. **Percentage of Building Facade at Build-to-Line:**
- (1) Primary Street: 60% min.
 - (2) Secondary Street or Civic Space: 60% min.
 - (3) Doors along the building facade are allowed to be recessed in alcoves.
 - (4) The face of structure supporting the allowed Frontage Type, shall be considered as the building facade for build to line percentage calculations.
 - (5) Corner conditions as described in 8.C.5 are excluded from the percentage BTL requirement.
- c. **Encroachments**
Encroachments are allowed subject to the following criteria:
- (1) The following architectural elements are allowed to encroach into required setbacks and/or Public Right of Way (ROW): awnings, galleries, balconies, bay windows, signs, cornices, eaves and similar projected elements.
 - (2) Stairs, ramps and handrails are allowed to encroach into required setbacks only.
 - (3) Overhead encroachments shall have a minimum height clearance of 8 ft.
 - (4) A City of Richland license must be obtained for encroachments that occur over sidewalks or City airspace. Requester of encroachment to demonstrate how the requirements of RMC 5.14.050 to the Administrative Official. No hearing shall be required as part of this application.

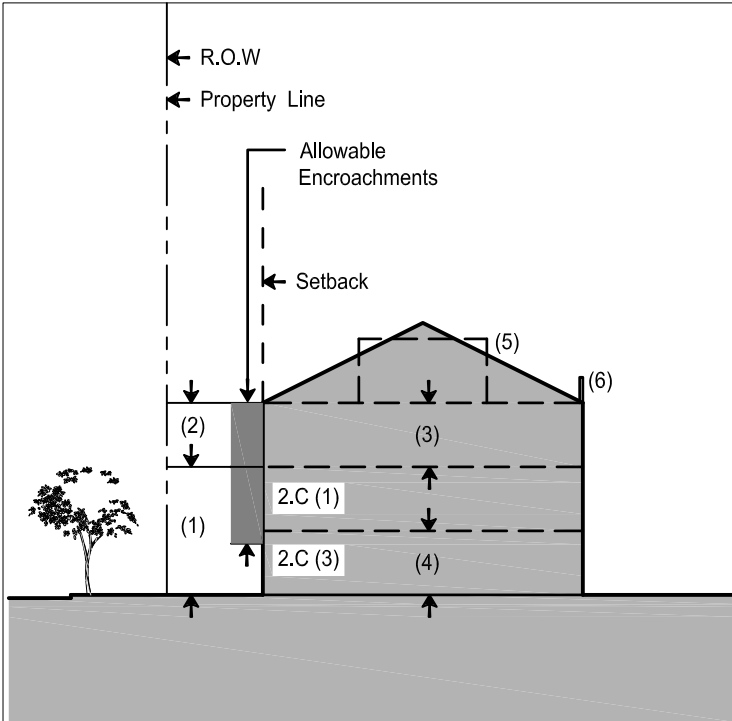

Building Profile Diagram (Section View)

3. BUILDING PROFILE AND TYPE

- a. **Building Height/Stories**
- (1) Maximum Height: 35 ft. as ~~defined in~~ ^{measured} RMC.
 - (2) If ground floor commercial space is provided, the ground floor ceiling shall be a min. of 10 ft. clear height as measured from finished floor slab to underside of finished ceiling.
 - (3) For flat roofs, rooftop equipment may exceed the height limit by 10 ft., provided it is located no closer than 15 ft. to edge of exterior wall, otherwise equipment shall be concealed within the attic space.
 - (4) For flat roofs, a parapet is allowed to extend above the maximum height limit by 4 ft.
- b. **Allowed Building Types**
Refer to Section 8 for Building Type standards.
- | | |
|--|-------|
| (1) Civic/Community/Institutional Facilities | (8.D) |
| (2) Neighborhood Goods and Services Building | (8.E) |
| (3) Commercial / Mixed-Use / Liner Building | (8.F) |
| (4) Live / Work Building | (8.G) |
| (5) Stacked Unit Building (Apartment) | (8.H) |
| (6) Row House | (8.I) |
| (7) Courtyard Housing | (8.J) |
| (8) Mansion Apartment | (8.K) |
| (9) Paired House (Duplex) | (8.L) |
- c. **Allowed Frontage Types**
Refer to Section 9 for Frontage Type standards. Frontage allowed here by District standards shall also be regulated per the Building Type standards in Section 8.
- | | |
|----------------------------------|-------|
| (1) Storefront (commercial only) | (9.B) |
| (2) Gallery | (9.D) |
| (3) Arcade | (9.C) |
| (4) Forecourt | (9.E) |
| (5) Porch | (9.G) |
| (6) Stoop | (9.H) |
| (7) Greenbelt | (9.F) |

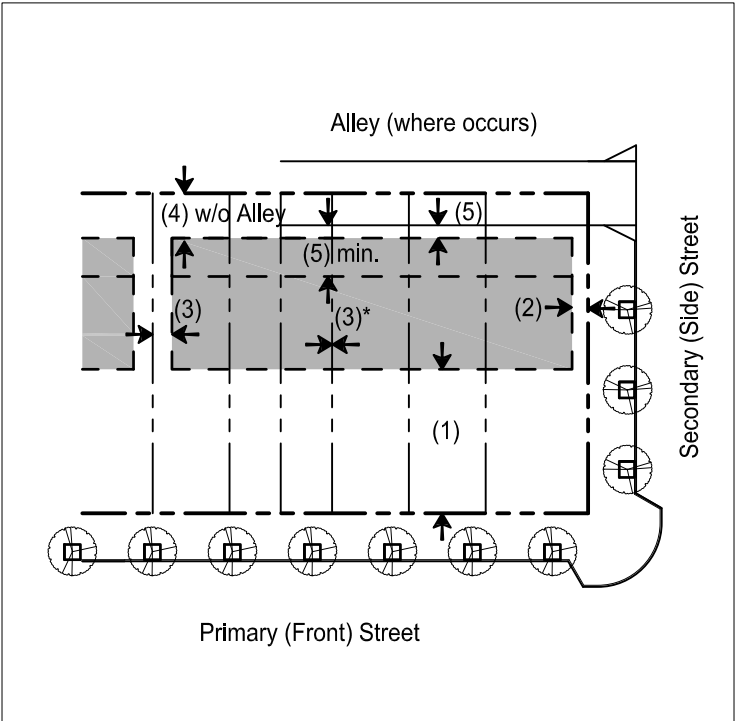

Parking Placement Diagram (Plan View)

4. PARKING

- a. **Parking Placement**
On grade parking (enclosed or unenclosed) is allowed only in the shaded area as shown in the parking placement diagram.
- (1) Front setback: 50% lot depth
 - (2) Side street setback: 5 ft. min.
 - (3) Side yard Setback: 0 ft. min.*, or 6 ft. min.
* Requires 10 ft. min. separation to building on adjacent parcel or zero lot line /partywall condition.
 - (4) Rear Setback: 15 ft. min.
 - (5) Alley Setback: 4ft. OR 16 ft. min.
- b. **Parking Access**
- (1) Parking shall be accessed from rear Alleys.
 - (2) For commercial building sites without Alleys, parking shall be accessed from a Secondary Street.
- c. **Minimum Parking Requirements**
- (1) Commercial Parking Requirements:
 - i. 1 space per 1000 SF of bldg. area.
 - (2) Live/Work Parking Requirements:
 - i. <2,500 SF = 1 space per 1,500 SF of bldg. area.
 - ii. =>2,500 SF = 1 space per 1,000 SF of bldg. area.
 - (3) Minimum Residential Parking Requirements:
 - i. 1 space per unit.
 - ii. Minimum 1 space per 2 units provided for Affordable or Senior Housing units.
 - iii. Outside parking/storage of boats and recreational vehicles is only permitted within a garage or other permitted accessory structure, or designated Neighborhood or Community Storage Areas.
- d. **Miscellaneous**
- (1) For multi-family and commercial development, see Section 13.D for Common Parking Standards.
 - (2) Parking and aisle dimensions per City of Richland standards - see RMC 23.54.
 - (3) Maximum of 20% of required parking may be compact stalls at a dimension of 8' x 16'.




Illustrative Photo: Single-Family Houses and Local Park

1. NEIGHBORHOOD COLLECTOR DISTRICT / SINGLE FAMILY ONLY INTENT

This Section provides Urban Form Standards for Single Family Residential uses in the BMS-NC District. Section 3.C.A provides Urban Form Standards for Commercial and Multi-family uses in the BMS-NC District.

- (4) Appurtenant Structures are allowed subject to the following:
- a. Appurtenant structures related to residential uses such as small sheds (<336 sq. ft), covered patios, attached pergolas and free-standing pergolas are permitted, subject to recorded covenants, conditions, and restrictions.
 - b. Appurtenant structures which are attached to a building shall meet the main building setbacks and shall comply with all site requirements including maximum building height and maximum lot coverage.
 - c. Detached appurtenant structures in BMS-NC, see RMC 23.38.020

*** Unless alternative standards are recorded on a plat (i.e. additional space could be needed for lots on cul-de-sacs)

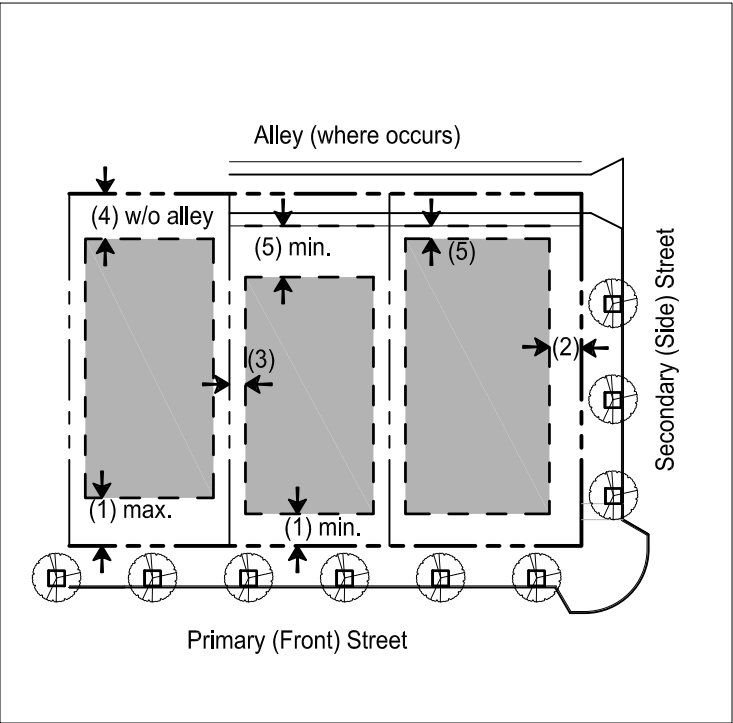

Building Placement Diagram (Plan View)

2. BUILDING PLACEMENT


- a. **Setbacks** (as measured from the property line)
- Buildings shall be placed within the shaded area as shown in the building placement diagram.
- | | | |
|--------------------------|-----|--------------------------|
| (1) Front Build-to-Line: | *** | 10 ft. min.; 20 ft. max. |
| (2) Side Street Setback: | | 10 ft. min. |
| (3) Side yard Setback: | | 5 ft. min. ** |
| (4) Rear Setback: | | 15 ft. min. |
| (5) Alley Setback: | | 4 ft. OR 16 ft. min.* |

* Alley setback is measured from edge of Alley easement. To ensure that parking locations off Alley are adequate, buildings shall either be placed at 4 ft. (no parking) OR 16 ft. min. (parking).

** Structures may be built with no setback on one side: (i) when having a shared common wall at the property line with each structure on an adjacent lot under separate fee ownership; and (ii) when multiple, successive structures on a block face are each placed on the lot with no setback on one side; in this case the other Sideyard setback will be 12 ft. min.

- b. **Min. Percentage of Building Facade at Build-to-Line:**
- | | |
|--------------------------------------|------|
| (1) Primary Street: | None |
| (2) Secondary Street or Civic Space: | None |

- c. **Encroachments**
- Encroachments are allowed subject to the following criteria:
- (1) The following architectural elements are allowed to encroach into required setbacks: awnings, balconies, bay windows, cornices, eaves and similar projected elements, stairs, ramps and handrails.
 - (2) Overhead encroachments shall have a minimum height clearance of 8 ft.

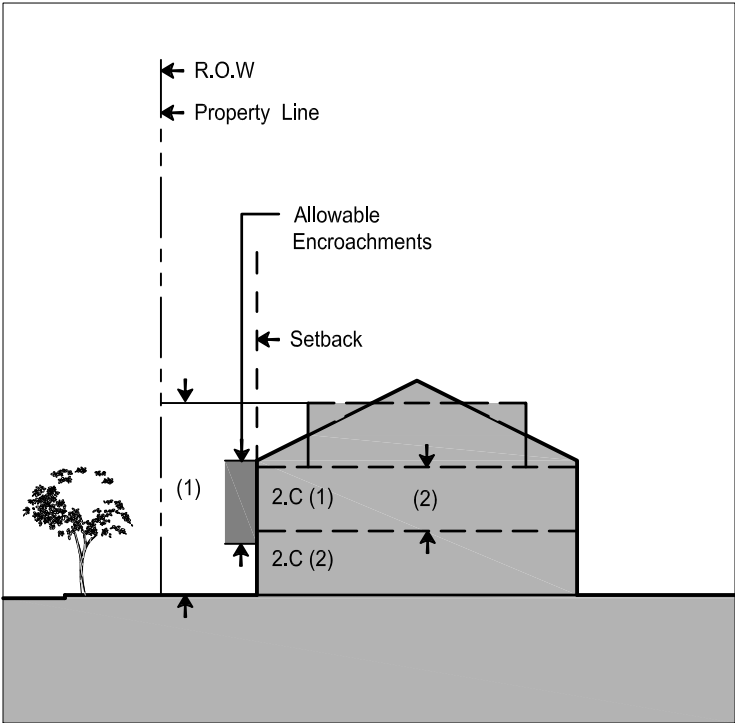


Building Profile Diagram (Section View)

3. BUILDING PROFILE AND TYPE

- a. **Building Height/Stories**
- (1) Maximum Height: 35 ft. as ~~defined~~ ^{measured} in RMC.
- b. **Allowed Building Types**
- Refer to Section 8 for Building Type standards.
- | | |
|---|-------|
| (1) Single-Family House - Alley Access | (8.N) |
| (2) Single-Family House - Street Access | (8.O) |
| (3) Accessory Unit | (8.P) |
- ~~*Only when located in a Local Park~~
- c. **Allowed Frontage Types**
- Refer to Section 9 for Frontage Type standards. Frontage allowed here by District standards shall also be regulated per the Building Type standards in Section 8.
- | | |
|---------------|-------|
| (1) Forecourt | (9.E) |
| (2) Greenbelt | (9.F) |
| (3) Porch | (9.G) |
| (4) Stoop | (9.H) |

4. PARKING

- a. **Parking Access**
- (1) Parking shall be accessed from rear Alleys, if provided.
- (2) Parking access from street must meet Block Standards set forth in Section ~~7.C~~ ^{7.B} and Building Type standards in Section 8.O Single-Family House-Street Access.

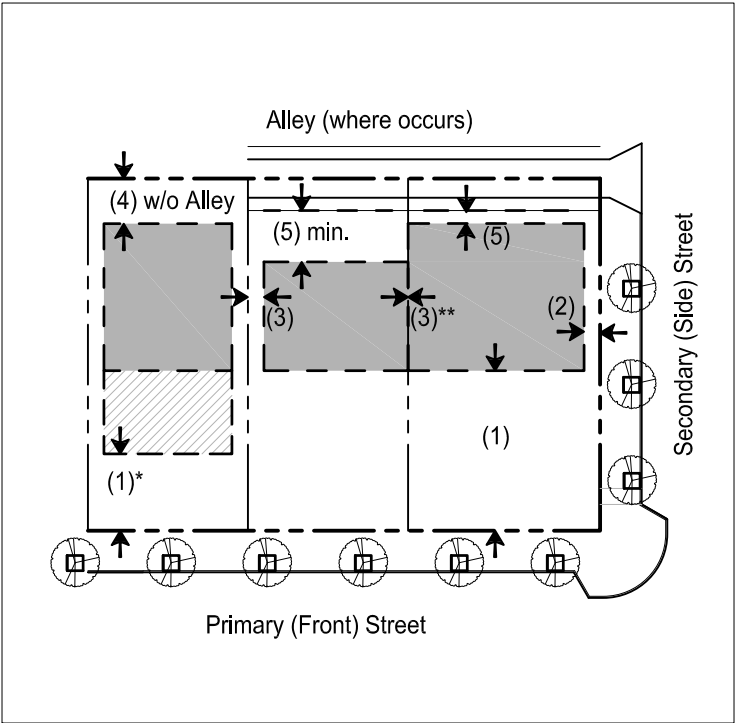

Parking Placement Diagram (Plan View)

b. ~~c.~~ **Parking Requirements**

- (1) Residential Parking Requirements:
- i. 1 space per unit minimum.
 - ii. 1 space per 2 units minimum is required for Affordable or Senior Housing units.
- (2) Maximum 3 car garage door frontage on front load lots. On alley access lots, and front load lots developed with side-yard garage, or when developed with one garage bay recessed a minimum 8 ft. from the other garage bays and the house has a front porch of at least 80 sq. ft., 3 car garage door frontages are permitted.
- (3) Outside parking or storage of boats and recreational vehicles is only permitted within a garage or other permitted accessory structure, or within designated Neighborhood or Community Storage Areas.
- (4) The driveway width within the right of way (ROW) shall not exceed of 50% of the primary street frontage or a maximum width of 35 feet on any single family lot to ensure that on street parking within the development. Driveways may flare out once outside the ROW or access tract.

c. ~~d.~~ **Miscellaneous**

- (1) For multi-family and commercial development, see Section 13.D for Common Parking Standards.
- (2) Parking and aisle dimensions per City of Richland standards - see RMC 23.54.
- (3) For street access lots with rear yards facing a collector street, a five-foot minimum landscape tract shall be located between the rear property line and the collector street. The block length shall be a minimum of 300 feet. The tract shall be planted per 11.C.7.c. See Building Placement Diagram (rear yard facing collector street).



Illustrative Photo: Single-Family Houses and Local Park

1. NEIGHBORHOOD GENERAL DISTRICT INTENT

The Neighborhood General (BMC-NG) District comprises the majority the Badger Mountain South community. This District is primarily residential in character. A variety of housing options are provided to meet the needs of the community. The residents of these Districts are within walking distance of schools, parks, trails and commercial centers supporting the vision of the community.

Single-family houses are accommodated on a variety of lot sizes allowing a range of housing options from cottages to large detached structures. Smaller-scale Multi-family housing options such as Mansion Apartments, Duplexes and Courtyard Housing, are also accommodated when certain siting conditions are met.

Additional housing units are permitted in this District through the use of Accessory Units.


*** Unless alternative standards are recorded on a plat (i.e. additional space could be needed for lots on cul-de-sacs)

2. BUILDING PLACEMENT

- a. Setbacks** (as measured from the property line)
- Buildings shall be placed within the shaded area as shown in the building placement diagram.
- | | |
|-----------------------------|--------------------------|
| (1) Front Build-to-Line:*** | 10 ft. min.; 20 ft. max. |
| (2) Side Street Setback: | 10 ft. min. |
| (3) Side yard Setback: | 5 ft. min. ** |
| (4) Rear Setback: | 15 ft. min. |
| (5) Alley Setback: | 4 ft. OR 16 ft. min.* |
- * Alley setback is measured from edge of Alley easement. To ensure that parking locations off Alley are adequate, buildings shall either be placed at 4 ft. (no parking) OR 16 ft. min. (parking).
- ** Structures may be built with no setback on one side: (i) when having a shared common wall at the property line with each structure on an adjacent lot under separate fee ownership; and (ii) when multiple, successive structures on a block face are each placed on the lot with no setback on one side; in this case the other Sideyard setback will be 12 ft. min.
- b. Min. Percentage of Building Facade at Build-to-Line:**
- | | |
|--------------------------------------|------|
| (1) Primary Street: | None |
| (2) Secondary Street or Civic Space: | None |


- c. Encroachments**
- Encroachments are allowed subject to the following criteria:
- The following architectural elements are allowed to encroach into required setbacks: awnings, balconies, bay windows, cornices, eaves and similar projected elements, stairs, ramps and handrails.
 - Overhead encroachments shall have a minimum height clearance of 8 ft.

CHANGE POSITION TO BE LEFT ALIGNED

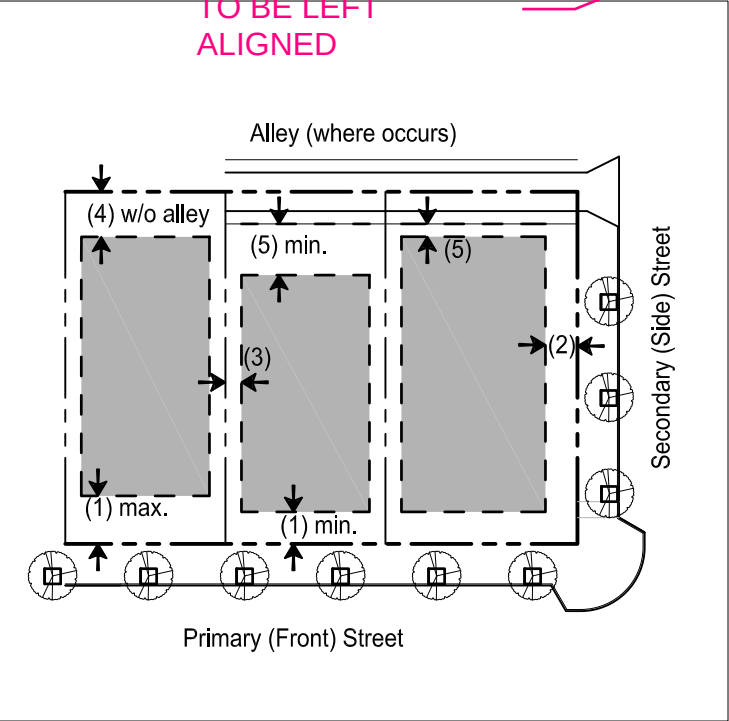

Building Placement Diagram (Plan View)

3.D BADGER MOUNTAIN SOUTH - NEIGHBORHOOD GENERAL DISTRICT (BMS-NG)

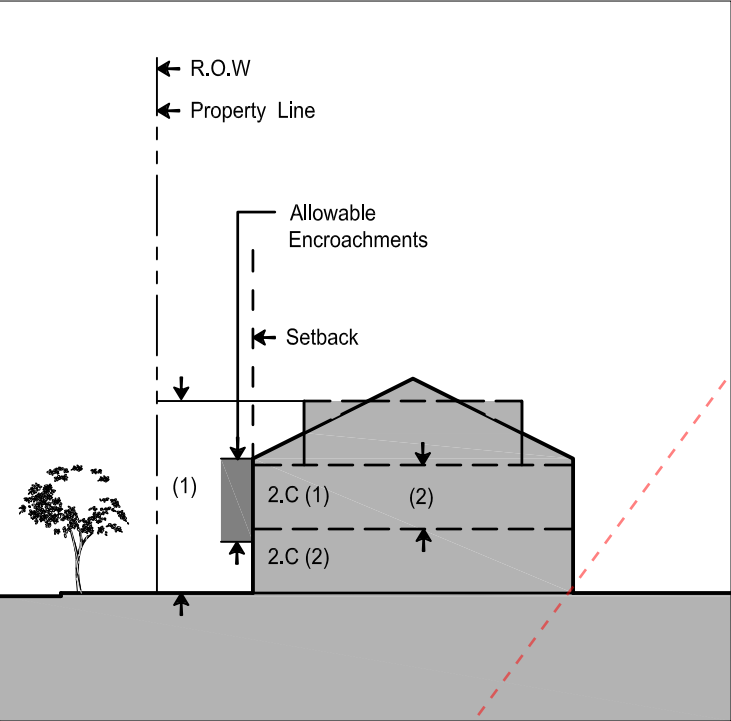

Building Profile Diagram (Section View)

3. BUILDING PROFILE AND TYPE

- a. Building Height/Stories**
- Maximum Height: 30 ft. as ~~defined~~ ^{measured} in RMC.
- b. Allowed Building Types**
- Refer to Section 8 for Building Type standards.
- | | |
|--|-------|
| (1) Civic/Community/Institutional Facilities * | (8.D) |
| (2) Courtyard Housing | (8.J) |
| (3) Mansion Apartment | (8.K) |
| (4) Paired House (Duplex) | (8.L) |
| (5) Cottage Court | (8.M) |
| (6) Single-Family House - Alley Access | (8.N) |
| (7) Single-Family House - Street Access | (8.O) |
| (8) Accessory Unit | (8.P) |
- *Only when located in a Local Park
- c. Allowed Frontage Types**
- Refer to Section 9 for Frontage Type standards. Frontage allowed here by District standards shall also be regulated per the Building Type standards in Section 8.
- | | |
|---------------|-------|
| (1) Forecourt | (9.E) |
| (2) Greenbelt | (9.F) |
| (3) Porch | (9.G) |
| (4) Stoop | (9.H) |

4. PARKING

- a. Parking Access**
- ~~(1)~~ ~~(2)~~ Parking shall be accessed from rear Alleys, if provided.
- ~~(2)~~ ~~(3)~~ Parking access from street must meet Block Standards set forth in Section ~~7.C.4~~ ^{7.B.4} and Building Type standards in Section 8.O Single-Family House-Street Access.

- (9) Appurtenant Structures are allowed subject to the following:
- Appurtenant structures related to residential uses such as small sheds (<336 sq. ft), covered patios, attached pergolas and free-standing pergolas are permitted, subject to recorded covenants, conditions, and restrictions.
 - Appurtenant structures which are attached to a building shall meet the main building setbacks and shall comply with all site requirements including maximum building height and maximum lot coverage.
 - Detached appurtenant structures in BMS-NG, see RMC 23.38.020.

~~b.~~ ^{c.} Parking Requirements

- Residential Parking Requirements:
 - 1 space per unit minimum.
 - 1 space per 2 units minimum is required for Affordable or Senior Housing units.
- Maximum 3 car garage door frontage on front load lots. On alley access lots, and front load lots developed with side-yard garage, or when developed with one garage bay recessed a minimum 8 ft. from the other garage bays and the house has a front porch of at least 80 sq. ft., 3 car garage door frontages are permitted.
- Outside parking or storage of boats and recreational vehicles is only permitted within a garage or other permitted accessory structure, or within designated Neighborhood or Community Storage Areas.
- The driveway width within the right of way (ROW) shall not exceed of 50% of the primary street frontage or a maximum width of 35 feet on any single family lot to ensure that on street parking within the development. Driveways may flare out once outside the ROW or access tract.

~~c.~~ ^{d.} Miscellaneous

- For multi-family and commercial development, see Section 13.D for Common Parking Standards.
- Parking and aisle dimensions per City of Richland standards - see RMC 23.54.




Illustrative Photo: Single Family Homes fronting on Open Spaces

1. NEIGHBORHOOD EDGE DISTRICT INTENT

The Neighborhood Edge (BMC-NE) District is solely residential in character. The houses and lots in this District tend to be a larger scale than the Neighborhood General District. These Districts are typically located along the periphery of the community.

Single-family houses and lots are provided in a range of sizes up to large custom homes on 1/4 to 1 acre lots. Houses are typically accessed by streets, on lots without Alleys. Lots are larger to accommodate front street access driveways. Setbacks are deeper to create a more verdant character.


*** Unless alternative standards are recorded on a plat (i.e. additional space could be needed for lots on cul-de-sacs)

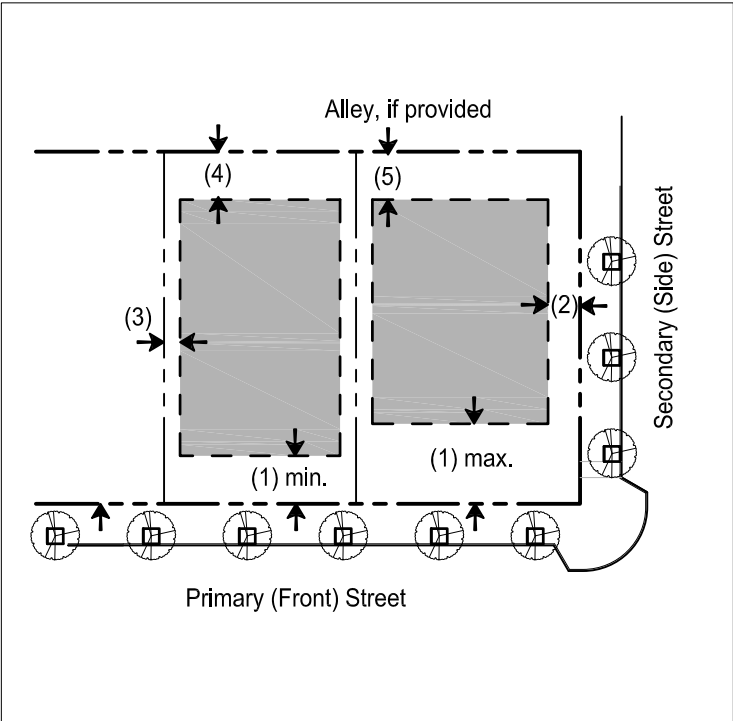

Building Placement Diagram (Plan View)

2. BUILDING PLACEMENT

- a. Setbacks** (as measured from the property line)
- Buildings shall be placed within the shaded area as shown in the building placement diagram.
- (1) Front Build-to-Line*** 15 ft. min.; 35 ft. max. *
* Maximum setback does not apply to lots => 1/4 acre.
 - (2) Side Street Setback: 10 ft. min.
 - (3) Side yard Setback: 6 ft. min.
 - (4) Rear Setback: 15 ft. min. **
** For lots in the BMS-NE District that border commercial orchards active at the time these development standards are adopted, no residential structures or swimming pools shall be located within 150 feet, measured from the rear property line, bordering such uses. If active agricultural uses cease, then this requirement shall no longer apply.
 - (5) Alley Setback: 4 ft. OR 16 ft. min. (if provided)*
* Alley setback is measured from edge of Alley easement. To ensure that parking locations off Alley are adequate, buildings shall either be placed at 4 ft. (no parking) OR 16 ft. (parking).
- b. Min. Percentage of Building Facade at Build-to-Line:**
- (1) Primary Street: None
 - (2) Secondary Street or Civic Space: None
- c. Encroachments**
- Encroachments are allowed subject to the following criteria:
- (1) The following architectural elements are allowed to encroach into required setbacks: awnings, balconies, bay windows, cornices, eaves and similar projected elements, stairs, ramps and handrails.
 - (2) Overhead encroachments shall have a minimum height clearance of 8 ft.

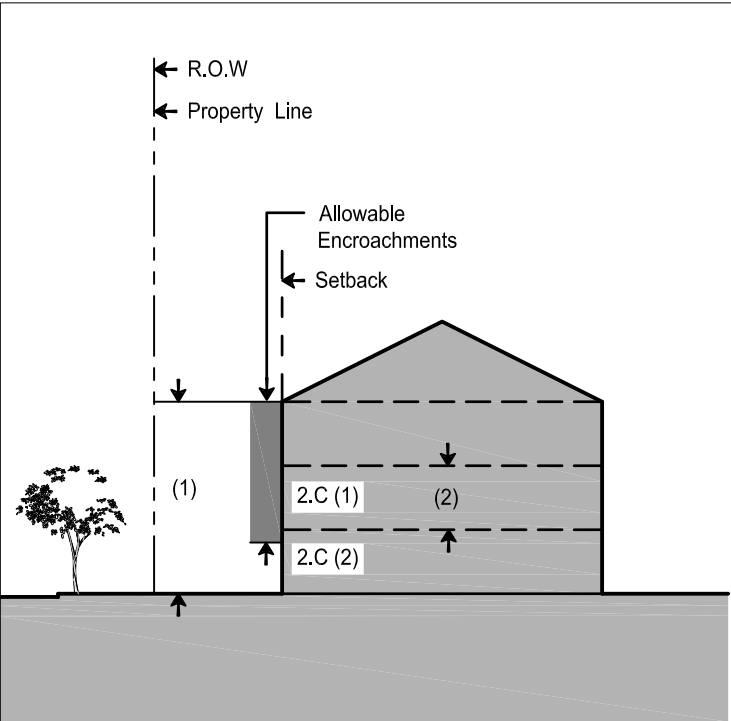

Building Profile Diagram (Section View)

3. BUILDING PROFILE AND TYPE

- a. Building Height/Stories**
- (1) Maximum Height: 30 ft. as ~~defined~~ ^{measured} in RMC
- b. Allowed Building Types**
- Refer to Section 8 for Building Type definitions and standards.
- (1) Single-Family House - Alley Access (8.N)
 - (2) Single-Family House - Street Access (8.O)
 - (3) Accessory Unit (8.P)
- (4)** An Accessory Storage Structure is allowed on lots .25 acre or greater if the following conditions are met:
- (i) ~~(1)~~ The maximum size, per floor, of the Accessory Storage Structure shall be less than 60% of the square foot footprint of the corresponding floor of the principal structure;
 - (ii) ~~(2)~~ The design and massing of the Accessory Storage Structure shall be compatible with the principal structure;
 - (iii) ~~(3)~~ The maximum width of the Accessory Storage Structure shall be no greater than the width of the principal structure;
 - (iv) ~~(4)~~ Maximum number of stories permitted is 2, but in all cases not taller than the principal structure;
 - (v) ~~(5)~~ The Accessory Storage Structure is located in the rear yard and meets all side yard setback requirements.
- c. Allowed Frontage Types**
- Refer to Section 9 for Frontage Type standards. Frontage allowed here by District standards shall also be regulated per the Building Type standards in Section 8.
- (1) Forecourt (9.E)
 - (2) Porch (9.G)
 - (3) Stoop (9.H)

4. PARKING

- a. Parking Access**
- (1) Parking may be accessed from streets.
 - (2) Parking may be accessed by Alleys, if provided.
- b. Parking Requirements**
- (1) Residential Parking Requirements: 1 space per unit minimum.
 - (2) Maximum 3 car garage door frontage.
 - (3) Outside parking or storage of boats and recreational vehicles is only permitted within a garage or other permitted accessory structure, or within designated Neighborhood or Community Storage Areas.

- (5) Appurtenant Structures are allowed subject to the following:
- a. Appurtenant structures related to residential uses such as small sheds (<336 sq. ft), covered patios, attached pergolas and free-standing pergolas are permitted, subject to recorded covenants, conditions, and restrictions.
 - b. Appurtenant structures which are attached to a building shall meet the main building setbacks and shall comply with all site requirements including maximum building height and maximum lot coverage.
 - c. Detached appurtenant structures in BMS-NE, see RMC 23.38.020

CHANGE POSITION
TO BE LEFT
ALIGNED



Illustrative Photo: Playground in Local Park

1. CIVIC DISTRICT INTENT

The Civic District contains all of the open space in the Badger Mountain South community, as well as the schools, civic and community facilities located throughout the neighborhoods. This District encompasses 30% of the Badger Mountain South overall site and is one of the most significant features supporting the vision of a walkable and sustainable community. This District provides both passive and active open space areas supporting a variety of activities and uses. It also contains the trail network providing a pedestrian scale, walkable, safe, and healthy means of travel throughout the site.

Buildings in this District are primarily intended for Civic, Community or Institutional uses. These built structures may include playgrounds, picnic shelters, bathroom facilities, and open space maintenance structures, as well as significant institutional, community and civic buildings. Due to the wide range of buildings with unique disposition and configurations, some of the typical Urban Form Standards for Districts do not apply to this District.

Refer to Section 5 Civic Space Standards for Open Space Standards within this District.



Illustrative Photo: School / Institutional Facility

2. BUILDING PLACEMENT

a. Setbacks* (as measured from the property line)

- | | |
|--------------------------|--------|
| (1) Front Build-to-Line: | None * |
| (2) Side Street Setback: | None * |
| (3) Side yard Setback: | None * |
| (4) Rear Setback: | None * |
| (5) Alley Setback: | None * |

*Civic sites are often located along the BMS Trail and Greenbelt open space network, see 5.B for Greenbelt locations and 5.K for Trail layout. When a trail is shown on a proposed Civic site, buildings must be setback to allow the continuation of the trail through the property, see 5.L 5.K for Trail Type standards. When adjacent sites also contain a Greenbelt, the minimum building setback shall match the dimension of the Greenbelt, see 5.H. 5.F.

b. Min. Percentage of Building Facade at Build-to-Line:

- | | |
|----------------------------------|------|
| Primary Street: | None |
| Secondary Street or Civic Space: | None |

c. Encroachments

Encroachments are allowed subject to the following criteria:

- (1) The following architectural elements are allowed to encroach into required setbacks and/or Public Right of Way (R.O.W.): awnings, galleries, balconies, bay windows, signs, cornices, eaves, flags and similar projected elements.
- (2) Stairs, ramps and handrails are allowed to encroach into required setbacks only.
- (3) Overhead encroachments shall have a minimum height clearance of 8 ft.
- (4) A City of Richland license must be obtained for encroachments that occur over sidewalks or City airspace. See RMC 5.14.



Illustrative Photo: Community Building

3. BUILDING PROFILE AND TYPE

a. Building Height/Stories

- (1) Maximum Height: 40 ft. as ~~defined~~^{measured} in RMC when adjacent to Neighborhood General District (BMS-NG).
- (2) Maximum Height: 40 ft. as ~~defined~~ in RMC when adjacent to Village Mixed Use (BMS-VMU) and Neighborhood Collector (BMS-NC) Districts.
- (3) If ground floor community space is provided, the ground floor ceiling shall be a minimum of 10 ft. clear height, as measured from finished floor slab to underside of finished ceiling.
- (4) For flat roofs, rooftop equipment may exceed the height limit by 10 ft, provided it is located no closer than 15 ft. to edge of exterior wall, otherwise equipment shall be concealed within the attic space.
- (5) For flat roofs, a parapet is allowed to extend above the maximum height limit by 4 ft.
- (6) Towers, spires, flag poles or other architectural elements may extend 12 ft. above height limit.

b. Allowed Building Types

Refer to Section 8 for Building Type standards.

- (1) Civic/Community/Institutional Facilities (8.D)

c. Allowed Frontage Types

Frontage Types do not apply in Civic Districts.



Illustrative Photo: Civic Building

4. PARKING

a. Parking Placement

- | | |
|--------------------------|--------------|
| (1) Front setback: | Not allowed. |
| (2) Side street setback: | 15 ft. min. |
| (3) Side yard Setback: | 15 ft. min. |
| (4) Rear Setback: | 15 ft. min. |

b. Parking Requirements

- (1) Parking Requirements: Maximum 3 spaces per 1,000 SF of bldg. area.
- (2) Within the Greenway Parks only, on-site parking shall be allowed for Civic space uses that may not be associated with a building; total parking quantity to be determined by user demand. Available on-street parking within 600 feet of the proposed use must be counted towards satisfying the parking demand.
- (3) Parking requirements for Public Parks shall be as required per the City of Richland Parks, Trails and Open Space Master Plan.
- (4) Parking requirements for schools shall be as required per the respective school authorities.

c. Miscellaneous

- (1) See Section 13.D for Common Parking Standards.
- (2) Parking and aisle dimensions per City of Richland standards - see RMC 23.54.
- (3) Maximum of 20% of required parking may be compact stalls at a dimension of 8' x 16'.



**SPECIAL
DISTRICT
STANDARDS**

4

Section 4 identifies the standards and requirements for each Special District within Badger Mountain South.

4.A	Introduction.....	4-2
4.B	Specialty Retail (BMS-SD-SR).....	4-2
4.C	Commercial Mixed-Use (BMS-SD-CMU).....	4-3
4.D	Destination Retail (BMS-SD-DR).....	4-3

4.A INTRODUCTION

This section of the LUDR identifies the Special District development standards. Special Districts are unique areas that by intent, function, disposition or configuration play an important role in establishing the vision of the Badger Mountain South community.

The Special Districts are identified in Section 2.B – Regulating Plan for Land Use and Urban Form, with the following color-legend:

- Special District - Specialty Retail (BMS-SD-SR)
- Special District - Commercial Mixed-Use (BMS-SD-CMU)
- Special District - Destination Retail (BMS-SD-DR)

Because of the unique nature of the Special Districts, development within these areas is guided by the intent, guidelines and/or standards as follows for each District.

Although the Special Districts are not regulated by Building Types, the Common Design Standards in Section 8.C are applicable to these Districts.

4.B BADGER MOUNTAIN SOUTH SPECIAL DISTRICT- SPECIALTY RETAIL (BMS-SD-SR)

SEE REGULATING PLAN FOR LOCATION



Illustrative Sketch: Birds-eye View of Specialty Retail Village

1. SPECIAL DISTRICT - SPECIALTY RETAIL INTENT

The Special District - Specialty Retail (BMS-SD-SR) is intended to support and provide development opportunities for the growing interest in local and regional agricultural products, in particular the local wine industry. As such it serves both the City of Richland as well as the region.

It is also intended to:

- Provide a gathering place for group events, festivals and other community-wide activities;
- Provide sites for: vineyards, wine caves, wineries, tasting rooms, wine making, other specialty brewing and craft distilling, the sale of other agricultural-related products, education, retail and hospitality that support this focus; and
- Showcase innovative sustainable design features in both building and site design.



Illustrative Sketch: Outdoor Plaza, Cave Entrance, and Vineyard

2. SPECIALTY RETAIL DISTRICT STANDARDS

- Each building design should include sustainable features. Refer to Section 12 for Sustainable Standards.
- Buildings are encouraged to be sited to take advantage of views.
- Pedestrian connectivity between development sites shall be emphasized, the use of unique pavement or landscape treatments shall be encouraged.
- Spaces between buildings shall be considered for design purposes as common spaces to be shared among all users in the District and should be designed to function in this way, unless necessary for essential uses such as utility services, waste collection, or delivery services.
- Service areas shall be integrated into the building design to provide screening for equipment, recycling, trash and similar.
- Buildings may vary in height between one to three stories; daylight basements are not included in the story count. Landmark structures such as a clock or bell tower may have a maximum height of 80 ft. and no signage shall be permitted above street level.
- Exterior lighting shall meet the Badger Mountain South Light Standards, Section 12.C.3.
- Landscaping shall meet the Common and Commercial Landscape Standards in Section 11.
- Parking per Common Parking Standards, Section 13.D.
- See also Section 8.C for Common Design Standards for all Districts: Commercial Districts and Projects.



Illustrative Photo: Wine Cave Storage

4.C BADGER MOUNTAIN SOUTH
SPECIAL DISTRICT - COMMERCIAL MIXED-USE (BMS-SD-CMU)

SEE REGULATING
PLAN FOR LOCATION



Illustrative Photo: Outdoor Restaurant Plaza / Urban Trail

1. SPECIAL DISTRICT - COMMERCIAL MIXED-USE INTENT

The Special District - Commercial Mixed-Use (BMS-SD-CMU) comprises approximately 45 acres between Dallas Road and the Special District -Specialty Retail. The District can accommodate a wide variety of uses as it is intended to be a major employment center for the City of Richland and a destination for shopping, higher-level education, dining, office uses and other employment centers, Multi-family/Mixed-Use housing, entertainment and recreation. Public facilities, including transit centers, may also be accommodated in this District.

To further the walkable and sustainable goals of Badger Mountain South, the design of the Special District - Commercial Mixed-Use will ensure that pedestrian are accommodated between buildings or groups of buildings, that public plazas and other community features will be developed as part of the overall development plan, and that connectivity will be maintained to adjoining Districts.



Illustrative Photo: Office above Retail Streetscape

2. SPECIAL DISTRICT-COMMERCIAL MIXED-USE STANDARDS

- a. Enhance pedestrian experience:
 - i. Entries: functional entries must enhance pedestrian experience by fronting onto public space.
 - ii. Sidewalks: Provide continuous sidewalks along all street frontages and between buildings and blocks.
 - iii. Plazas and common spaces: shall be provided with appropriate amenities including benches, trash and recycling containers and bike racks. Plazas shall be designed to create a unique development identity and are encouraged to also include public art. Refer to Section 5.E for Plaza standards.
 - iv. Maximize views to Badger Mountain.
- b. Signage, landscaping, and building architectural features will be complementary and will emphasize the District as the entryway to the City of Richland.
- c. Service areas shall be integrated into the building design to properly screen it from the center plaza and public streets. This includes areas for trash, recycling and equipment storage.
- d. Building Heights:
Four (4) stories with a maximum height limit of 55 ft.; daylight basements are not included in the story height. Landmark structures such as a clock or bell tower may have a maximum height of 80 ft. At least 50 percent of the first story of building is dedicated to commercial space.
- e. Landscaping shall meet the Common and Commercial Landscape Standards, Section 11.
- f. Sustainable Standards per Section 12.
- g. Exterior lighting shall meet the Badger Mountain South Light Standards, Section 12.C.3.
- h. Other Site Improvements as appropriate and identified in Section 13.
- i. Parking per Common Parking Standards, Section 13.D.
- j. See also Section 8.C for Common Design Standards for all Districts. **Commercial Districts and Projects.**

4.D BADGER MOUNTAIN SOUTH
SPECIAL DISTRICT - DESTINATION RETAIL (BMS-SD-DR)

SEE REGULATING
PLAN FOR LOCATION



Illustrative Photo: Outdoor Retail Plaza

1. SPECIAL DISTRICT -DESTINATION RETAIL INTENT

The Special District - Destination Retail (BMS-SD-DR) includes more than 80 acres west of Dallas Road at Interstate 82. The District is highly visible to motorists on the freeway and has direct access from the existing I-82 on-ramp.

It is the intent of the Special District - Destination Retail is to accommodate a wide variety of uses both for the community and for the region with an integrated development concept. Development may include an open air shopping village with large-scale retail, restaurants, hotels, entertainment and Mixed-Use, Multi-family housing.



Illustrative Photo: Cinema Complex

2. SPECIAL DISTRICT - DESTINATION RETAIL STANDARDS

- a. All standards of the BMS-SD-CMU District apply.
- b. When Mixed-Use development or Live/Work housing is provided, attention shall be given to provide appropriate residential amenities such as decks, gardens, and segregated open space restricted to the residential units.
- c. Internal circulation for the development as a whole within the District shall be considered in order to provide appropriate access to Dallas Road, safe pedestrian accommodation, adequate space for common areas including plazas or other seating, and the efficient use of parking.

THIS PAGE INTENTIONALLY LEFT BLANK



**CIVIC
SPACE
STANDARDS**

5

Section 5 describes regulations for the civic open space throughout the Badger Mountain South community.

Update all
as needed

5.A	Civic Space Introduction.....	5-2
5.B	Greenway Parks.....	5-2
5.C	Local Parks.....	5-3
5.D	Plaza / Town Square.....	5-3
5.E	Greenbelts.....	5-4
5.F	Public Parks and School Open Space.....	5-4
5.G	Trails Introduction.....	5-5
5.H	Illustrative Plan For Trail Layout and Trail Types.....	5-5
5.I	Trails.....	5-6

5.A CIVIC SPACE INTRODUCTION

The Illustrative Plan for Civic Space Layout includes most of the types of open space, parks, trails and community facilities that will be constructed in Badger Mountain South. It is intended to illustrate that these places and spaces are interwoven into each neighborhood, although the exact locations are not yet identified. Final locations will be based upon the blocks, Building Types and final street grid that are established. This extensive network of common spaces is an important component of creating a walkable and sustainable community.

Most of the areas illustrated here and described in this Section 5 will be sited at time of platting. For city-owned facilities or properties developed as part of a public school system or by any other public entity, those public bodies will identify the planning, programming and timing of development of those spaces.

All of the plazas and other common areas to be constructed within the commercial Districts are not shown here. These areas will be further defined at the time of site plan review.

5.B GREENWAY PARKS



Illustrative Photo: Picnic Area in Greenway Park

1. GREENWAY PARKS

- a. **Intent** - There are three large Greenway Parks in Badger Mountain South as identified on the Illustrative Plan for Civic Space Layout, 5.B. The Greenway Parks are intended to be generally non-irrigated areas naturalized with drought tolerant grasses and other plantings. However, they may also contain irrigated areas of gardens, orchards and vineyards, as well as trails and other amenities as described below. These parks provide the opportunity for biking or walking the entire community without having to use the city streets. Each of the three Greenway Parks contains some unique feature or amenity in addition to features common to all.

b. **Common Standards**

- (1) Primary and Secondary Trails as indicated on the Illustrative Plan for Trail Layout and Trail Types (5.K), and Standards for Trails (5.L).
- (2) Recycled, composite-plastic trash and recycling containers located at the main entrances to the Greenway Parks.
- (3) Graded areas hydro-seeded with drought tolerant meadow seed mix with temporary irrigation until established.
- (4) Shade trees and drought-tolerant shrubs, as listed in Section 11 – Landscape Standards, will be planted in identified pockets of the Greenway Parks and provided with temporary irrigation.
- (5) Identifying signage will be provided at each major entrance to the Greenway Parks.
- (6) On-site parking may be provided as determined by proposed use and anticipated demand. Parking requirements per BMS-Civic District, see Section 3.F.

2. THE RAVINE

- a. **Location** - Western edge of the West Village Neighborhood. See Illustrative Plan for Civic Space Layout, 5.B.
- b. **Size**
- (1) Minimum: 40 acres
 - (2) Maximum: 50 acres



Illustrative Photo: Secondary Trail in Greenway Park

c. **General Character**

- (1) Minimize impacts to the existing ravine and associated rolling topography.
- (2) Extensive trail and exercise system.
- (3) Provide trail connections to adjacent West Village Neighborhood.
- (4) Intended activities include general exercise and fitness with recreational biking, jogging, walking, roller blading, and skating.

d. **Standards**

- (1) Minimum Width: 150 feet
- (2) Maximum Width: None

e. **Additional Required Amenities:**

- (1) Minimum 1,500 LF - Primary Trail with lighting.
- (2) Minimum 5,000 LF – Secondary Trail.
- (3) Site Furnishings including benches, trash and recycling receptacles and bike racks, per Section 13.C standards.
- (4) (100) shrubs
- (5) (60) 1-1/2” cal. shade trees
- (6) Landscape improvements including hydro-seeded meadows, shade trees and shrubs.
- (7) Multi-station exercise course.

3. THE RESERVE

- a. **Location** - Primary open space in East Market Neighborhood, running west into the West Vineyard Neighborhood. See Illustrative Plan for Civic Space Layout, 5.B.
- b. **Size**
- (1) Minimum: 80 acres
 - (2) Maximum: 90 acres
- c. **General Character**
- (1) Vast primary open space running between town centers that serves the entire community.
 - (2) Predominantly passive recreation and naturalistic landscape separating multiple parks, community gardens, and other use areas.
 - (3) Provides grand entry opportunity at the Badger Mountain South east entrance.



Illustrative Photo: Trail Network in Greenway Park

- (4) Intended activities include general exercise and fitness with recreational biking, jogging, walking, roller blading, skating, children’s play areas, a variety of active recreation and gardens.

d. **Standards**

- (1) Minimum Width: 150 Feet
- (2) Maximum Width: None

e. **Additional Required Amenities:**

- (1) Minimum 8,000 LF - Primary Trail with lighting.
- (2) Minimum 4,000 LF – Secondary Trail.
- (3) Site furnishings including benches, trash and recycling receptacles, bike racks, and picnic tables, per Section 13.C standards.
- (4) (200) shrubs
- (5) (120) 1-1/2” cal. shade trees
- (6) Landscape improvements including hydro-seeded meadows, shade trees and shrubs.
- (7) Dog park minimum 1.5 acres with perimeter fencing, (1) shade structures, and access to water (potable and irrigation).
- (8) Open play field of minimum 3 acres with a permanent irrigation system.
- (9) Children’s playground with creative play structures for two distinct age ranges and associated seating areas.
- (10) Three picnic areas located adjacent to activity centers with benches, tables and associated landscaping.

4. THE ORCHARD GREEN

- a. **Location** - Primary open space in South Orchard Neighborhood, running northeast into the East Market Neighborhood. See Illustrative Plan for Civic Space Layout, 5.B.
- b. **Size**
- (1) Minimum: 80 acres
 - (2) Maximum: 90 acres
- c. **General Character**
- (1) Defining open space for the South Orchard Neighborhood.

5.A CIVIC SPACE INTRODUCTION

The Illustrative Plan for Civic Space Layout includes most of the types of open space, parks, trails and community facilities that will be constructed in Badger Mountain South. It is intended to illustrate that these places and spaces are interwoven into each neighborhood although the exact locations are not yet identified. Final locations will be based upon the blocks, Building Types and final street grid that are established. This extensive network of common spaces is an important component of creating a walkable and sustainable community.

Most of the areas illustrated here and described in this Section 5 will be sited at time of platting. For city-owned facilities or properties developed as part of a public school system or by any other public entity, those public bodies will identify the planning, programming and timing of development of those spaces.

All of the plazas and other common areas to be constructed within the commercial Districts are not shown here. These areas will be further defined at the time of site plan review.

At its completion, Badger Mountain South will have 187 acres of open space, including open space in city parks or at school sites*.

* As of the most recent revision of this document, approximately 34.6 acres of open space has been dedicated in West Vineyard Phase 1, West Village Phases 1-4, Goose Ridge Phase 1, and in BSP 4732 Lot 20. All phases of the Goose Ridge development will total 40 acres.

GREENBELTS

GREENWAY PARKS


LOCAL PARKS

OTHER OPEN SPACE

PUBLIC PARKS

RESERVED SCHOOL SITE

5.B ILLUSTRATIVE PLAN FOR CIVIC SPACE LAYOUT

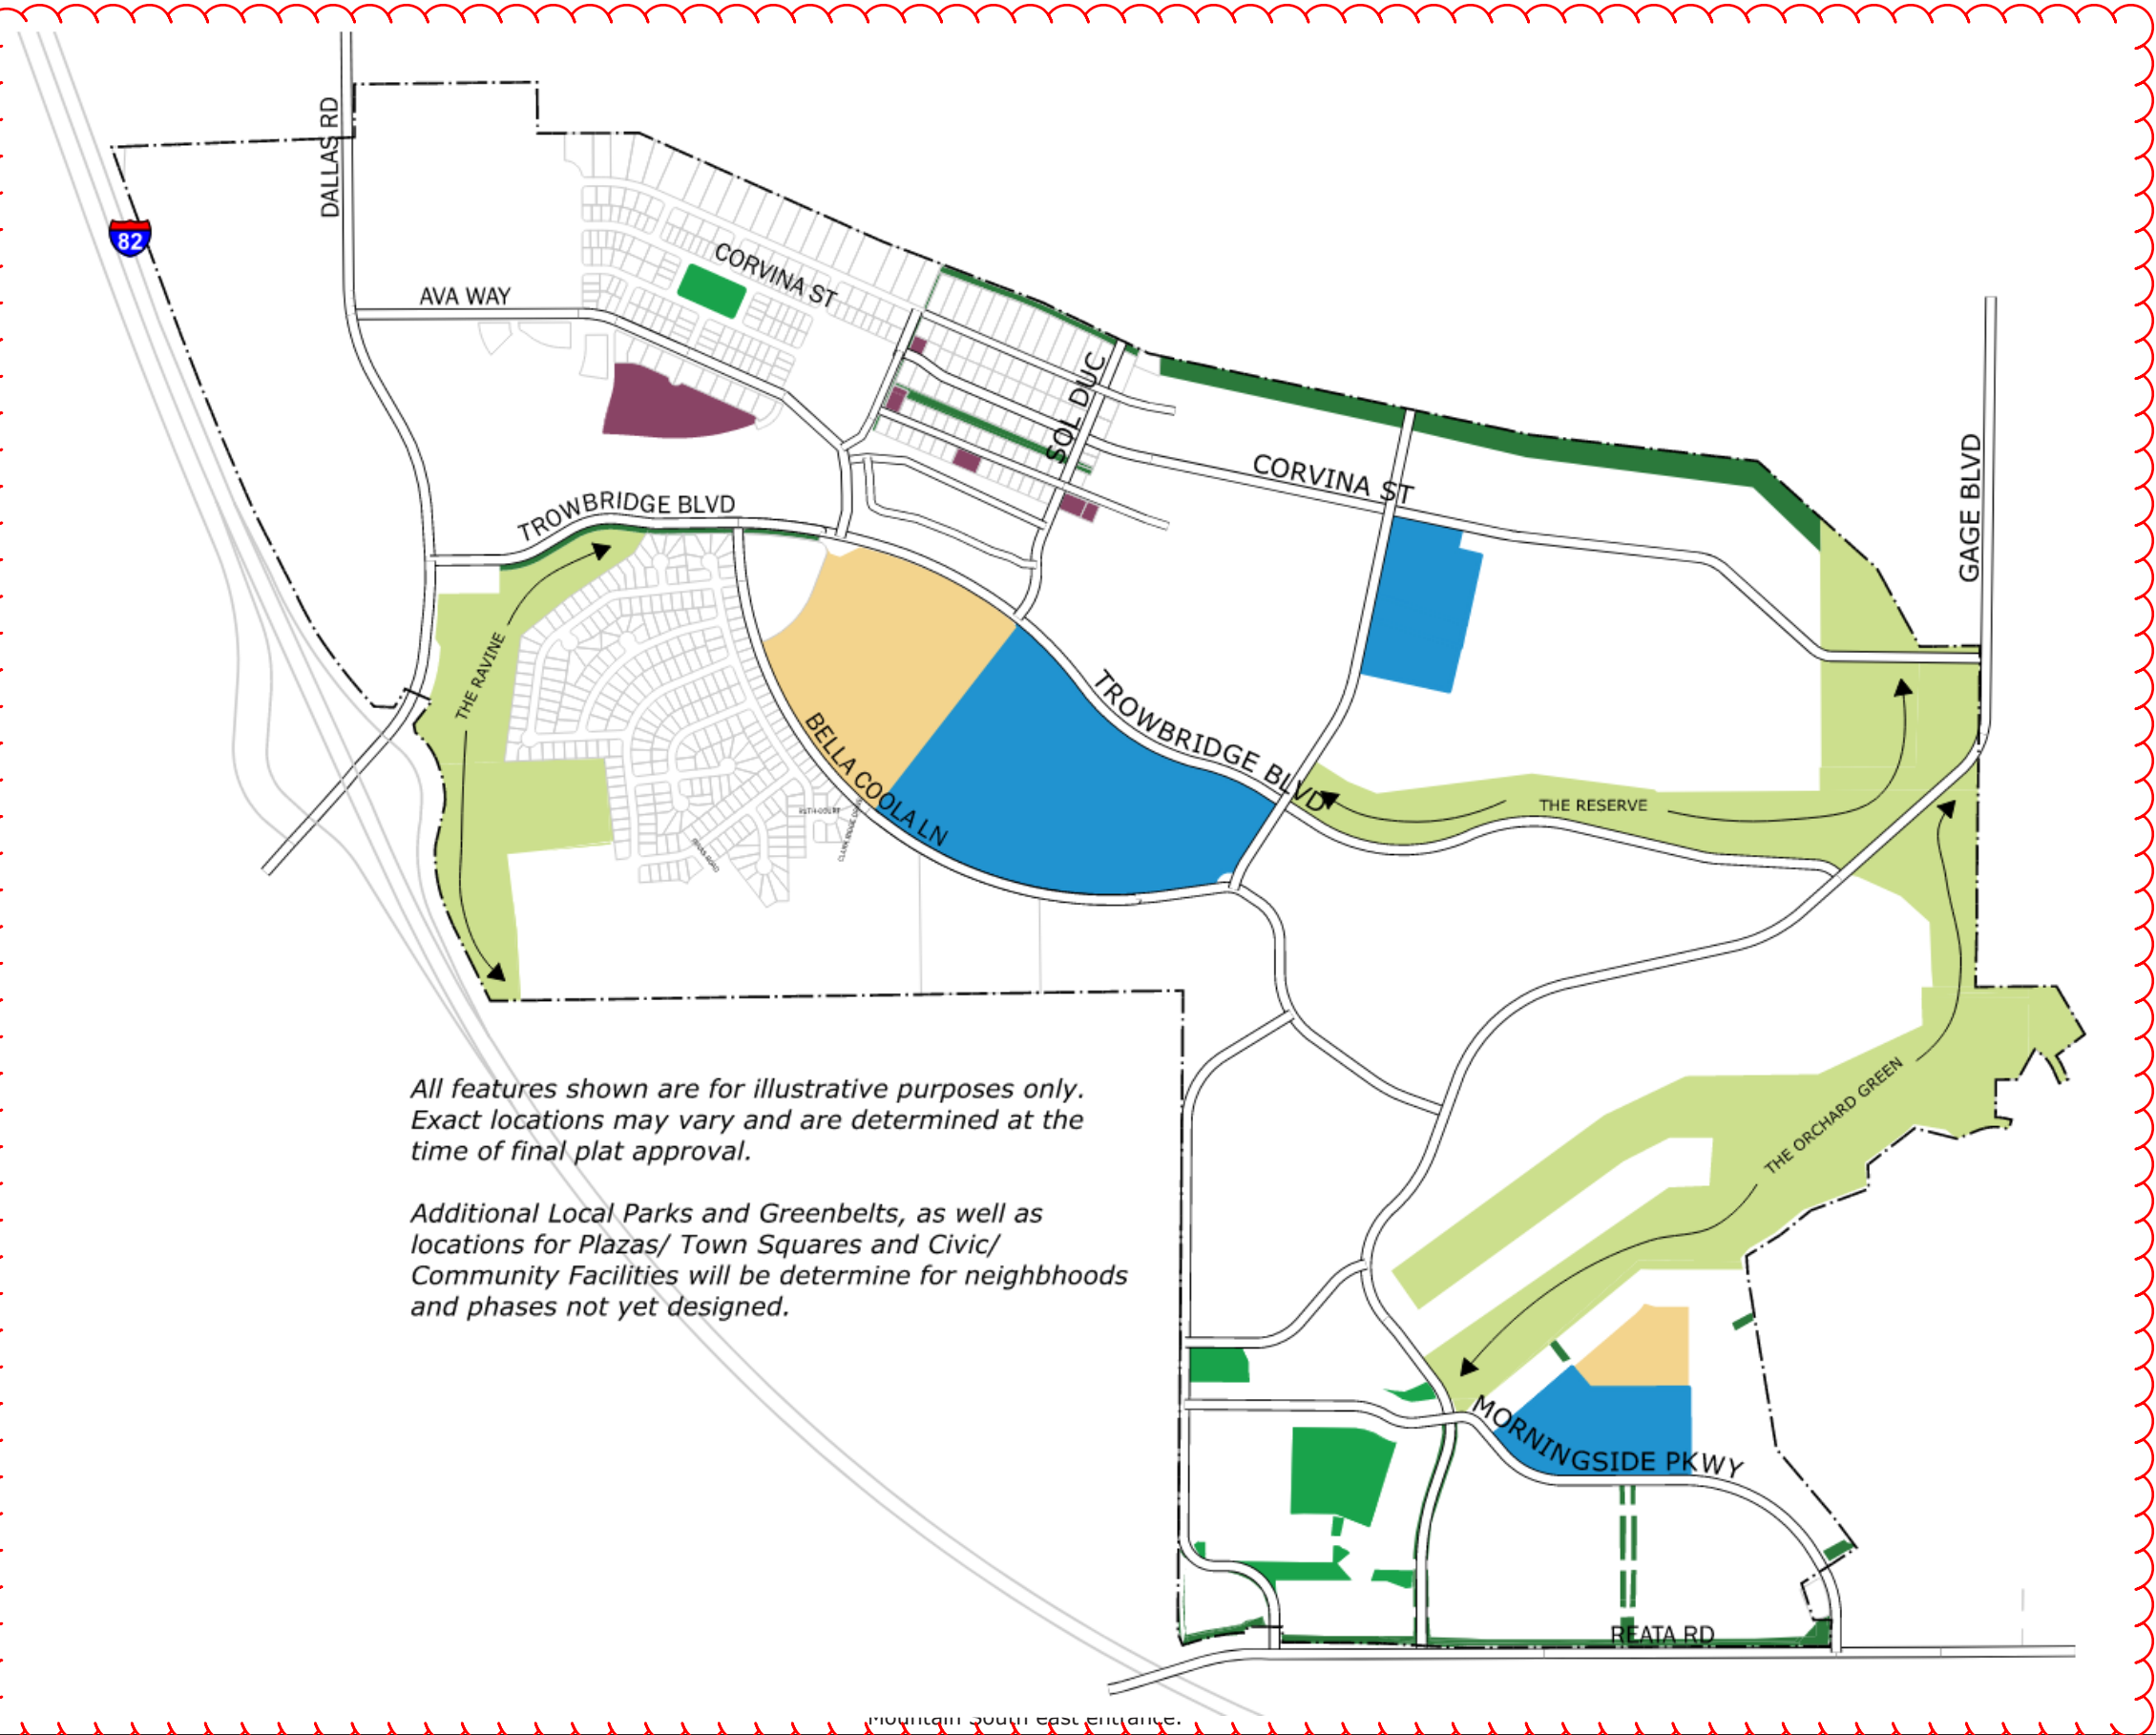

5.C
~~5.B~~ GREENWAY PARKS



Illustrative Photo: Picnic Area in Greenway Park

1. GREENWAY PARKS

- a. Intent** - There are three large Greenway Parks in Badger Mountain South as identified on the Illustrative Plan for Civic Space Layout, 5.B. The Greenway Parks are intended to be generally non-irrigated areas naturalized with drought tolerant grasses and other plantings. However, they may also contain irrigated areas of gardens, orchards and vineyards, as well as trails and other amenities as described below. These parks provide the opportunity for biking or walking the entire community without having to use the city streets. Each of the three Greenway Parks contains some unique feature or amenity in addition to features common to all.

b. Common Standards

- (1) Primary and Secondary Trails as indicated on the Illustrative Plan for Trail Layout and Trail Types ~~(5.K)~~, and Standards for Trails ~~(5.L)~~. update this
- (2) Recycled, composite-plastic trash and recycling containers located at the main entrances to the Greenway Parks.
- (3) Graded areas hydro-seeded with drought tolerant meadow seed mix with temporary irrigation until established.
- (4) Shade trees and drought-tolerant shrubs, as listed in Section 11 – Landscape Standards, will be planted in identified pockets of the Greenway Parks and provided with temporary irrigation.
- (5) Identifying signage will be provided at each major entrance to the Greenway Parks.
- (6) On-site parking may be provided as determined by proposed use and anticipated demand. Parking requirements per BMS-Civic District, see Section 3.F.

2. THE RAVINE

- a. Location** - Western edge of the West Village Neighborhood. See Illustrative Plan for Civic Space Layout, 5.B.

~~b. Size~~

- ~~(1) Minimum: 40 acres~~
- ~~(2) Maximum: 50 acres~~



Illustrative Photo: Secondary Trail in Greenway Park

~~b.c.~~ General Character

- (1) Minimize impacts to the existing ravine and associated rolling topography.
- (2) Extensive trail and exercise system.
- (3) Provide trail connections to adjacent West Village Neighborhood.
- (4) Intended activities include general exercise and fitness with recreational biking, jogging, walking, roller blading, and skating.

~~d. Standards~~

- ~~(1) Minimum Width: 150 feet~~
- ~~(2) Maximum Width: None~~

~~c.e.~~ Additional Required Amenities:

- (1) Minimum 1,500 LF - Primary Trail with lighting.
- (2) Minimum 5,000 LF - Secondary Trail.
- (3) Site Furnishings including benches, trash and recycling receptacles and bike racks, per Section 13.C standards.
- (4) (100) shrubs
- (5) (60) 1-1/2" cal. shade trees
- (6) Landscape improvements including hydro-seeded meadows, shade trees and shrubs.
- (7) Multi-station exercise course.

3. THE RESERVE

- ~~a.a.~~ **Location** - Primary open space in East Market Neighborhood, running west into the West Vineyard Neighborhood. See Illustrative Plan for Civic Space Layout, 5.B.

~~b. Size~~

- ~~(1) Minimum: 80 acres~~
- ~~(2) Maximum: 90 acres~~

~~b.c.~~ General Character

- (1) Vast primary open space running between town centers that serves the entire community.
- (2) Predominantly passive recreation and naturalistic landscape separating multiple parks, community gardens, and other use areas.
- (3) Provides grand entry opportunity at the Badger Mountain South east entrance.



Illustrative Photo: Trail Network in Greenway Park

- (4) Intended activities include general exercise and fitness with recreational biking, jogging, walking, roller blading, skating, children's play areas, a variety of active recreation and gardens.

~~d. Standards~~

- ~~(1) Minimum Width: 150 Feet~~
- ~~(2) Maximum Width: None~~

~~c.e.~~ Additional Required Amenities:

- (1) Minimum 8,000 LF - Primary Trail with lighting.
- (2) Minimum 4,000 LF - Secondary Trail.
- (3) Site furnishings including benches, trash and recycling receptacles, bike racks, and picnic tables, per Section 13.C standards.
- (4) (200) shrubs
- (5) (120) 1-1/2" cal. shade trees
- (6) Landscape improvements including hydro-seeded meadows, shade trees and shrubs.
- (7) Dog park minimum 1.5 acres with perimeter fencing, (1) shade structures, and access to water (potable and irrigation).
- (8) Open play field of minimum 3 acres with a permanent irrigation system.
- (9) Children's playground with creative play structures for two distinct age ranges and associated seating areas.
- (10) Three picnic areas located adjacent to activity centers with benches, tables and associated landscaping.

4. THE ORCHARD GREEN

- a. Location** - Primary open space in South Orchard Neighborhood, running northeast into the East Market Neighborhood. See Illustrative Plan for Civic Space Layout, 5.B.

b. Size

- ~~(1) Minimum: 80 acres~~
- ~~(2) Maximum: 90 acres~~

~~b.c.~~ General Character

- (1) Defining open space for the South Orchard Neighborhood.

←
reposition columns
(Section 5.C should be on
all one page)

The column below will be moved to previous page

- (2) Provides opportunity for orchards, vineyards, and other agricultural uses.
- (3) Provides grand entry corridor at the Badger Mountain South, south entrance.
- (4) Intended activities include general exercise and fitness with recreational biking, jogging, walking, roller blading, skating, children's play areas, a variety of active recreation, gardens, and other agriculture.

~~d. Standards~~

- ~~(1) Minimum Width: 150 Feet~~
- ~~(2) Maximum Width: None~~

~~C. e. Additional Required Amenities:~~

- (1) Minimum 5,000 LF - Primary Trail with lighting.
- (2) Minimum 2,000 LF - Secondary Trail.
- ~~(3) Minimum 3,000 LF - Equestrian Trail.~~
- (4) Site Furnishings including benches, trash and recycling receptacles, bike racks, and picnic tables, per Section 13.C standards
- (5) (200) shrubs
- (6) (150) 1-1/2" cal. shade or fruit-bearing trees
- (7) Landscape improvements including hydro-seeded meadows, shade trees and shrubs.
- (8) Gardens, vineyards, or orchards with irrigation and fencing if necessary; raised planter beds provided for community pea patch.
- (9) Gravel or wood chip path system, benches, storage building and water source.
- (10) Dog park minimum 1.5 acres with perimeter fencing, (1) shade structures and access to water (potable and irrigation).
- (11) Open play field of minimum 3 acres with a permanent irrigation system.
- (12) Three picnic areas located adjacent to activity centers with benches, tables and associated landscaping.

5.D

~~5.C~~ LOCAL PARKS



Illustrative Photo: Pool at Local Park

1. DESCRIPTION - LOCAL PARKS

- a. Definition** - A community space designed for both structured and passive play areas and activities. Each Local Park will contain a pedestrian path system, open lawn areas and associated planting beds (with permanent irrigation), benches, drinking fountain(s) and trash/recycling receptacles. At least one Local Park is located within each of the five Badger Mountain South residential neighborhoods.
- b. Location** - See 5.B, Illustrative Plan for Civic Space Layout; actual location determined at time of platting.
- c. Size**
 - (1) Minimum: 1 acre
 - (2) Maximum: 5 acres
- d. Standards**
 - (1) Civic/Community Facility to be located in Local Parks as shown on 5.B, Illustrative Plan for Civic Space Layout; facility type to be determined.
 - (2) On-site parking shall only be allowed if associated with a Civic/Community Facility. Parking quantity by BMS-Civic District, refer to Section 3.F.
 - (3) Irrigated lawn areas, shrub planting beds and 15 shade trees per acre, minimum 1 1/2" caliper.
 - (4) Landscaping and irrigation will be based on Landscape Guiding Principles, Section 11.B.
 - (5) Landscape materials to be selected from 11.F. Drought Tolerant and Native/Naturalized Plant List and/or 11.G Refined Plant List.
 - (6) Shade structures. Local Parks less than 3 acres in size shall include (1) one shade structure; Local Parks 3 acres and larger shall include two (2) shade structures.
 - (7) See Section 13.C for Site Improvement standards for:
 - i. Pedestrian-scale lighting
 - ii. Benches and/or removable seating
 - iii. Tables
 - iv. Trash/recycling receptacles
 - v. Bike racks



Illustrative Photo: Playground at Local Park

e. Additional Required Amenities:

- (1) Each Local Park less than 3 acres will contain at least (3) three of the following additional amenities:
 - i. Picnic area(s) with tables/benches
 - ii. Playground with (2) multi-age structures/equipment. (Counts as meeting two additional amenities.)
 - iii. Fenced community garden
 - iv. Open play field
 - v. Sport Court
 - vi. Parkour stations
 - vii. Or equivalent amenity
- (2) Local Parks 3 acres and larger will contain (3) items from above list, and (1) or more of the following:
 - i. Playground with (one) play structure
 - ii. Covered gazebo/picnic shelter
 - iii. Community swimming pool
 - iv. Aquatic spray park
 - v. Community building with restrooms
 - vi. Tiered-lawn amphitheater
 - vii. Sand volleyball court
 - viii. Water feature/fountain element
 - ix. Parkour stations
 - x. Or equivalent amenity

5.E

~~5.D~~ PLAZA/TOWN SQUARE



Illustrative Photo: Plaza open space

1. DESCRIPTION - PLAZA/TOWN SQUARE

- a. Definition** - A "hardscape" open space is designed as a community gathering space and supports amenities to commercial development. Plazas are intended to be incorporated into all commercial Districts within Badger Mountain South. The size and location of Plazas will be determined during site plan review as the developer of commercial spaces identify and design Plaza and/or common open space areas within each commercial development.
- b. Location** - All Commercial, retail and mixed-use areas; actual location determined at time of platting.
- c. Size**
 - (1) Minimum width: 20 ft.
 - (2) Minimum depth: 20 ft.
- d. Standards**
 - (1) Plaza/Town Squares will be spatially defined by building frontages, and located at intersections of Primary Pedestrian Streets.
 - (2) Landscaping and irrigation will be based on Landscape Guiding Principles, Section 11.B.
 - (3) Landscape materials to be selected from Section 11.F. or 11.G and will include 5 shade trees per acre, minimum 2" caliper.
 - (4) Decorative landscape planters, see Section 11.C.
 - (5) Electrical power sources as required.
 - (6) See Section 13.C for Site Improvement standards for:
 - i. Specialty paved surfaces
 - ii. Pedestrian-scale lighting
 - iii. Benches and/or removable seating
 - iv. Tables
 - v. Trash/recycling receptacles
 - vi. Bike racks

e. Additional Required Amenities:

- Each Plaza/Town Square will contain at least (1) one of the following additional amenities;
- (1) Water features/interactive fountains
 - (2) Kiosks
 - (3) Public art, per Section 13.C.10

5.F

5.E GREENBELTS



Illustrative Photo: Primary Trail in Greenbelt

1. DESCRIPTION - GREENBELTS

- a. **Definition** - A wide, landscape buffer or linear green space intended to soften street impacts, provide connectivity to neighborhoods, provide entry monument opportunity, and screening. Often Greenbelts will include segments of the Primary or Secondary Trail system.
- b. **Location** - See 5.B, Illustrative Plan for Civic Space Layout.
- c. **Size**
 - (1) Building Frontage Greenbelt: 28 ft. minimum width
 - (2) Greenbelt: 20 ft. minimum width
 - (3) Along rear yards and BM-NC district: 5 ft. minimum width
- d. **Standards**
 - (1) Landscaping and irrigation will be based on Landscape Guiding Principles, Section 11.B.
 - (2) Landscape materials to be selected from 11.F and 11.G
 - (3) Hydro-seeded lawn and meadow areas, evergreen and deciduous tree(s) and shrub planting beds.
 - (4) Provide permanent, drip irrigation system.
 - (5) Provide 1-1/2" cal. shade trees
 - (6) Vehicular access shall not be allowed across a Greenbelt more frequently than every 200 ft. or as required for fire and emergency access.
 - (7) Primary/Secondary Trails (most locations) – See 5.K, Illustrative Plan for Trail Layout and Trail Types. *update this*
 - (8) Where buildings front onto a Greenbelt, a 8 ft. min. sidewalk located along the property line will be provided per Greenbelt Frontage Type 9.F.
 - (9) All Greenbelts, except where the Greenbelt abuts residential use properties, may also contain the following elements which conform to Section 13.C for Site Improvement standards for:
 - i. Pedestrian-scale lighting, unless adequate lighting is provided by street lighting from the adjacent Right of Way (Primary Trails only)
 - ii. Benches - (1) one minimum every 1/2 mile
 - iii. One trash and one recycling receptable (may be a single unit with segregated elements) every mile, or located as required to facilitate servicing.
- e. **Additional Required Amenities:**

Each Greenbelt will contain at least (2) two of the following additional amenities every 1 mile:

 - (1) Mile marker indication element
 - (2) Public art, per Section 13.C.10

5.G

5.F PUBLIC PARKS AND SCHOOL OPEN SPACE



Illustrative Photos: Multiple Amenities in Public Parks and Schools

1. DESCRIPTION - PUBLIC PARKS AND SCHOOL OPEN SPACE

- a. **Definition** - The Badger Mountain South community will contain ~~(2)~~ two park facilities developed, owned and operated by the City of Richland – a 30-acre Community Park and a 6-acre Neighborhood park. The community will also contain properties that are developed as public or private school sites which will include extensive outdoor play and recreation areas. Areas identified for the ~~(2)~~ City parks and the school sites are indicated on the 5.B, Illustrative Plan for Civic Space Layouts.
- b. **Location**
 - (1) City of Richland Community Park – West Village neighborhood.
 - (2) City of Richland Neighborhood Park – South Orchard neighborhood.
 - (3) (2) School Sites – West Village neighborhood.
 - (4) School Site – East Garden neighborhood.
 - (5) Kennewick School District Site – South Orchard neighborhood.
- c. **Size**
 - (1) Community Park: 30 Acres minimum
 - (2) Neighborhood Park: 6 Acres minimum
 - (3) School Sites: 12-15 Acres (each) minimum
- d. **Standards**
 - (1) Richland City Parks will be developed and comply with the Parks, Trails and Open Space Master Plan.
 - (2) School facilities will be developed and comply with the standards and requirements of the respective school authorities.
- e. **Additional Required Amenities:**
 - (1) Not identified

5.H OTHER OPEN SPACE



1. DESCRIPTION - OTHER OPEN SPACE

- a. **Definition** - Additional open space may be established or used for storm water facilities or for growing grapes, or for other purposes not listed in sections 5C through 5G.
- b. **Location** - To be determined as platting occurs; location will be based on the type of facility and its unique design needs.
- c. **Size** - To be determined as platting occurs; sizing will be based on the type of facility and its unique design requirements.

5.G TRAILS INTRODUCTION

The Illustrative Plan for Trail Layout and Trail Types identifies the location of the proposed trail system in Badger Mountain South. Four types of trails will be built within the community – Urban Trails located within the commercial centers, paved Primary and City Primary trails for multi-uses, soft-surface Secondary Trails for walking and jogging, and an Equestrian Trail connection located at the eastern edge of the community that will link to an existing equestrian trail. At full buildout the project will include approximately 10 miles of trails and walking paths, and will provide connection locations for future development.

Two Trail Types are located in the Greenway Parks: City Primary Trails and Secondary Trails. These trails are intended to be the cross-community trail system that links all neighborhoods within Badger Mountain South. The City Primary Trail meanders within the Greenway Parks, sometimes near the adjoining streets, but primarily away from the streets and within the Greenway Park itself. Secondary Trails act as connector trails which link one side of the Greenway Park to the other or to the City Primary Trail.

TRAIL LEGEND

CITY PRIMARY TRAIL


PRIMARY TRAIL

SECONDARY TRAIL

EQUESTRIAN TRAIL

URBAN TRAIL

5.H ILLUSTRATIVE PLAN FOR TRAIL LAYOUT AND TRAIL TYPES

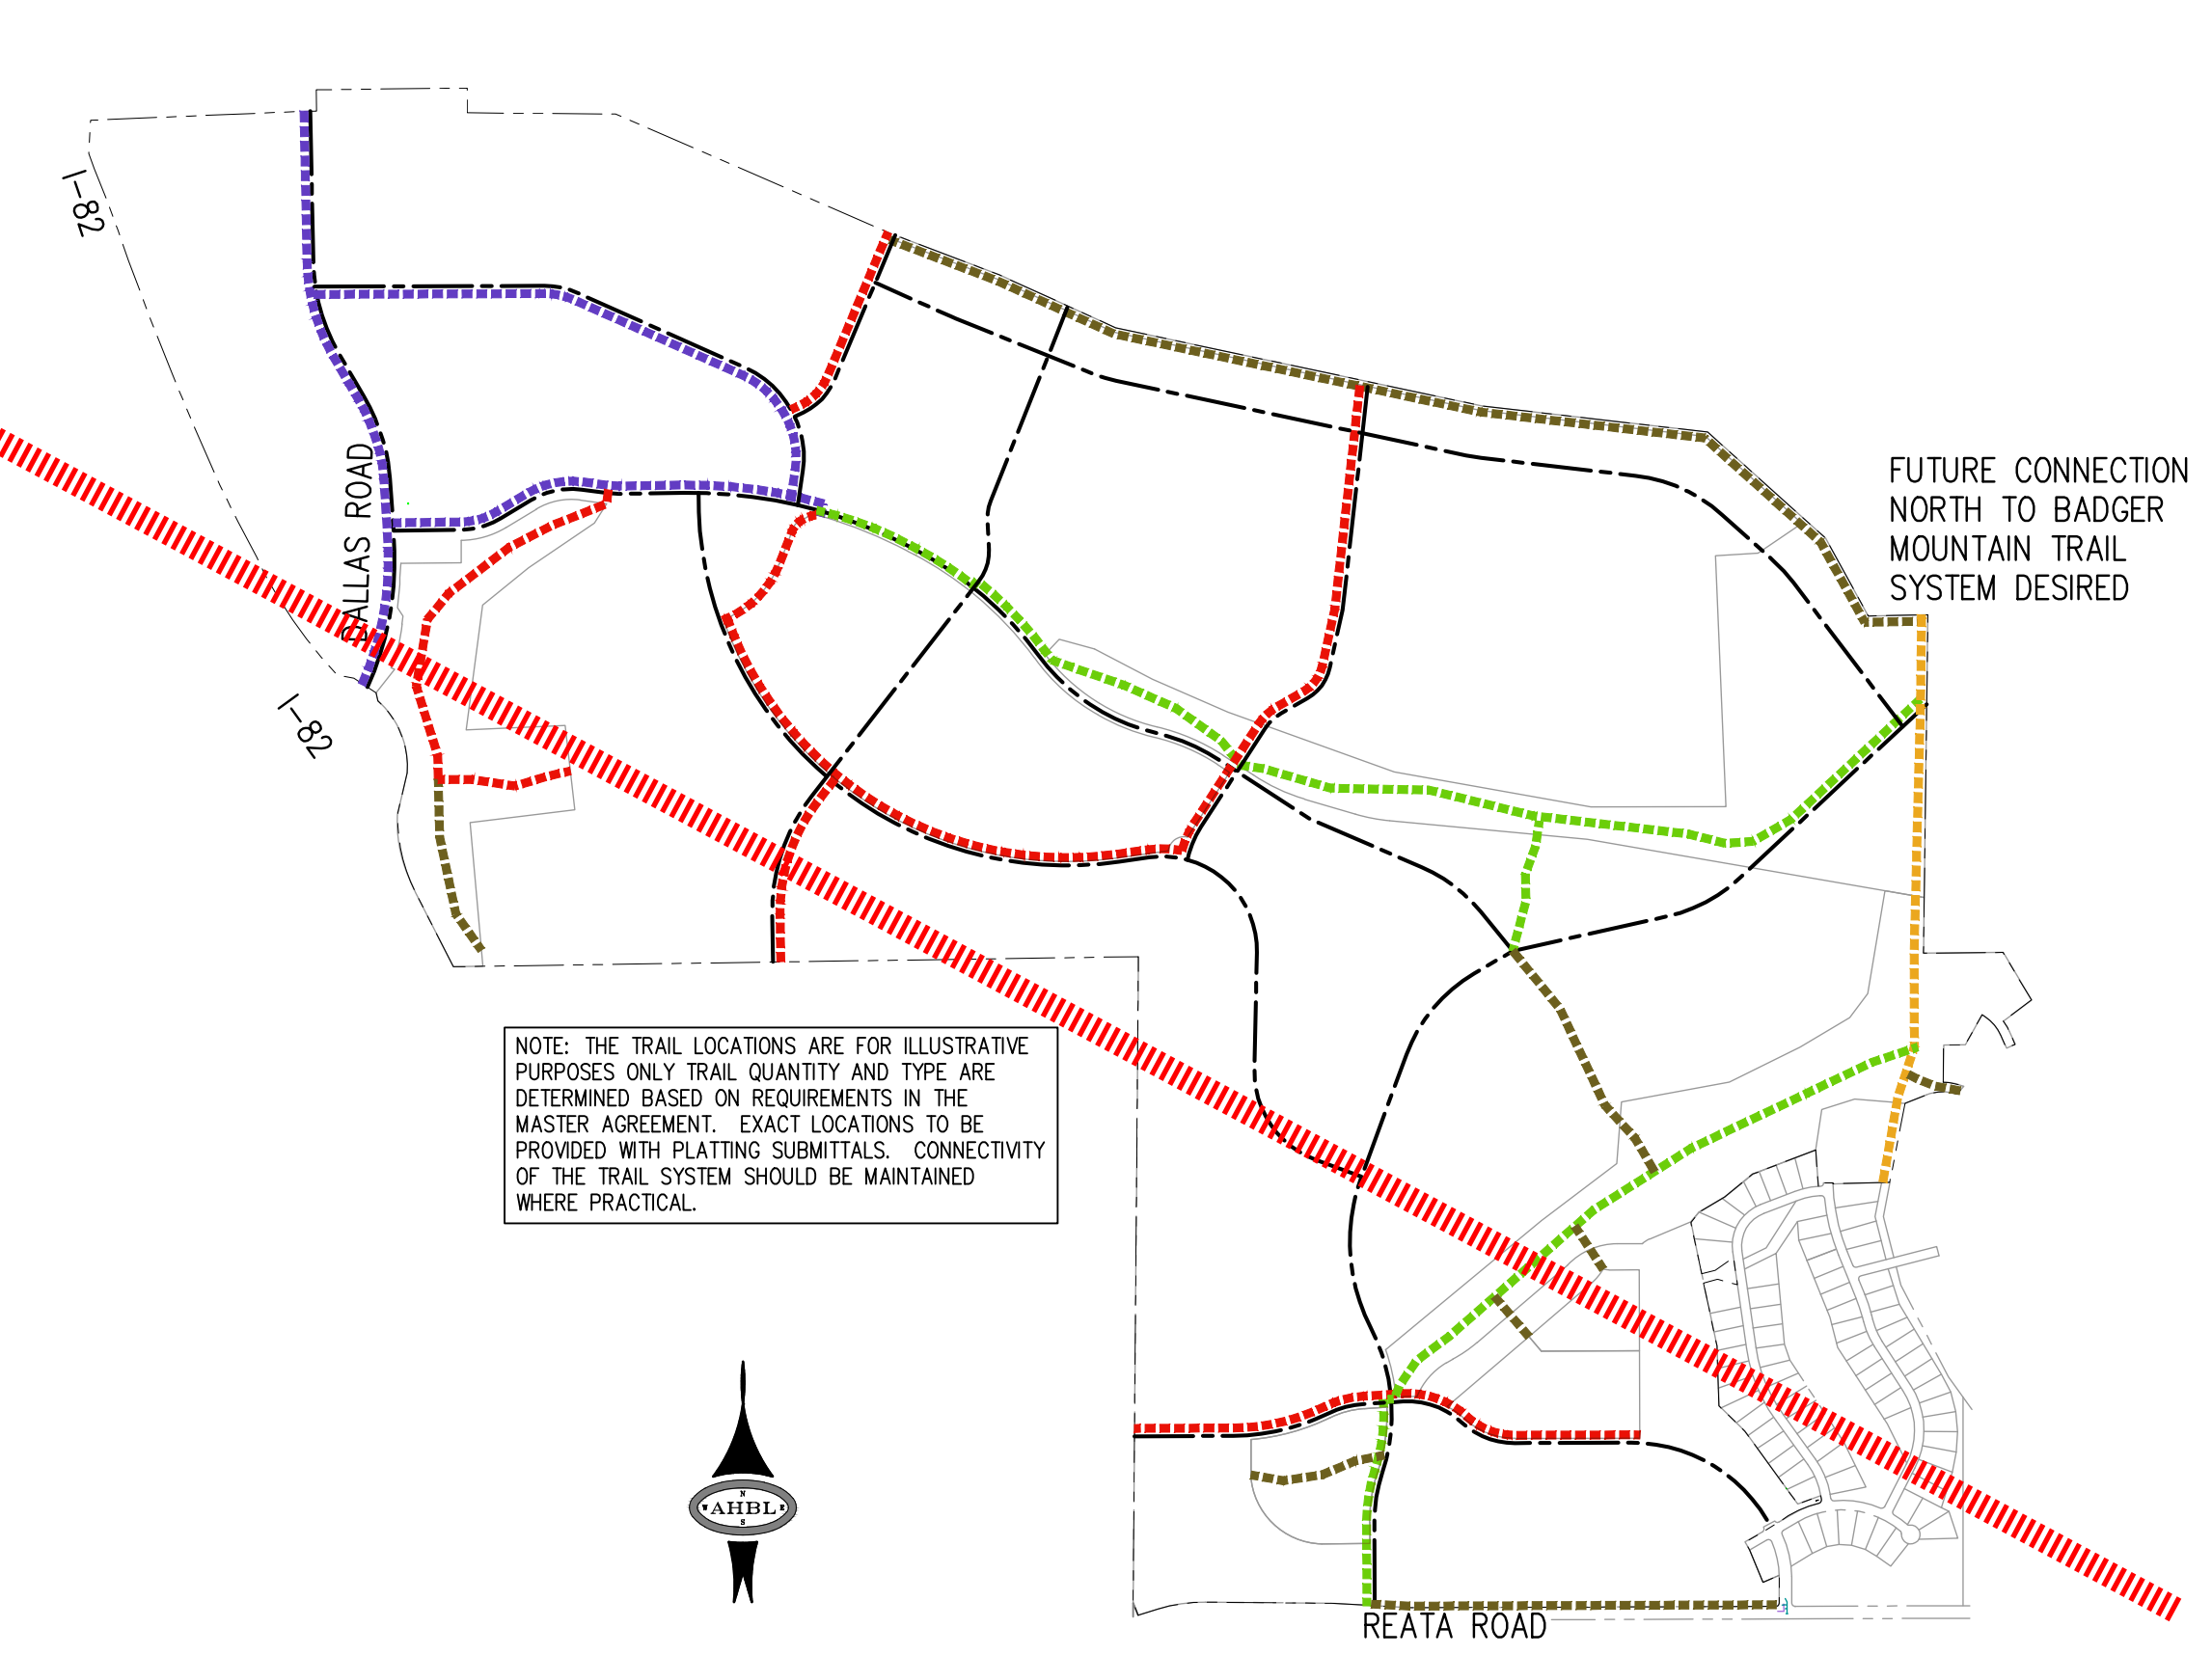

5.G TRAILS INTRODUCTION

The Illustrative Plan for Trail Layout and Trail Types identifies the location of the proposed trail system in Badger Mountain South. ~~Four~~ ^{Three} types of trails will be built within the community – Urban Trails located within the commercial centers, paved Primary and City Primary Trails for multi-uses, soft-surface Secondary Trails for walking and jogging, ~~and an Equestrian Trail connection located at the eastern edge of the community that will link to an existing equestrian trail.~~ At full buildout the project will include approximately 10 miles of trails and walking paths, and will provide


A fourth type of trail, Equestrian Trail, may be also constructed, at the discretion of the developer.

Two Trail Types are located in the Greenway Parks: City Primary Trails and Secondary Trails. These trails are intended to be the cross-community trail system that links all neighborhoods within Badger Mountain South. The City Primary Trail meanders within the Greenway Parks, sometimes near the adjoining streets, but primarily away from the streets and within the Greenway Park itself. Secondary Trails act as connector trails which link one side of the Greenway Park to the other or to the City Primary Trail.

TRAIL LEGEND

- CITY PRIMARY TRAIL
- PRIMARY TRAIL
- SECONDARY TRAIL
- EQUESTRIAN TRAIL (OPTIONAL)
- URBAN TRAIL

5.H ILLUSTRATIVE PLAN FOR TRAIL LAYOUT AND TRAIL TYPES

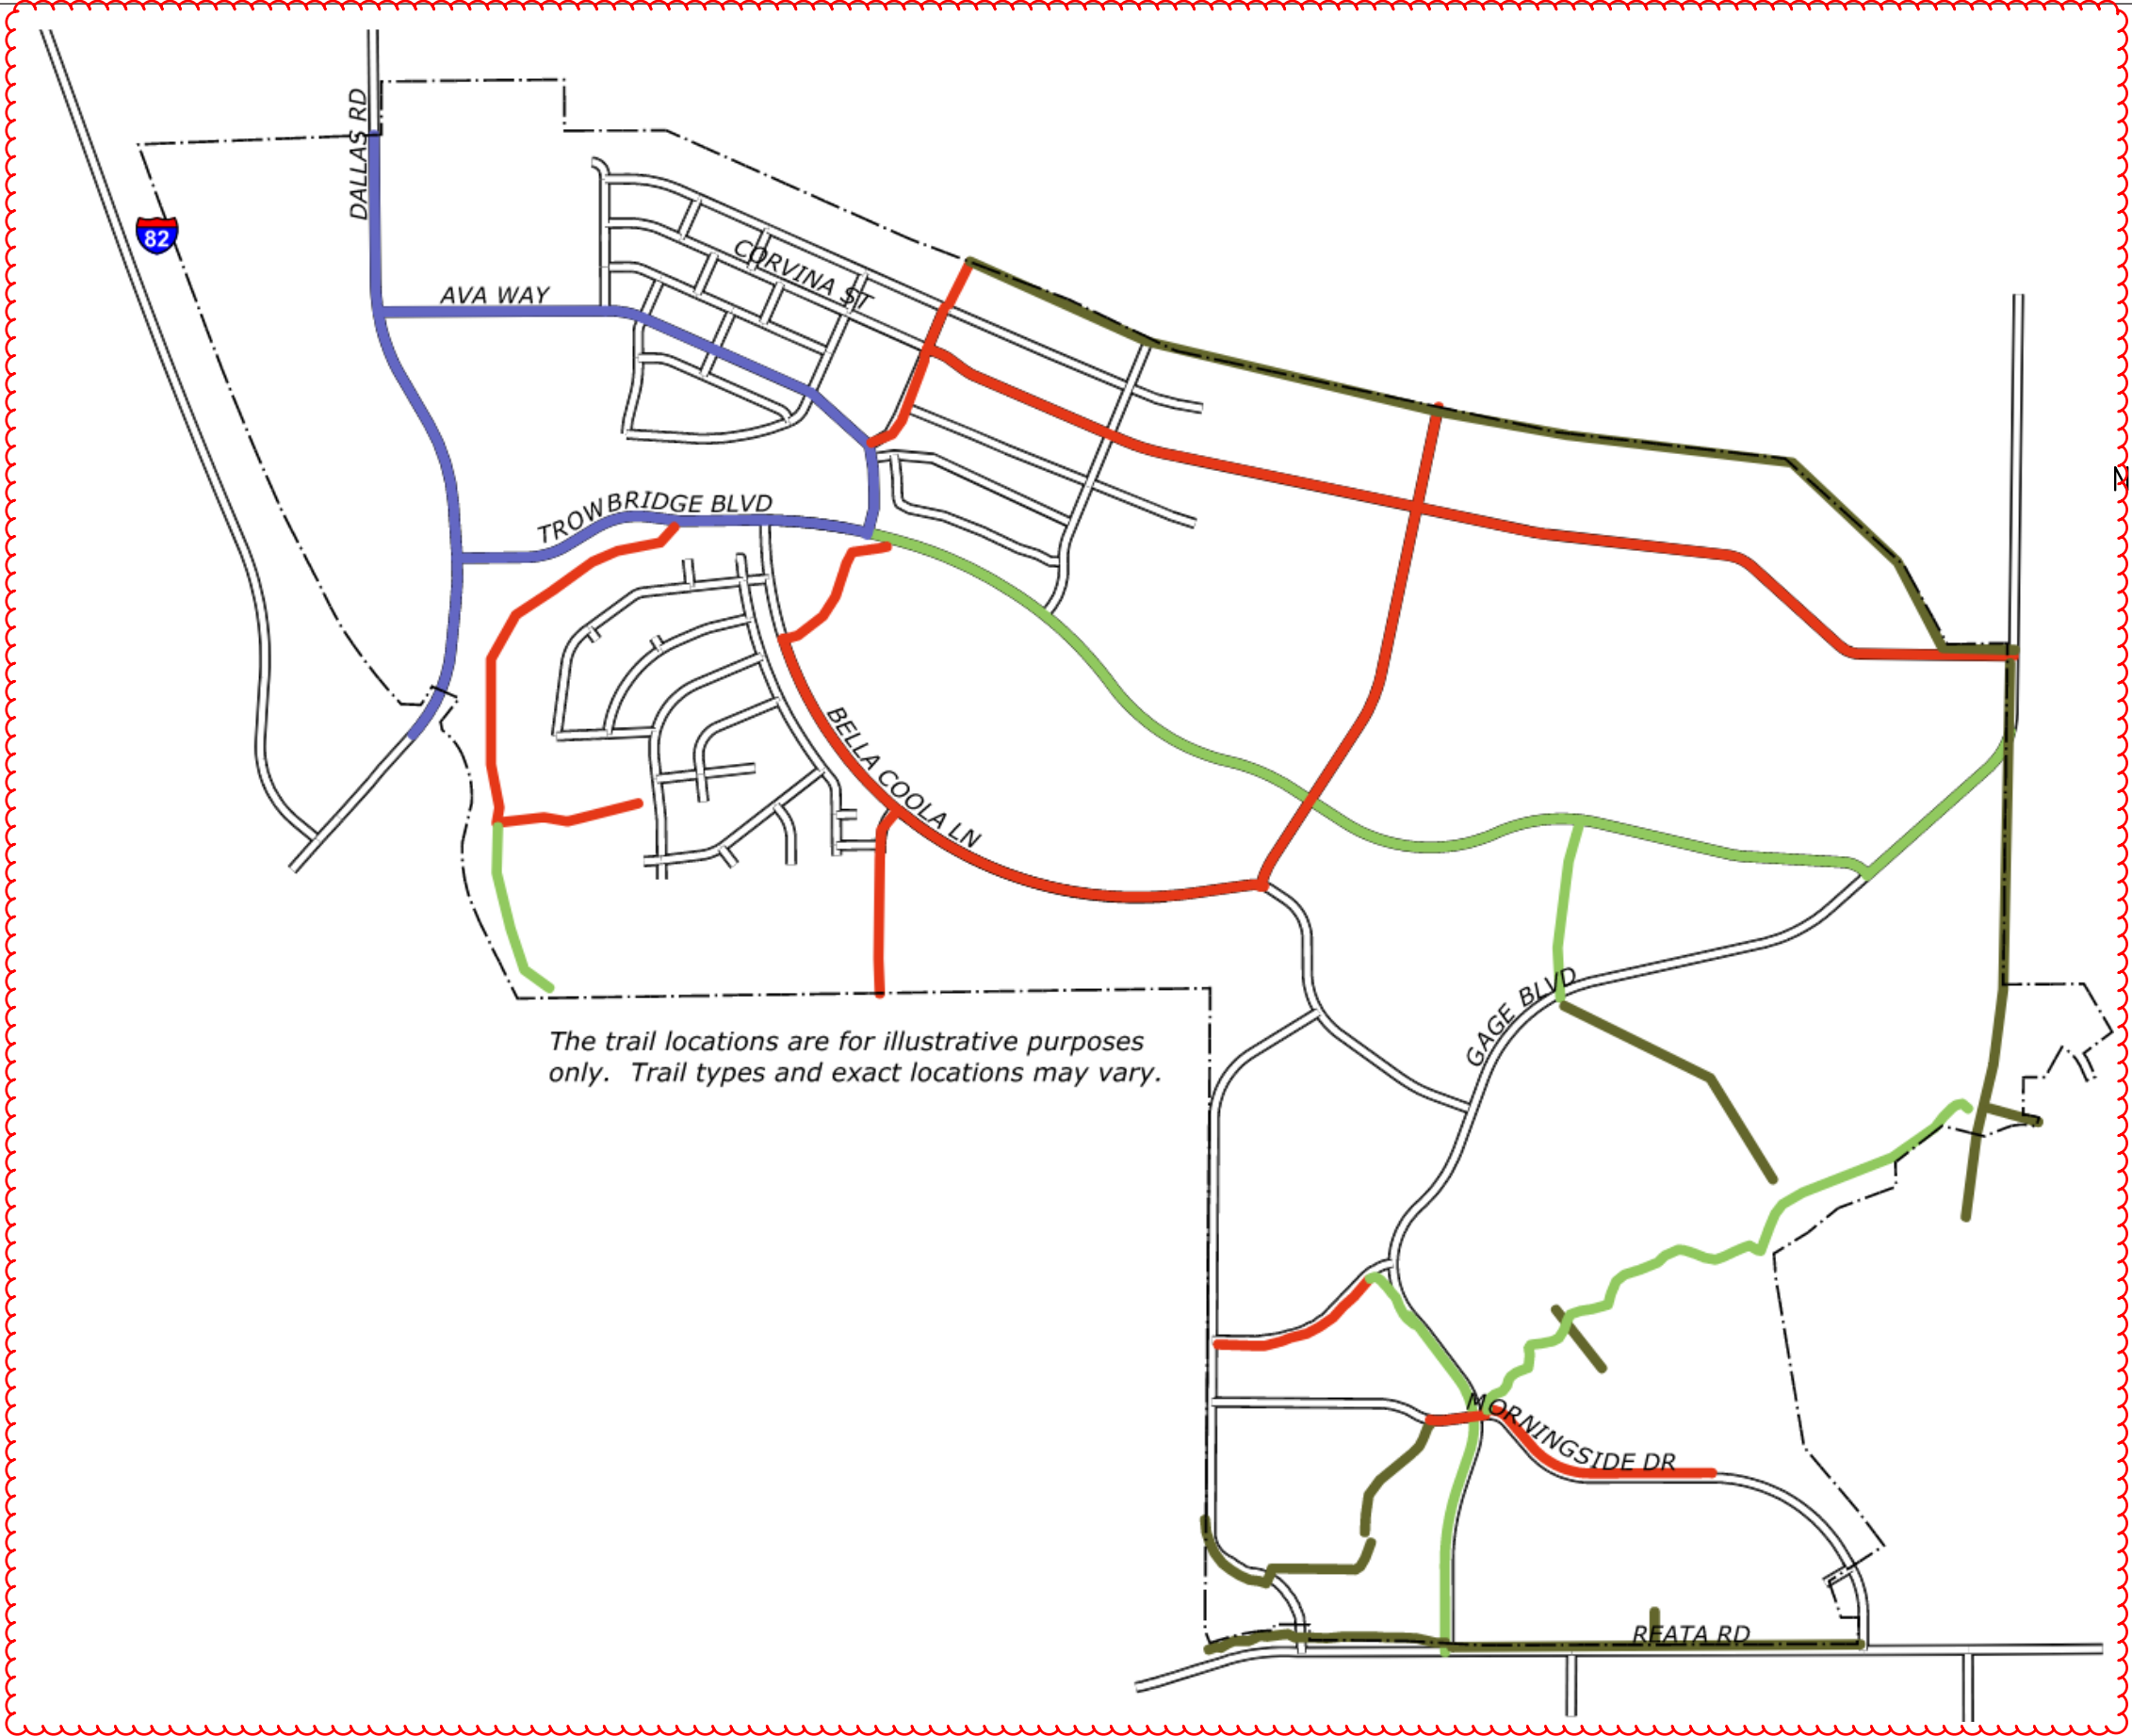


CHANGE POSITION
TO BE LEFT
ALIGNED

5.K


5.1 TRAILS



Illustrative Photo: Urban Trail

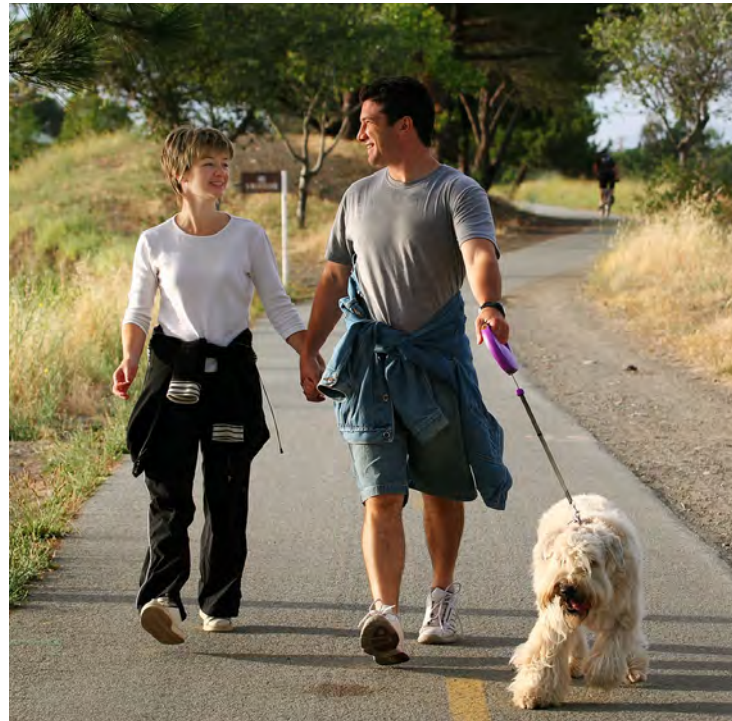


Illustrative Photo: Primary Trail

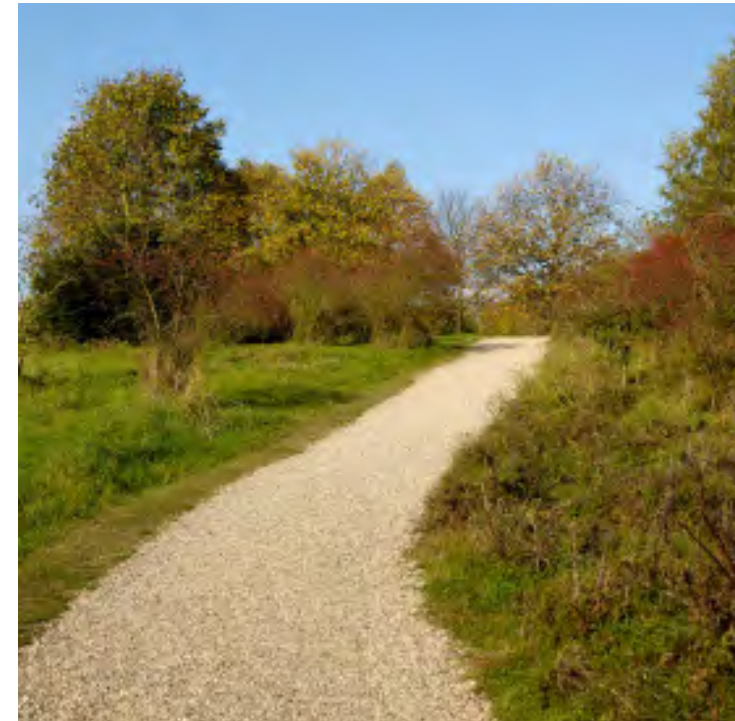

Illustrative Photo: Secondary Trail




Illustrative Photo: Equestrian Trail

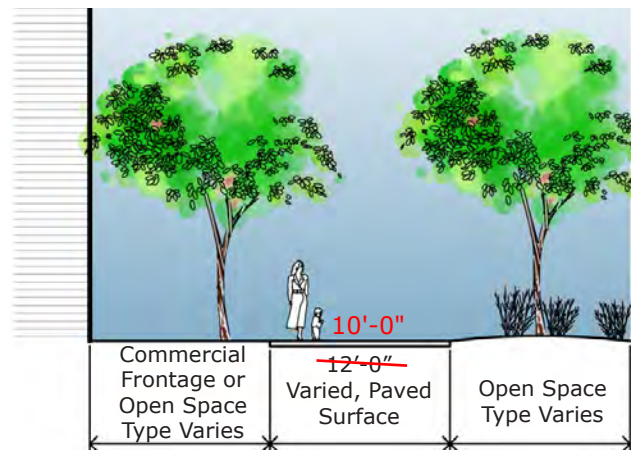

1. DESCRIPTION - URBAN TRAILS


- a. Definition** - Urban Trails will be located in the commercial, retail and mixed-use community Districts or adjacent to School Open Space and Public Parks. These trails may be integrated into the wide, paved plazas and sidewalk areas that serve these uses. The 10 ft. 12' Urban Trails will serve as a continuation of the community-wide bicycle and pedestrian trail system.
- b. Location** - Commercial, retail, and mixed-use areas in BMS-SD-SR, BMS-SD-CMU, and BMS-SD-DR Districts and limited location in BMS-CIVIC Districts; See 5.K, Illustrative Plan for Trail Layout and Trail Types. *update this*
- c. Size** *10 ft.*
- (1) Minimum width: ~~12 ft.~~ specialty paved surface.
- d. Standards**
- (1) Principally concrete but other paved surfaces permitted based on overall site design.
 - (2) Integrated into the commercial/retail plaza spaces.
 - (3) Will serve as a multi-use bicycle and pedestrian trail.
 - (4) Provide appropriate lighting for after-dark use which may be provided by street lighting located in the adjacent Right of Way.

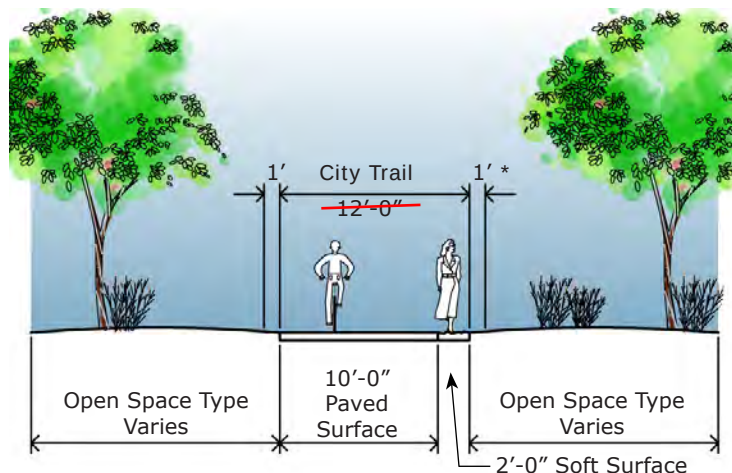

2. DESCRIPTION - PRIMARY TRAILS


- a. Definition** - Primary Trails will serve as a multi-modal system throughout the community. They are intended to foster connectivity, encourage healthy activities, and provide transportation options. When found adjacent to residential or other structures, the Primary Trail will be concrete and will also function as sidewalk in these areas. *update this*
- b. Location** - See 5.K, Illustr. Plan for Trail Layout and Trail Types.
- c. Size**
- (1) Minimum width: ~~12 ft.~~ 10 ft. concrete or asphalt surface with 2 ft. stabilized engineered wood fiber (SEWF), wood chips, or gravel shoulder on one side. *10 ft.*
 - (2) City Primary Trails width: ~~12 ft.~~ asphalt with 1 ft. gravel shoulder on both sides.
- d. Standards**
- (1) Provide sub-grade materials and preparation appropriate to the surfacing material.
 - (2) Provide appropriate lighting for after-dark use which may be provided by street lighting located in the adjacent Right of Way.
 - (3) Provide (1) 5-ft. recycled materials bench min. every 1/2 mile, per Section 13.C.4, except where the Greenbelt abuts single-family residential properties.

*City Trail Only

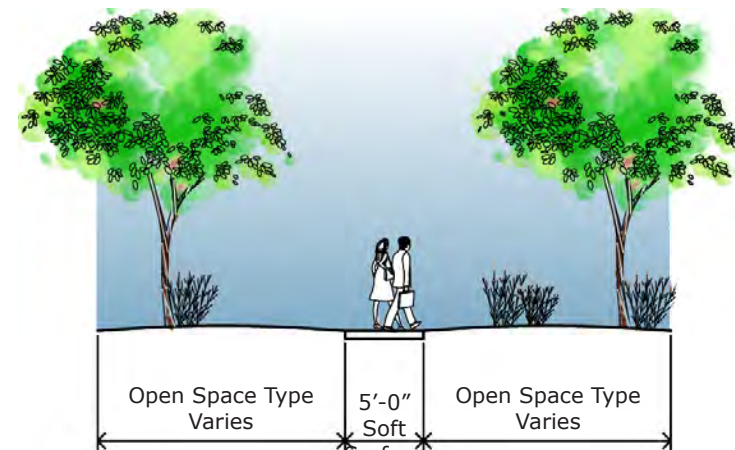

3. DESCRIPTION - SECONDARY TRAILS

- a. Definition** - Secondary Trails will be a informal, crushed gravel recreation trails for running, biking and walking. This trail system will link the Primary Trails to the major Greenway Parks and open spaces located throughout the community. *update this*
- b. Location** - See 5.K, Illustrative Plan for Trail Layout and Trail Types. *update this*
- c. Size**
- (1) Minimum width: 5 ft. stabilized engineered wood fiber (SEWF), wood chips, or gravel.
- d. Standards**
- (1) Provide compacted sub-grade.
 - (2) Will serve as a pedestrian trail.

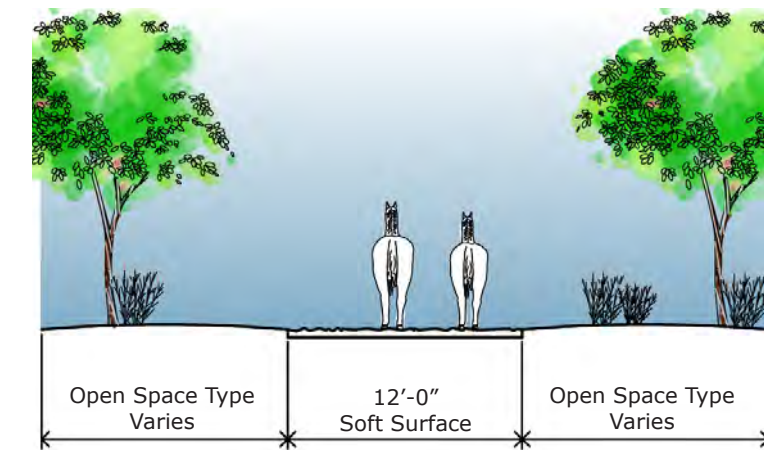

4. DESCRIPTION - EQUESTRIAN TRAILS

- a. Definition** - The Equestrian Trail will be a soft-surface recreation trail designed for horseback riding. This trail will traverse along the eastern boundary and provide linkage from the existing trail at the southeast corner to the northeast corner of the property. *update this*
- b. Location** - Eastern Boundary; See 5.K, Illustrative Plan for Trail Layout and Trail Types. *update this*
- c. Size**
- (1) Minimum width: 12 ft. engineered wood fiber (EWF), wood chips, or gravel. *or*
- d. Standards** *(2) varied surface, 10' min. (12' section)*
- (1) Provide compacted sub-grade.



STREET STANDARDS

6

Section 6 describes regulations for street layout and circulation throughout the Badger Mountain South community.

The Street Standards Section includes a Regulating Plan for Streets that maps out the street and Edge Types for the Badger Mountain South community.


6.A	Introduction	6-2
6.B	Regulating Plan for Streets.....	6-2
6.C	4-Lane Arterial Collector Street.....	6-3
6.D	2-Lane Arterial Collector Street.....	6-3
6.E	Collector Street.....	6-4
6.F	16 ft. Local Street.....	6-4
6.F.1	ALTERNATE - 12 ft. Local Street.....	6-5
6.G	Rear Alley.....	6-5
6.H	Roundabout.....	6-6

6.A INTRODUCTION

Section 6 identifies the street layout for the arterial collectors, the proposed layout for the internal collector streets and the right-of-way standards for each street type in the Badger Mountain South community.

Section 6 also introduces the concept of “edge types” which are the pedestrian and landscape elements within the right-of-way. An edge type will be one of four styles that vary based on the adjoining land use. Any street may have different edge types if the land uses on either side of the street are different or if one side of the street is an element of the identified trail system. The standards for each street and edge type are identified in Sections 6.C. through 6.F. Note that collector street section widths may be increased when needed to manage higher traffic volumes. Internal site access ways are permitted subject to City review for adequate emergency and refuse collection access.

6.B REGULATING PLAN FOR STREETS

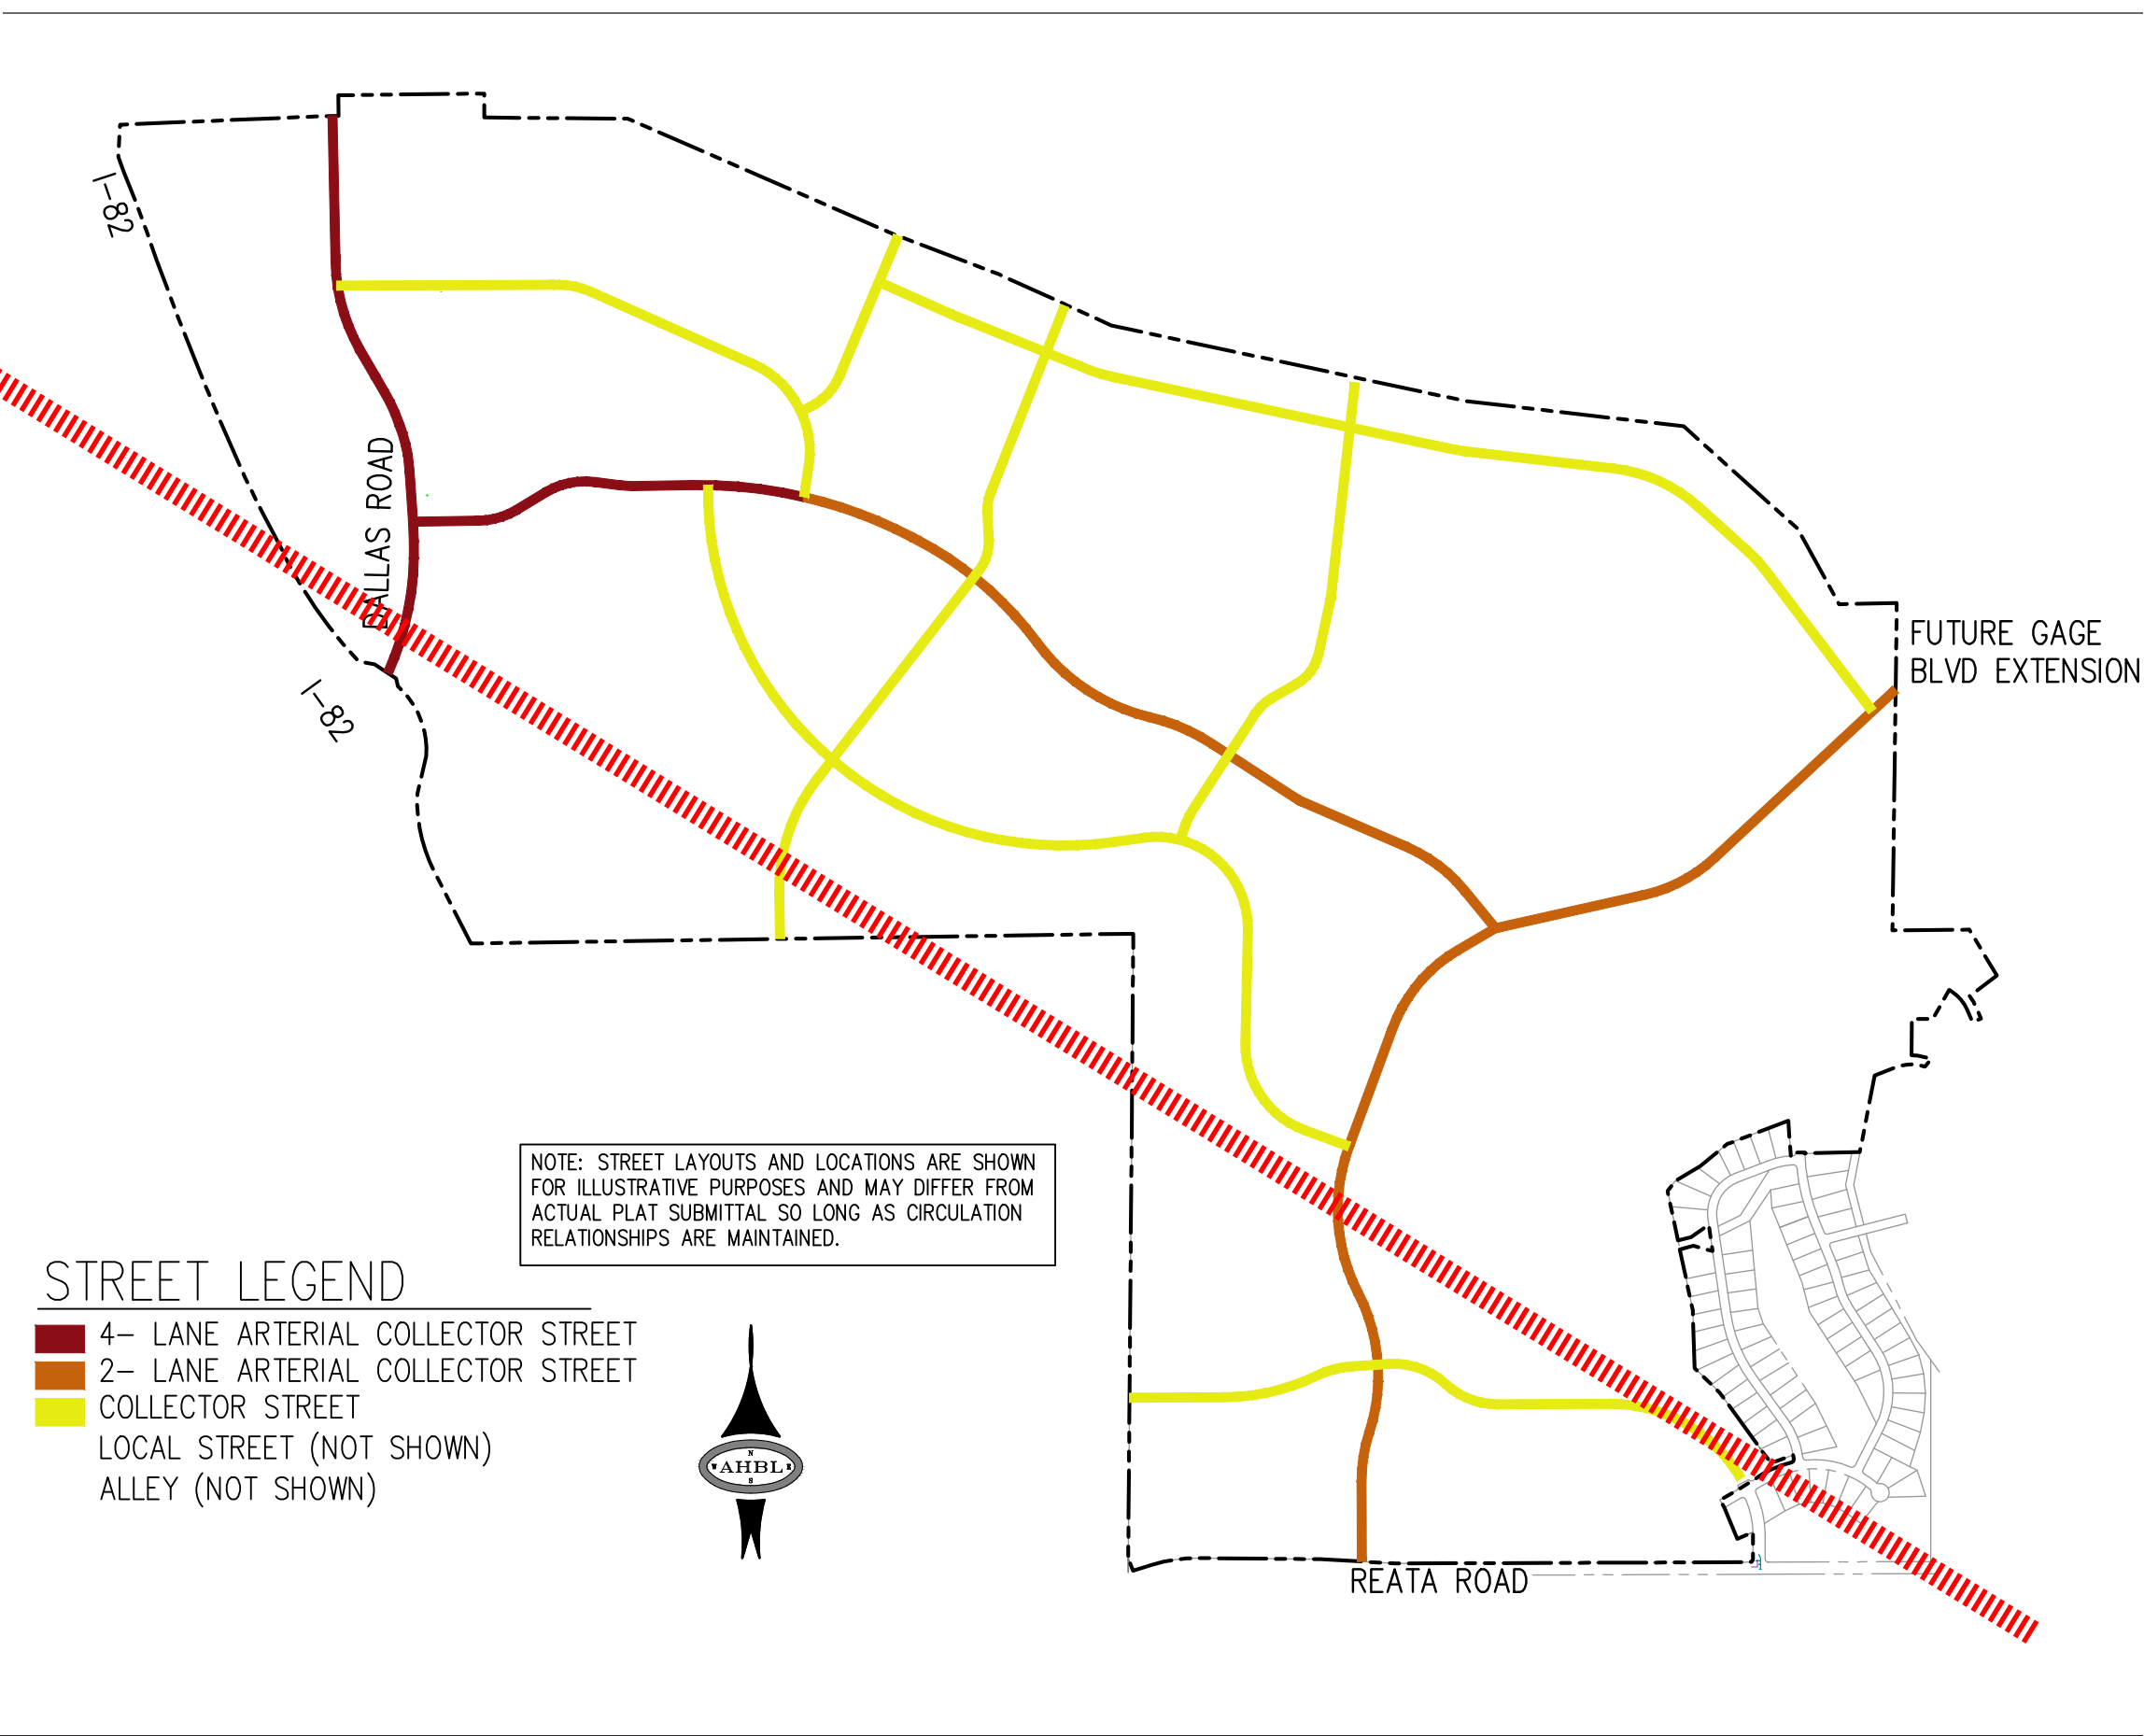

6.A INTRODUCTION

Section 6 identifies the street layout for the ~~arterial collectors~~ ^{street system}, the proposed layout for the internal collector streets and the right-of-way standards for each street type in the Badger Mountain South community.

Section 6 also ~~introduces the concept of~~ ^{details} "edge types" which are the pedestrian and landscape elements within the right-of-way. An edge type will be one of four styles that vary based on the adjoining land use. Any street may have different edge types if the land uses on either side of the street are different or if one side of the street is an element of the identified trail system. The standards for each street and edge type are identified in Sections 6.C. through 6.F. Note that collector street section widths may be increased when needed to manage higher traffic volumes. Internal site access ways are permitted subject to City review for adequate emergency and refuse collection access.

STREET LEGEND


- I-82
- I-82 Ramp
- 5 Lane Minor Arterial
- 3 Lane Minor Arterial ^
- Major Collector ^
- Minor Collector ^
- Local Road * ^
- Alley or Private Acces Rd

^Future roadways are shown with a white hash line, are subject to change *Not all shown

EDGE TYPE LEGEND


- Undetermined
- Edge Type A
- Edge Type B
- Edge Type C
- Edge Type D

6.B REGULATING PLAN FOR STREETS

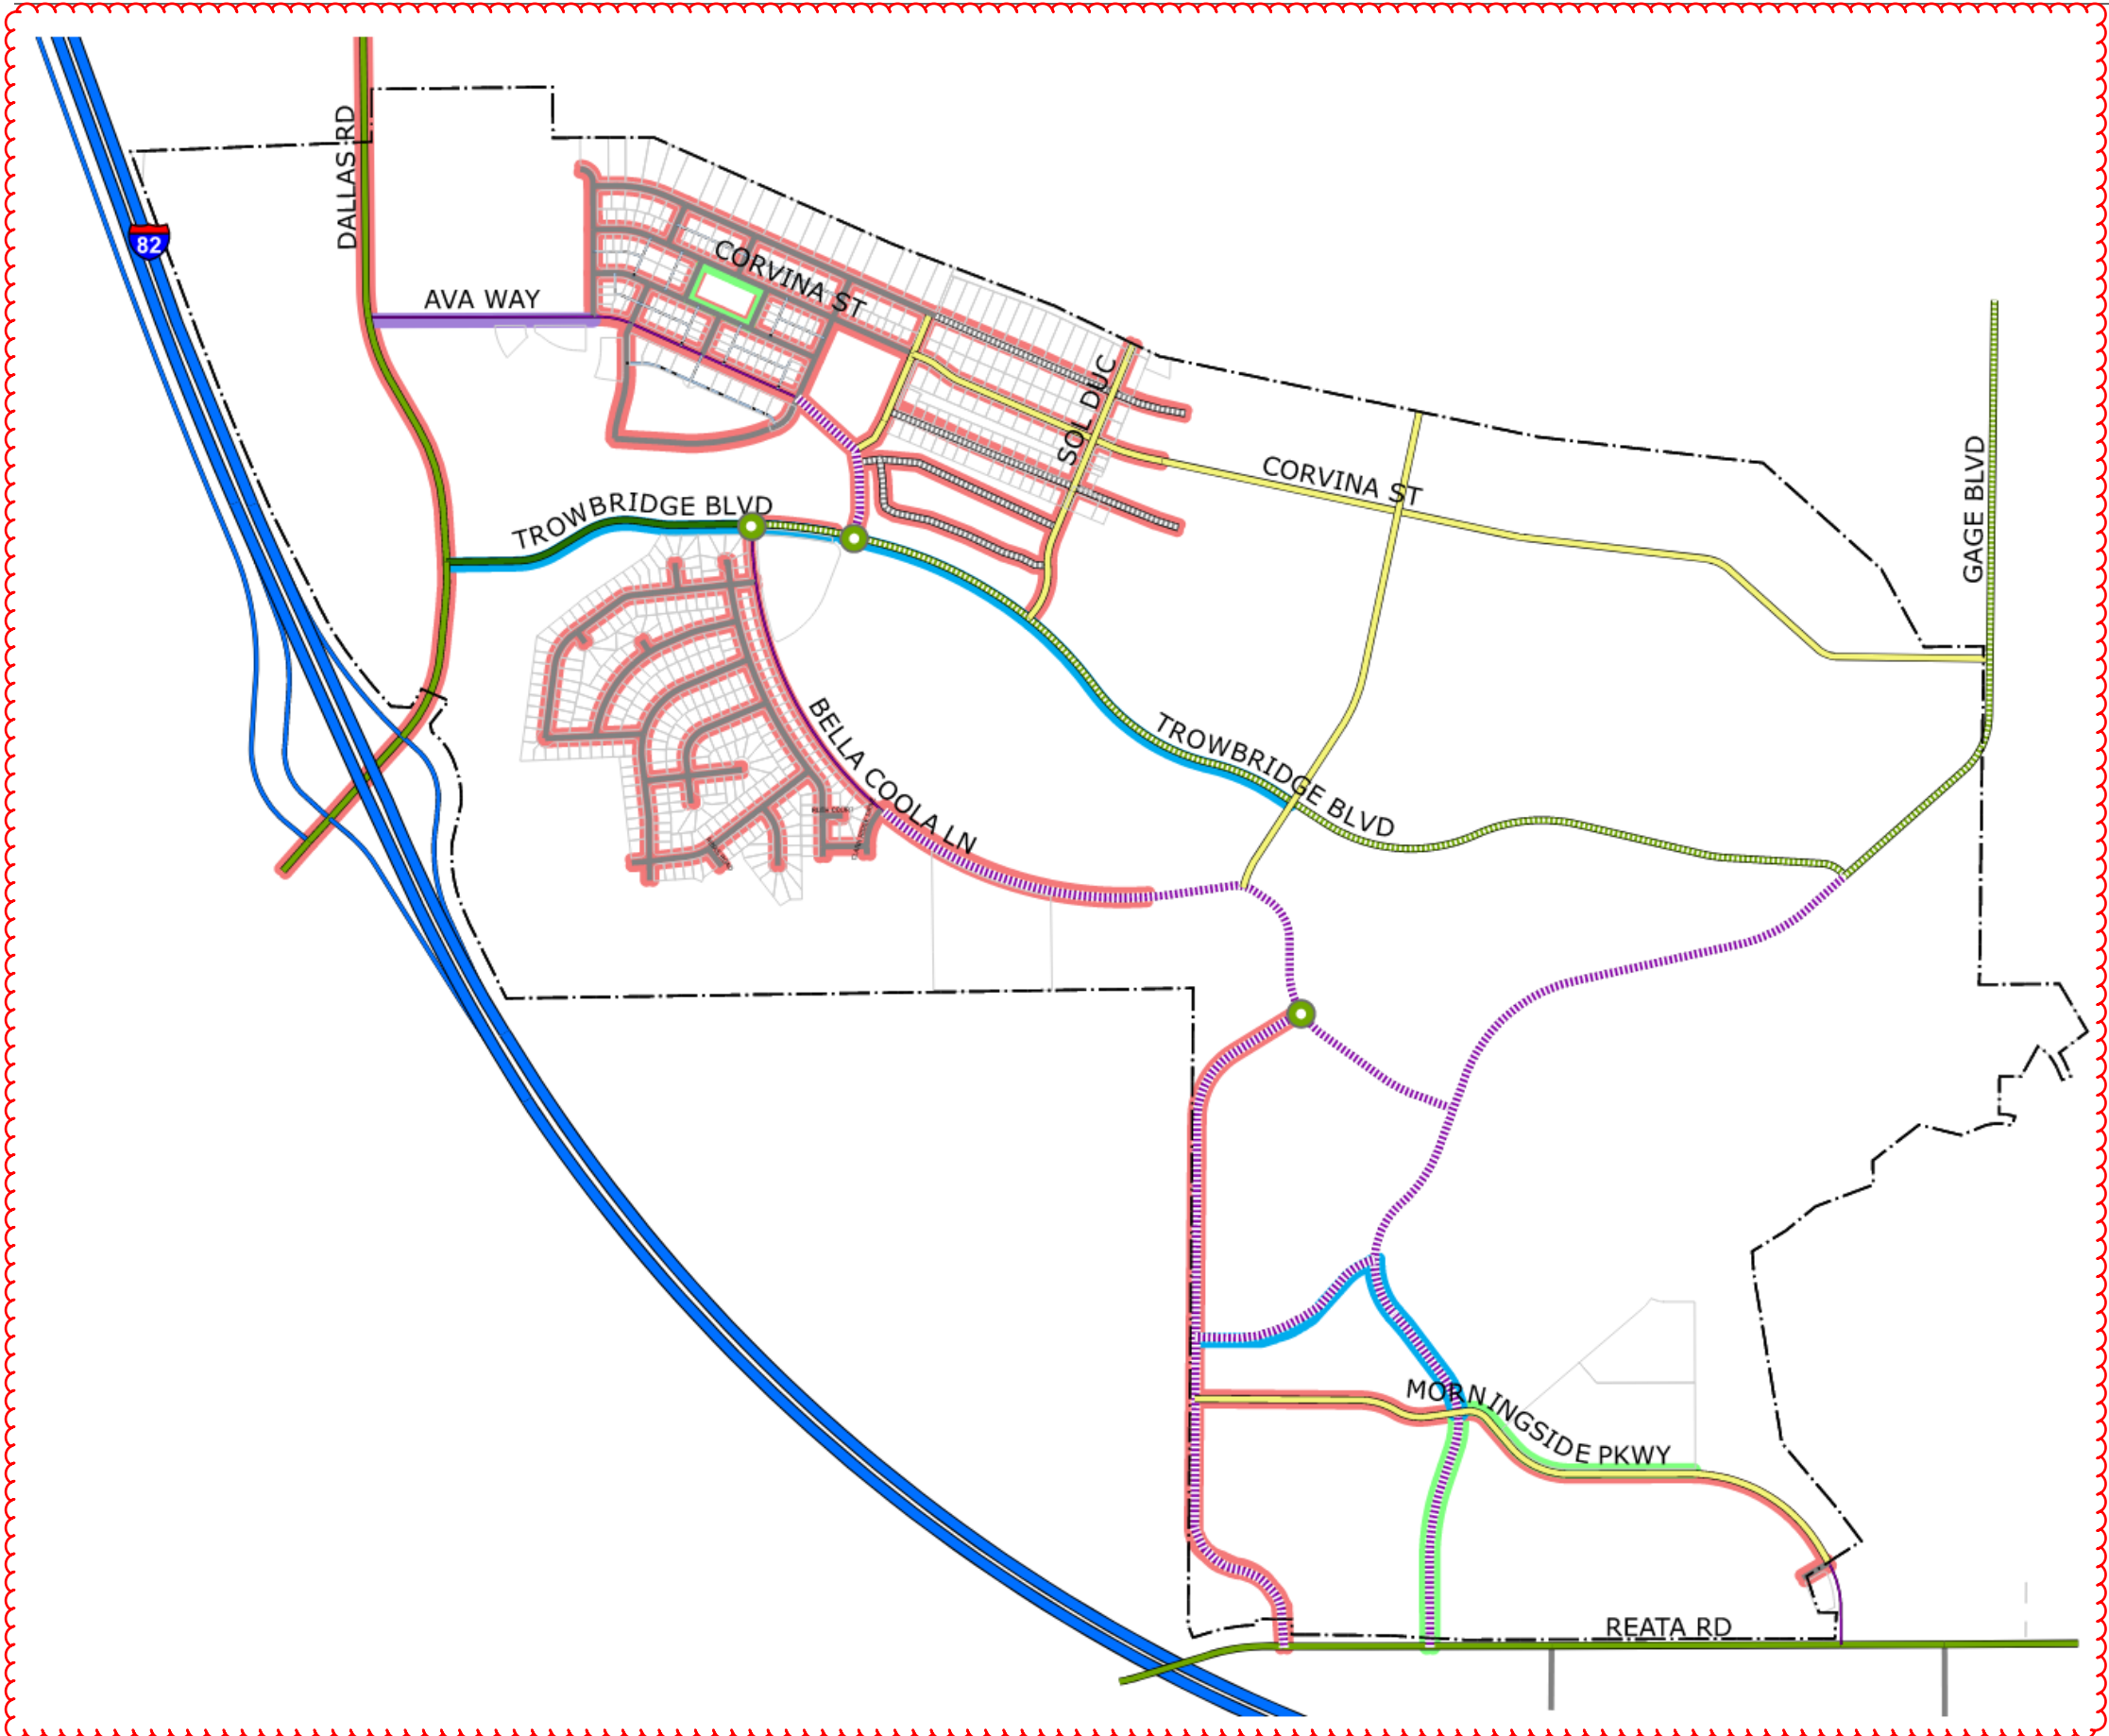


6B.1 EDGE TYPES

6B.1A EDGE TYPE A

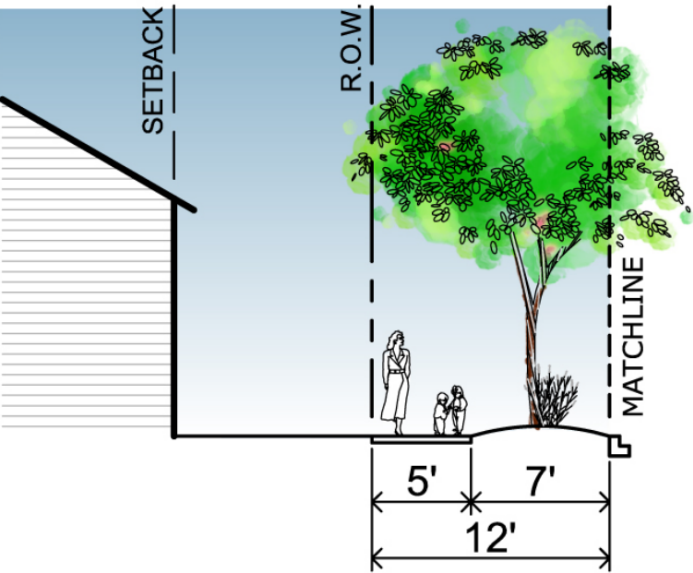


KEY	
	See 6.B Regulating Plan For Streets
EDGES	
Curb Type	Curb
Planter Type	7 ft. Continuous
Landscape Type	Medium Trees @ 30 ft. O.C. Average
Walkway Type	5 ft. Sidewalks
Frontage Type	Residential Dwelling Units

6B.1B EDGE TYPE B

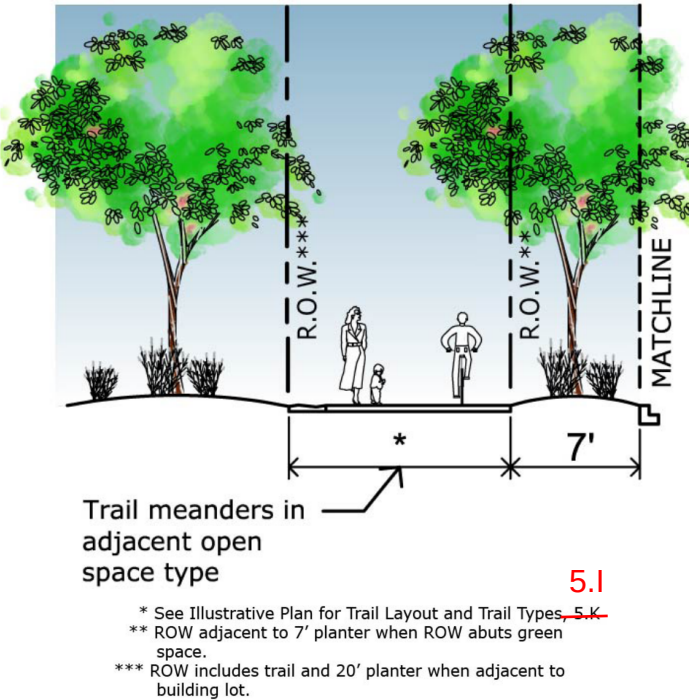


KEY	
	See 6.B Regulating Plan For Streets
EDGES	
Curb Type	Curb
Planter Type	7 ft. continuous when adjacent to green space and 20 ft. continuous when adjacent to building lot; May also utilize planter beds or tree grates along Urban Trail or Plaza frontages
Landscape Type	Tree and Spacing Varies
Walkway Type	Meandering Trail in adjacent open space type, or, 8 ft Trail when 20 ft Greenbelt Condition applies
Frontage Type	Greenbelt or Open Space

6B.1C EDGE TYPE C

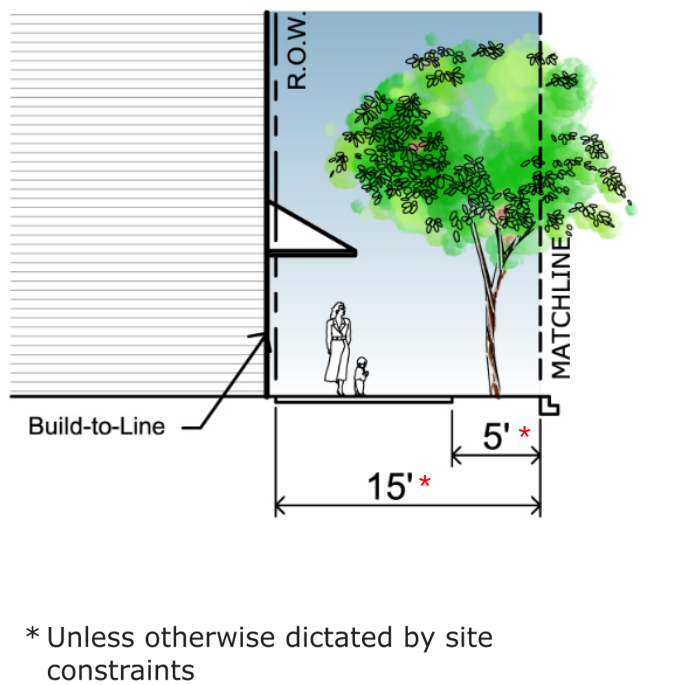

KEY	
	See 6.B Regulating Plan For Streets
EDGES	
Curb Type	Curb
Planter Type *	5 ft. Tree Grate
Landscape Type	Small/Medium Trees @ 25 ft. O.C. Average
Walkway Type *	15 ft. Sidewalks
Frontage Type	Commercial / Multi-family Residential


6B.1D EDGE TYPE D

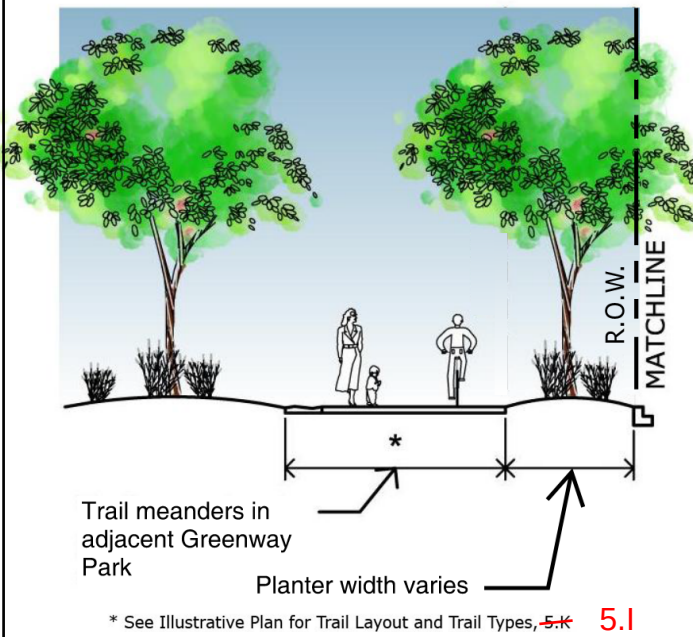

KEY	
	See 6.B Regulating Plan For Streets
EDGES	
Curb Type	Curb
Planter Type	Irregular spaced groupings of plant materials
Landscape Type	Principally evergreen trees and other plantings
Walkway Type	Meandering Trail in adjacent Greenway Park
Frontage Type	Open Space


SEE FOLLOWING PAGE FOR PROPOSED CHANGES.

6.C 4-LANE ARTERIAL COLLECTOR STREET

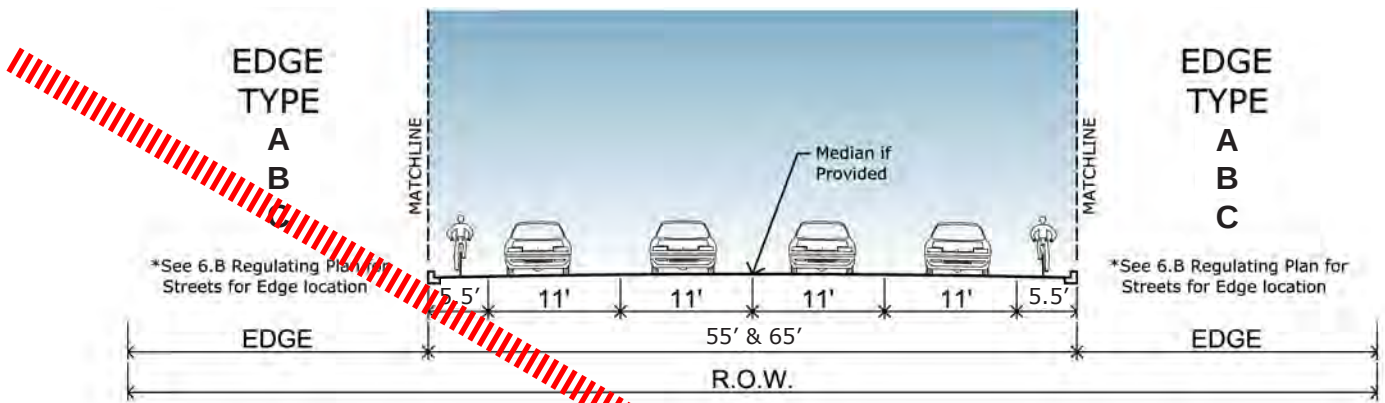


KEY	LANES
See 6.B Regulating Plan For Streets	Traffic 11 ft.
	Bicycle 5.5 ft.
	Parking None
	Median (Where shown on 6.B) add 10 ft.
APPLICATION	INTERSECTIONS
Thoroughfare Type 4-Lane Arterial Collector	Curb Radius 20 ft mimum
Design Speed 35 mph	
Posted Speed 35 mph	
Pedestrian Crossing Time 14.3 Sec.	

OVERALL WIDTHS
Pavement Width 55 ft.
Total R.O.W. Edge + 54 ft.(+median, if provided)+ Edge
See totals by Edge Type below

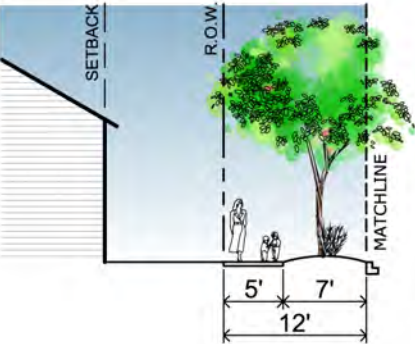


EDGE TYPE A

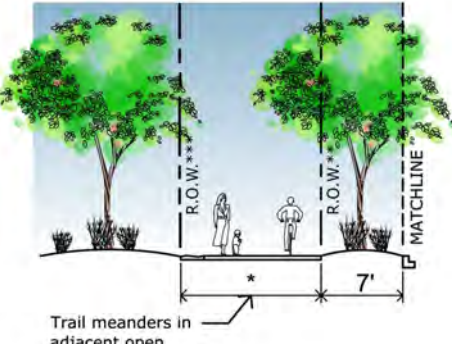

EDGE TYPE B

* See Illustrative Plan for Trail Layout and Trail Types, 5.K
** ROW adjacent to 7' planter when ROW abuts green space.
*** ROW includes trail and 20' planter when adjacent to building lot.

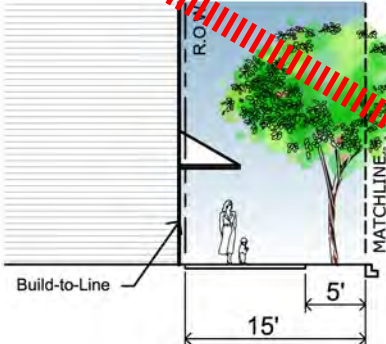

EDGE TYPE C


* Unless otherwise dictated by site constraints

KEY	EDGES
See 6.B Regulating Plan For Streets	Curb Type Curb
	Planter Type 7 ft. Continuous
	Landscape Type Medium Trees @ 30 ft. O.C. Average
	Walkway Type 5 ft. Sidewalks
	Frontage Type Residential Dwelling Units
1/2 R.O.W.	28 ft.
R.O.W. - Edge 'A' Both Sides	56 ft.
R.O.W. - Edge 'A' + Edge 'B'	51 ft.

KEY	EDGES
See 6.B Regulating Plan For Streets	Curb Type Curb
	Planter Type 7 ft. continuous when adjacent to green space and 20 ft. continuous when adjacent to building lot; May also utilize planter beds or tree grates along Urban Trail or Plaza frontages
	Landscape Type Tree and Spacing Varies
	Walkway Type Meandering Trail in adjacent open space type, or, 8 ft Trail when 20 ft Greenbelt Condition applies
	Frontage Type Greenbelt or Open Space
1/2 R.O.W.	26 / 51 ft.
R.O.W. - Edge 'B' Both Sides	52 / 102 ft.
R.O.W. - Edge 'B' + Edge 'A'	57 / 82 ft.
R.O.W. - Edge 'B' + Edge 'C'	60 / 85 ft.


KEY	EDGES
See 6.B Regulating Plan For Streets	Curb Type Curb
	Planter Type 5 ft. Tree Grate
	Landscape Type Small/Medium Trees @ 25 ft. O.C. Average
	Walkway Type 15 ft. Sidewalks
	Frontage Type Commercial / Multi-family Residential
1/2 R.O.W.	42 ft.
R.O.W. - Edge 'C' Both Sides	84 ft.
R.O.W. - Edge 'C' + Edge 'B'	76 ft.

6.D 2-LANE ARTERIAL COLLECTOR STREET

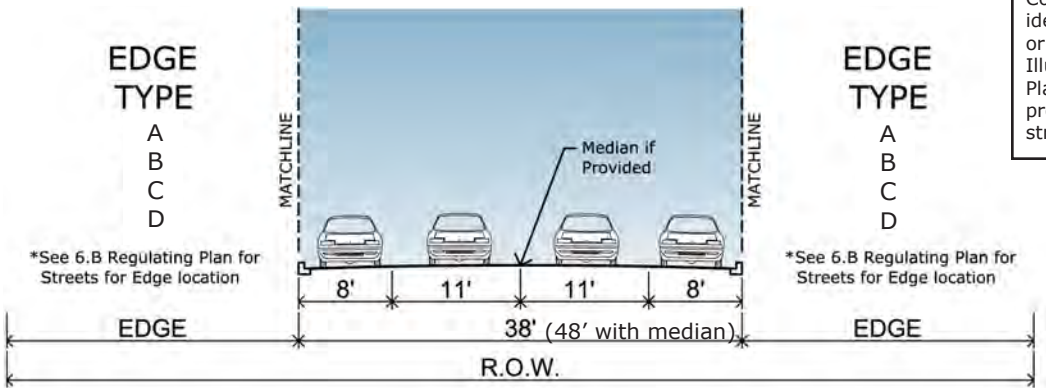


KEY	
	See 6.B Regulating Plan For Streets
APPLICATION	
Thoroughfare Type	2-Lane Arterial Collector
Design Speed	35 mph
Posted Speed	25 mph
Pedestrian Crossing Time	6.3 Sec.
OVERALL WIDTHS	
Pavement Width	38 ft.
Total R.O.W.	Edge + 38 ft.(+median, if provided)+ Edge
	See totals by Edge Type below

LANES		
Traffic		11 ft.
Parking		8 ft.
Median	(Where shown on 6.B)	add 10 ft.
Greenbelt Median (5.H)	(See 5.B for locations)	add 60 ft.
INTERSECTIONS		
Curb Radius		20 ft. minimum




EDGE TYPE A




EDGE TYPE B

* See Illustrative Plan for Trail Layout and Trail Types, 5.K
** ROW adjacent to 7' planter when ROW abuts green space.
*** ROW includes trail and 20' planter when adjacent to building lot.



EDGE TYPE C

* Unless otherwise dictated by site constraints



EDGE TYPE D

KEY	EDGES
See 6.B Regulating Plan For Streets	Curb Type Curb
	Planter Type 7 ft. continuous when adjacent to green space and 20 ft. continuous when adjacent to building lot; May also utilize planter beds or tree grates along Urban Trail or Plaza frontages
	Landscape Type Tree and Spacing Varies
	Walkway Type Meandering Trail in adjacent open space type, or, 8 ft Trail when 20 ft Greenbelt Condition applies
	Frontage Type Greenbelt or Open Space
1/2 R.O.W.	31 ft.
R.O.W. - Edge 'A' Both Sides	62 ft.
R.O.W. - Edge 'A' + Edge 'B'	57 ft.
R.O.W. - Edge 'A' + Edge 'C'	65 ft.


KEY	EDGES
See 6.B Regulating Plan For Streets	Curb Type Curb
	Planter Type 7 ft. continuous when adjacent to green space and 20 ft. continuous when adjacent to building lot; May also utilize planter beds or tree grates along Urban Trail or Plaza frontages
	Landscape Type Tree and Spacing Varies
	Walkway Type Meandering Trail in adjacent open space type, or, 8 ft Trail when 20 ft Greenbelt Condition applies
	Frontage Type Greenbelt or Open Space
1/2 R.O.W.	26 / 51 ft.
R.O.W. - Edge 'B' Both Sides	52 / 102 ft.
R.O.W. - Edge 'B' + Edge 'A'	57 / 82 ft.
R.O.W. - Edge 'B' + Edge 'C'	60 / 85 ft.

KEY	EDGES
See 6.B Regulating Plan For Streets	Curb Type Curb
	Planter Type 5 ft. Tree Grate
	Landscape Type Small/Medium Trees @ 25 ft. O.C. Average
	Walkway Type 5 ft. Sidewalks
	Frontage Type Commercial / Multi-family Residential
1/2 R.O.W.	34 ft.
R.O.W. - Edge 'C' Both Sides	68 ft.
R.O.W. - Edge 'C' + Edge 'A'	65 ft.
R.O.W. - Edge 'C' + Edge 'B'	60 ft.

KEY	EDGES
See 6.B Regulating Plan For Streets	Curb Type Curb
	Planter Type Irregular spaced groupings of plant materials
	Landscape Type Principally evergreen trees and other plantings
	Walkway Type Meandering Trail in adjacent Greenway Park
	Frontage Type Open Space
1/2 R.O.W.	19 ft.
R.O.W. - Edge 'D' + Edge 'A'	50 ft.
R.O.W. - Edge 'D' + Edge 'B'	70 ft.

PROPOSED AMENDMENTS ARE SHOWN:

6.C 4-LANE ARTERIAL COLLECTOR STREET

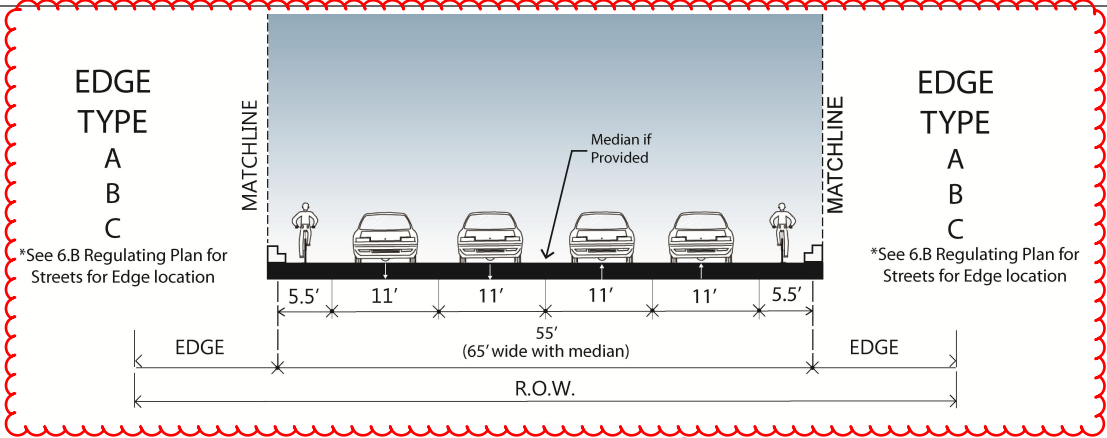

APPLICATION

Thoroughfare Type	4-Lane Arterial Collector
Design Speed	35 mph
Posted Speed	35 mph
Pedestrian Crossing Time	14.3 Sec.

OVERALL WIDTHS

Pavement Width	55 ft.
Total R.O.W.	Edge + 54 ft.(+median, if provided)+ Edge
See totals by Edge Type below	

EDGE TYPE A WIDTHS

1/2 R.O.W.	28 ft.
R.O.W. - Edge 'A' Both Sides	56 ft.
R.O.W. - Edge 'A' + Edge 'B'	51 ft.

EDGE TYPE B WIDTHS

1/2 R.O.W.	26 / 51 ft.
R.O.W. - Edge 'B' Both Sides	52 / 102 ft.
R.O.W. - Edge 'B' + Edge 'A'	57 / 82 ft.
R.O.W. - Edge 'B' + Edge 'C'	60 / 85 ft.

EDGE TYPE C WIDTHS

1/2 R.O.W.	42 ft.
R.O.W. - Edge 'C' Both Sides	84 ft.
R.O.W. - Edge 'C' + Edge 'B'	76 ft.


LANES

Traffic	11 ft.
Bicycle	5.5 ft.
Parking	None
Median (Where shown on 6.B)	add 10 ft.

INTERSECTIONS

Curb Radius	20 ft mimum
-------------	-------------

3- LANE MINOR ARTERIAL
~~6.D 2-LANE ARTERIAL COLLECTOR STREET~~

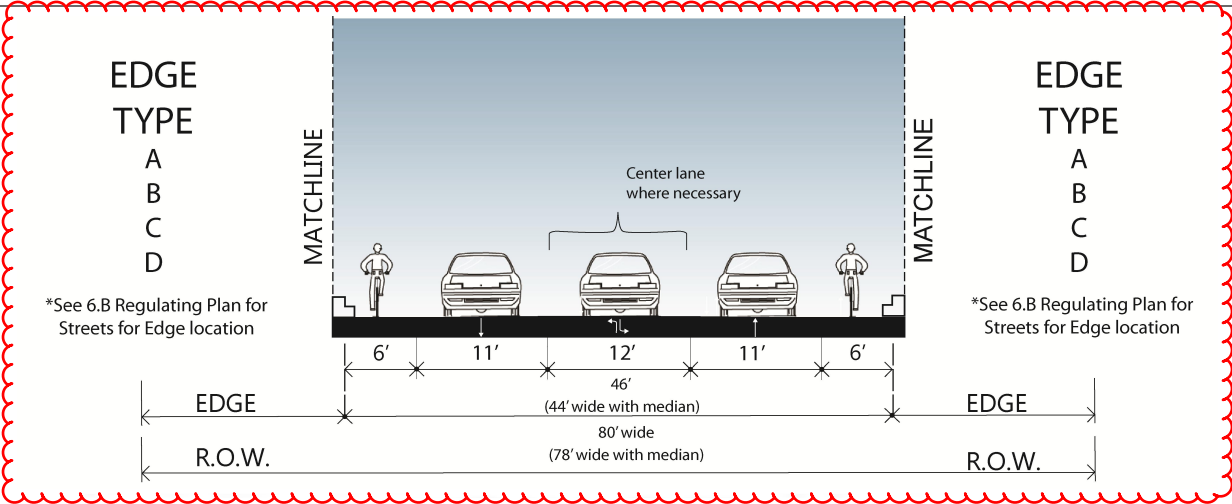

APPLICATION

Thoroughfare Type	3-Lane Minor Arterial
Design Speed	35 mph
Posted Speed	25 mph
Pedestrian Crossing Time	6.3 Sec.

OVERALL WIDTHS

Pavement Width	38 ft.
Total R.O.W.	Edge + 38 ft.(+median, if provided)+ Edge
See totals by Edge Type below	

LANES

Traffic	11 ft.
Parking	8 ft.
Median	None

Two-way Left- Turn*

Greenbelt Median (5.H)	(See 5.B for locations)	add 60 ft.
------------------------	-------------------------	------------

INTERSECTIONS

Curb Radius	20 ft. minimum
-------------	----------------

*per approval by City Public Works director (reduced section wold be 34' curb to curb with 60' ROW)

EDGE TYPE A WIDTHS

1/2 R.O.W.	31 ft.
R.O.W. - Edge 'A' Both Sides	62 ft.
R.O.W. - Edge 'A' + Edge 'B'	57 ft.
R.O.W. - Edge 'A' + Edge 'C'	65 ft.

EDGE TYPE B WIDTHS

1/2 R.O.W.	26 / 51 ft.
R.O.W. - Edge 'B' Both Sides	52 / 102 ft.
R.O.W. - Edge 'B' + Edge 'A'	57 / 82 ft.
R.O.W. - Edge 'B' + Edge 'C'	60 / 85 ft.


EDGE TYPE C WIDTHS

1/2 R.O.W.	34 ft.
R.O.W. - Edge 'C' Both Sides	68 ft.
R.O.W. - Edge 'C' + Edge 'A'	65 ft.
R.O.W. - Edge 'C' + Edge 'B'	60 ft.

EDGE TYPE D WIDTHS


1/2 R.O.W.	19 ft.
R.O.W. - Edge 'D' + Edge 'A'	50 ft.
R.O.W. - Edge 'D' + Edge 'B'	70 ft.

6.E COLLECTOR STREET

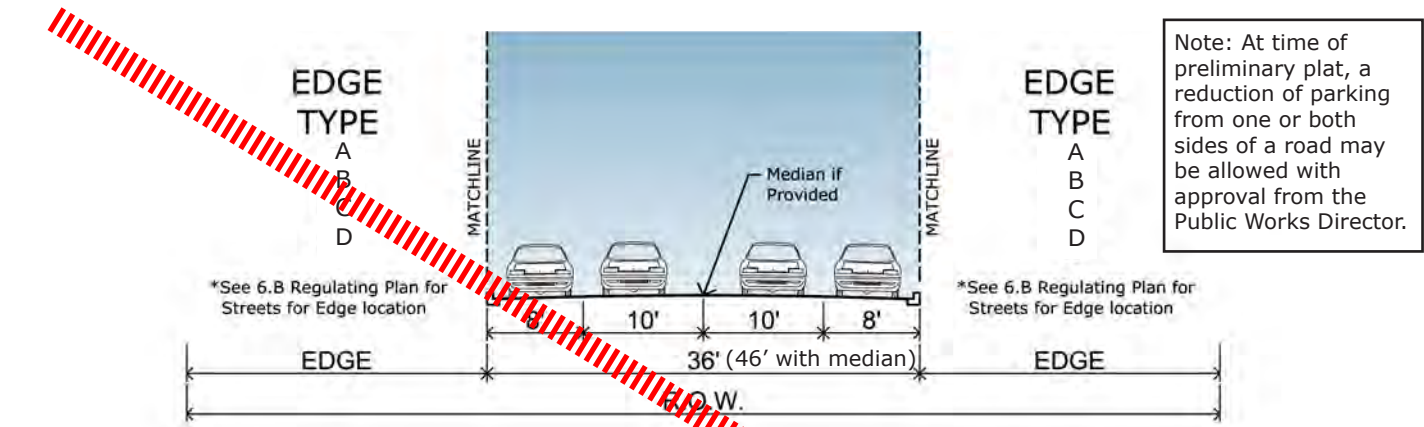


KEY	
	See 6.B Regulating Plan For Streets
APPLICATION	
Thoroughfare Type	Neighborhood Collector
Design Speed	35 mph
Posted Speed	25 mph
Pedestrian Crossing Time	5.7 Sec.
OVERALL WIDTHS	
Pavement Width	36 ft.
Total R.O.W.	Edge + 36 ft.(+median, if provided)+ Edge See totals by Edge Type below


LANES	
Traffic	10 ft.
Parking	8 ft.
Median (Where shown on 6.B)	add 10 ft.
INTERSECTIONS	
Curb Radius	20 ft. minimum

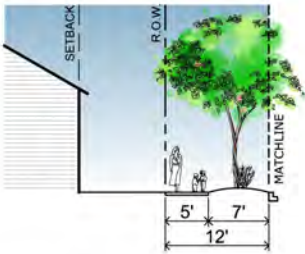


EDGE TYPE A

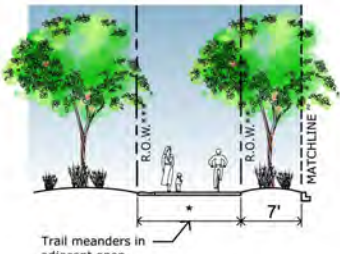

EDGE TYPE B

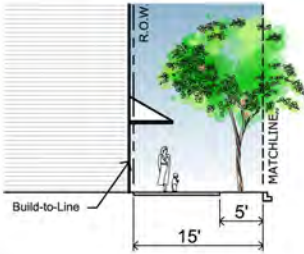

EDGE TYPE C

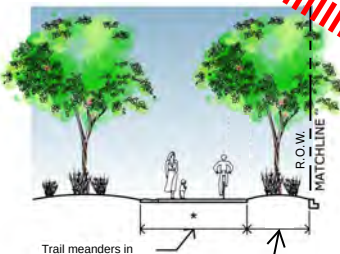

EDGE TYPE D

KEY	
	See 6.B Regulating Plan For Streets
EDGES	
Curb Type	Curb
Planter Type	7 ft. Continuous
Landscape Type	Medium Trees @ 30 ft. O.C. Average
	5 ft. Sidewalks
Walkway Type	Residential
Frontage Type	Dwelling Units
1/2 R.O.W.	31 ft.
R.O.W. - Edge 'A' Both Sides	62 ft.
R.O.W. - Edge 'A' + Edge 'B'	57 ft.
R.O.W. - Edge 'A' + Edge 'C'	65 ft.


KEY	
	See 6.B Regulating Plan For Streets
EDGES	
Curb Type	Curb
Planter Type	7 ft. continuous when adjacent to green space and 20 ft. continuous when adjacent to building lot; May also utilize planter beds or tree grates along Urban Trail or Plaza frontages
Landscape Type	Tree and Spacing Varies
Walkway Type	Meandering Trail in adjacent open space type, or, 8 ft Trail when 20 ft Greenbelt Condition applies
Frontage Type	Greenbelt or Open Space

KEY	
	See 6.B Regulating Plan For Streets
EDGES	
Curb Type	Curb
Planter Type	5 ft. Tree Grate
Landscape Type	Small/Medium Trees @ 25 ft. O.C. Average.
Walkway Type	15 ft. Sidewalks
Frontage Type	Commercial / Multi-family Residential

KEY	
	See 6.B Regulating Plan For Streets
EDGES	
Curb Type	Curb
Planter Type	Irregular spaced groupings of plant materials
Landscape Type	Primarily evergreen trees and other plantings
Walkway Type	Meandering Trail in adjacent Greenway Park
Frontage Type	Open Space
1/2 R.O.W.	19 ft.
R.O.W. - Edge 'D' + Edge 'A'	50 ft.
R.O.W. - Edge 'D' + Edge 'B'	70 ft.


6.F 16 FT. LOCAL STREET

Note: At time of preliminary plat, a reduction to a 12 ft. pavement width per 6.F.1 ALTERNATE, may be allowed with approval by the City of Richland Public Works Director, subject to such conditions as are deemed necessary to provide a safe transition between pavement widths and to provide safe and adequate intersection turning movements.

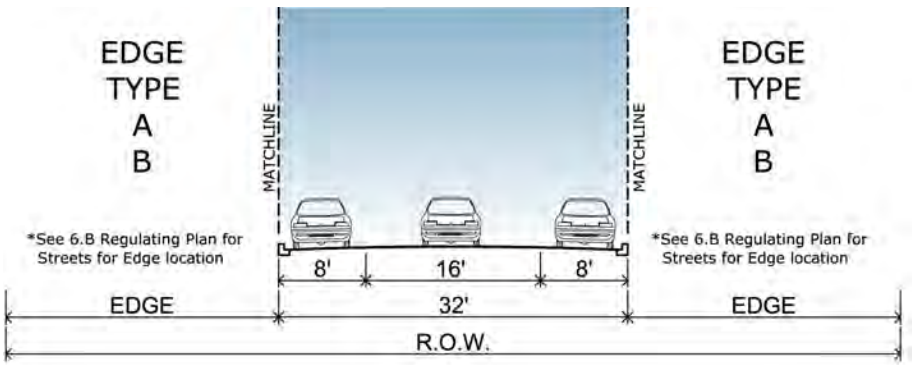


KEY	
	See 6.B Regulating Plan For Streets
APPLICATION	
Thoroughfare Type	Neighborhood
Design Speed	25 mph
Posted Speed	25 mph
Pedestrian Crossing Time	3.4 Sec.
OVERALL WIDTHS	
Pavement Width	32 ft.
Total R.O.W.	Edge + 32 ft. + Edge See totals by Edge Type below

LANES	
Traffic	10 ft.
Parking	8 ft.
Median	None
INTERSECTIONS	
Curb Radius	20 ft. minimum.



EDGE TYPE A

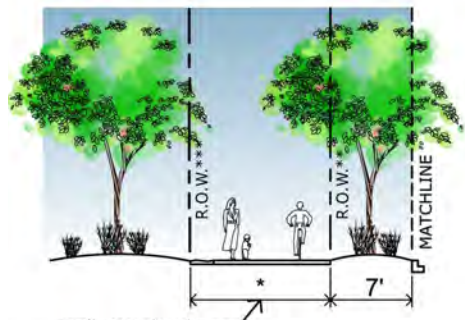


EDGE TYPE B

KEY	
	See 6.B Regulating Plan For Streets
EDGES	
Curb Type	Curb
Planter Type	7 ft. Continuous
Landscape Type	Medium Trees @ 30 ft. O.C. Average
Walkway Type	5 ft. Sidewalks
Frontage Type	Residential Dwelling Units

KEY	
	See 6.B Regulating Plan For Streets
EDGES	
Curb Type	Curb
Planter Type	7 ft. continuous when adjacent to green space and 20 ft. continuous when adjacent to building lot; May also utilize planter beds or tree grates along Urban Trail or Plaza frontages
Landscape Type	Tree and Spacing Varies
Walkway Type	Meandering Trail in adjacent open space type, or, 8 ft Trail when 20 ft Greenbelt Condition applies
Frontage Type	Greenbelt or Open Space

6.E COLLECTOR STREET 6.E.1 MAJOR COLLECTOR

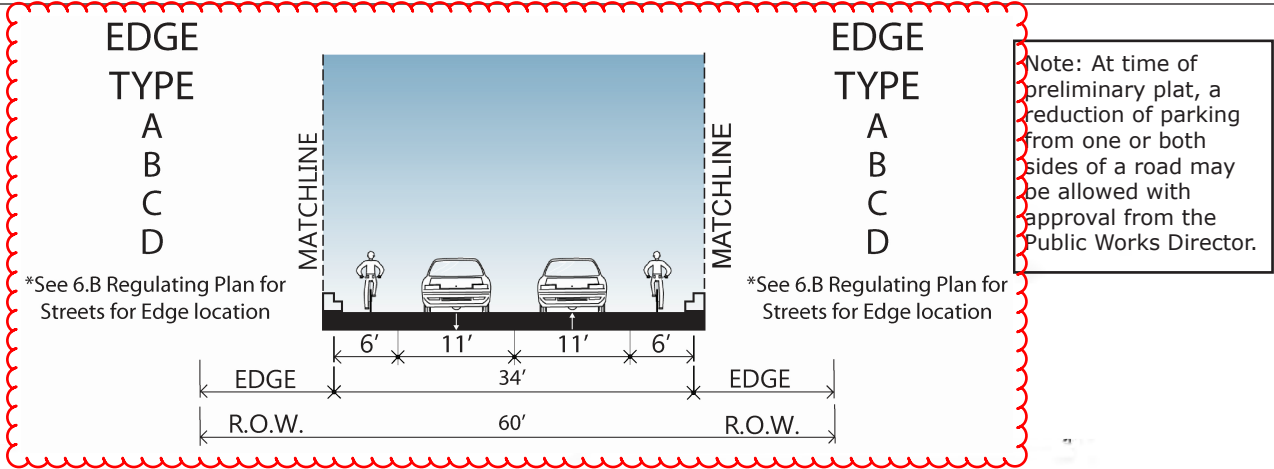

APPLICATION	
Thoroughfare Type	Neighborhood Collector Major Collector
Design Speed	35 mph
Posted Speed	25 mph
Pedestrian Crossing Time	5.7 Sec.
OVERALL WIDTHS	
Pavement Width	36 ft.
Total R.O.W.	Edge + 36 ft.(+median, if provided)+ Edge See totals by Edge Type below

LANES	
Traffic	10 ft. 11 ft.
Parking	8 ft. None
Median (Where shown on 6.B)	add 10 ft.
INTERSECTIONS	
Curb Radius	20 ft. minimum

Striping is generally required

**Select land uses, such as school or commercial, may requiring widening to the 3-lane major collector*


EDGE TYPE A WIDTHS

1/2 R.O.W.	31 ft.
R.O.W. - Edge 'A' Both Sides	62 ft.
R.O.W. - Edge 'A' + Edge 'B'	57 ft.
R.O.W. - Edge 'A' + Edge 'C'	65 ft.

EDGE TYPE D WIDTHS

1/2 R.O.W.	19 ft.
R.O.W. - Edge 'D' + Edge 'A'	50 ft.
R.O.W. - Edge 'D' + Edge 'B'	70 ft.

6.E 2 MINOR COLLECTOR

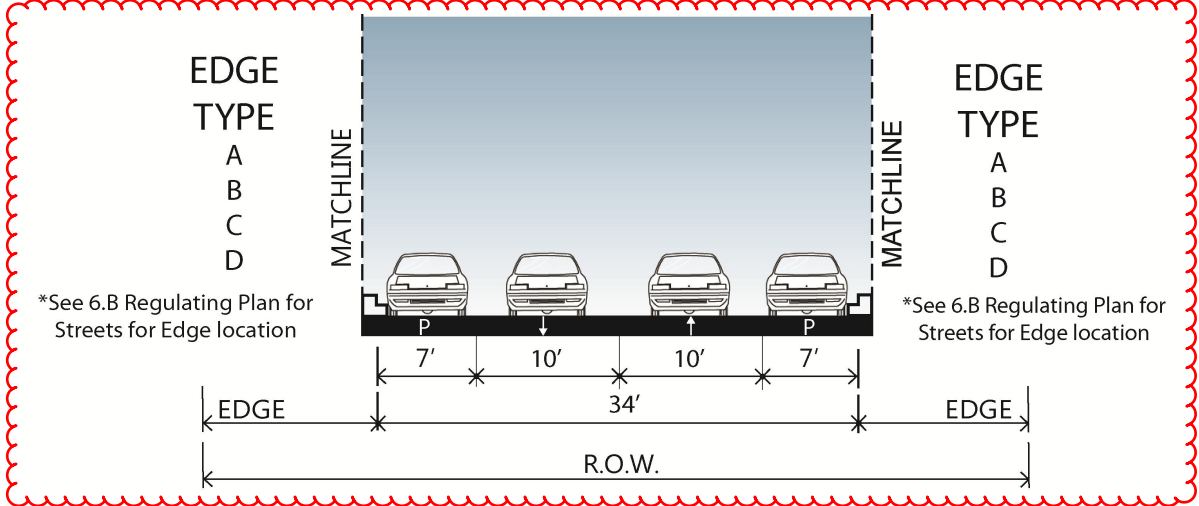

APPLICATION	
Thoroughfare Type	Minor Collector
Design Speed	35 mph
Posted Speed	25 mph
Pedestrian Crossing Time	5.7 Sec.
OVERALL WIDTHS	
Pavement Width	34 ft. 34 ft. 36 ft.
Total R.O.W.	Edge + 36 ft. (+median, if provided)+ Edge See totals by Edge Type below

LANES	
Traffic	11 ft. 10 ft.
Parking	7 ft.
INTERSECTIONS	
Curb Radius	20 ft. minimum

Striping is generally required


EDGE TYPE A WIDTHS

1/2 R.O.W.	31 ft.
R.O.W. - Edge 'A' Both Sides	62 ft.
R.O.W. - Edge 'A' + Edge 'B'	57 ft.
R.O.W. - Edge 'A' + Edge 'C'	65 ft.

EDGE TYPE D WIDTHS

1/2 R.O.W.	19 ft.
R.O.W. - Edge 'D' + Edge 'A'	50 ft.
R.O.W. - Edge 'D' + Edge 'B'	70 ft.

6.F ~~16 FT.~~ LOCAL STREET

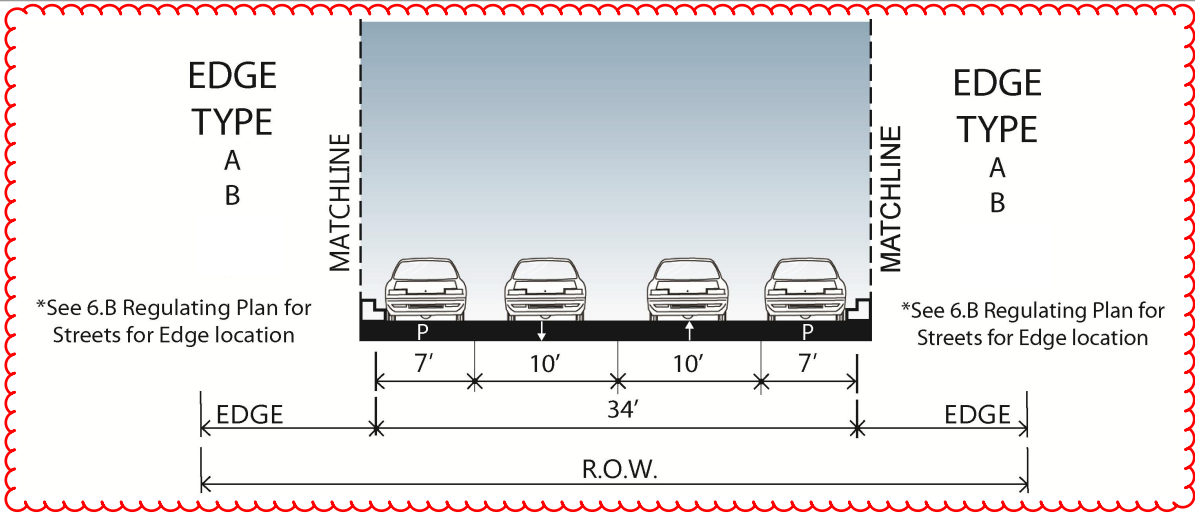

KEY

See 6.B Regulating Plan For Streets

APPLICATION

Thoroughfare Type	Neighborhood
Design Speed	25 mph
Posted Speed	25 mph
Pedestrian Crossing Time	3.4 Sec.

OVERALL WIDTHS

Pavement Width	32 ft. 34
Total R.O.W.	Edge + 32 ft. + Edge
See totals by Edge Type below	

LANES


Traffic	10 ft.
Parking	7.8 ft. 7
Median	None

INTERSECTIONS

Curb Radius	20 ft. minimum.
-------------	-----------------

Note: At time of preliminary plat, a reduction to a 12 ft. pavement width per 6.F.1 ALTERNATE, may be allowed with approval by the City of Richland Public Works Director, subject to such conditions as are deemed necessary to provide a safe transition between pavement widths and to provide safe and adequate intersection turning movements.


6.F.1 ALTERNATE - 12FT. LOCAL STREET

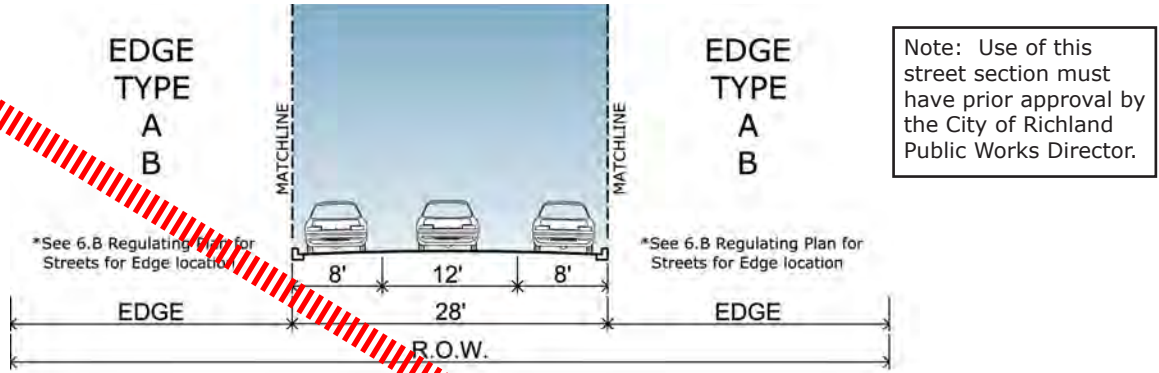

KEY	
	See 6.B Regulating Plan For Streets
APPLICATION	
Thoroughfare Type	Neighborhood
Design Speed	25 mph
Posted Speed	25 mph
Pedestrian Crossing Time	3.4 Sec.
OVERALL WIDTHS	
Pavement Width	28 ft.
Total R.O.W.	Edge + 28 ft. + Edge
See totals by Edge Type below	


LANES	
Train	10 ft.
Parking	8 ft.
Median	None

INTERSECTIONS	
Curb Radius	20 ft. Typ.

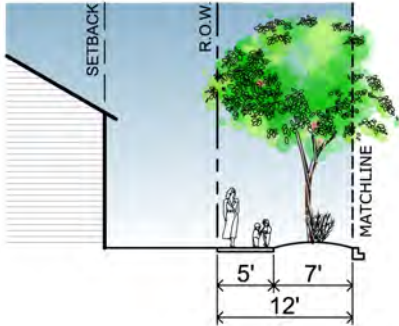

EDGE TYPE A


KEY	
	See 6.B Regulating Plan For Streets
EDGES	
Curb Type	Curb
Planter Type	7 ft. Continuous
Landscape Type	Medium Trees @ 30 ft. O.C. Average.
Walkway Type	5 ft. Sidewalks
Frontage Type	Residential Dwelling Units

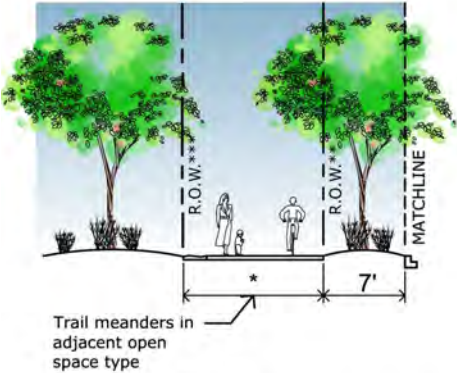

EDGE TYPE B

* See Illustrative Plan for Trail Layout and Trail Types, 5.K	
** ROW adjacent to 7' planter when ROW abuts green space.	
*** ROW includes trail and 20' planter when adjacent to building lot.	
KEY	
	See 6.B Regulating Plan For Streets
EDGES	
Curb Type	Curb
Planter Type	7 ft. continuous when adjacent to green space and 20 ft. continuous when adjacent to building lot; May also utilize planter beds or tree grates along Urban Trail or Plaza frontages
Landscape Type	Tree and Spacing Varies
Walkway Type	Meandering Trail in adjacent open space type, or, 8 ft Trail when 20 ft Greenbelt Condition applies
Frontage Type	Greenbelt or Open Space

6.G REAR ALLEY

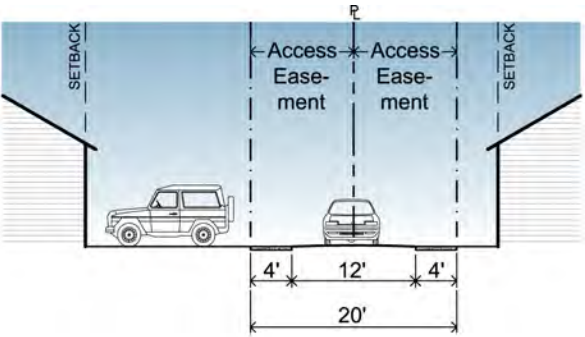

KEY	
	See 6.B Regulating Plan For Streets
APPLICATION	
Thoroughfare Type	Alley
Movement Type	Yield
Design Speed	10 mph
Posted Speed	10 mph
Pedestrian Crossing Time	3.4 Sec.


OVERALL WIDTHS	
Pavement Width	12 ft.
Shoulder Width	4 ft.
Total Width	20 ft.

LANES	
Traffic	12 ft.
Parking	None
Median	None
Ownership	Private

INTERSECTIONS	
Curb Radius	20 ft. Typ.

ACCESS EASEMENT	
From Rear Yard Property Line	10 ft.

6.F.1 ALTERNATE - 12FT. LOCAL STREET

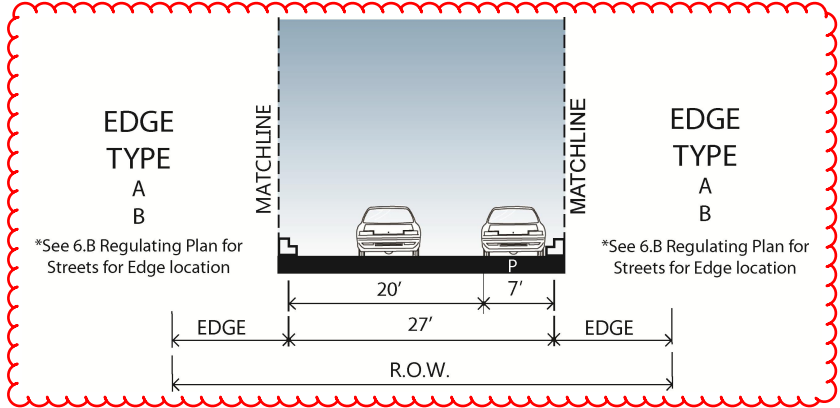

APPLICATION

Thoroughfare Type	Neighborhood
Design Speed	25 mph
Posted Speed	25 mph
Pedestrian Crossing Time	3.4 Sec.

OVERALL WIDTHS

Pavement Width	27 27 28 ft.
Total R.O.W.	Edge + 28 ft. + Edge See totals by Edge Type below


LANES

Traffic	10 ft. 20 ft.
Parking	8 ft. 7 ft.
Median	None

INTERSECTIONS

Curb Radius	20 ft. Typ.
-------------	-------------

6.G REAR ALLEY

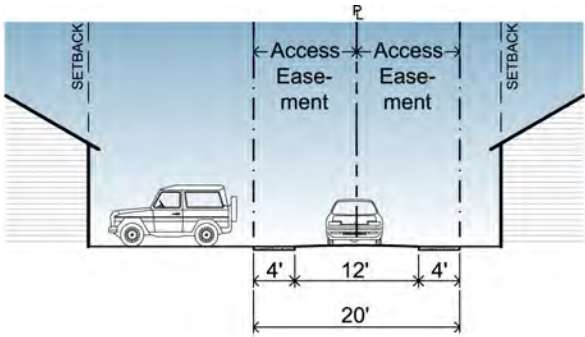

APPLICATION

Thoroughfare Type	Alley
Movement Type	Yield
Design Speed	10 mph
Posted Speed	10 mph
Pedestrian Crossing Time	3.4 Sec.

OVERALL WIDTHS

Pavement Width	12 ft.
Shoulder Width	4 ft.
Total Width	20 ft.

LANES

Traffic	12 ft.
Parking	None
Median	None
Ownership	Private

INTERSECTIONS


Curb Radius	20 ft. Typ.
-------------	-------------

ACCESS EASEMENT

From Rear Yard Property Line	10 ft.
------------------------------	--------

6.H ROUNDABOUT

Note:
Roundabouts
are allowed at
intersections and
will be built per
City of Richland
Public Works
Standards.

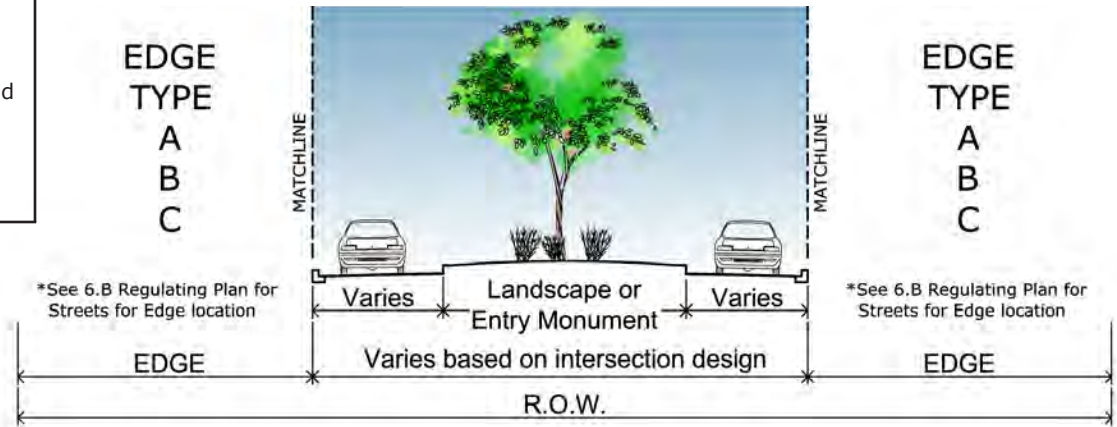

KEY

○ See 6.B Regulating Plan For Streets

APPLICATION

Thoroughfare Type	Yielding roundabout
Design Speed	25 mph
Posted Speed	25 mph
Pedestrian Crossing Time	Varies based on location

LANES

Traffic Varies based on intersection design

INTERSECTIONS

Curb Radius Varies based on intersection design

EDGE TYPE A

KEY

See 6.B Regulating Plan For Streets

EDGES

Curb Type	Curb
Planter Type	7 ft. Continuous
Landscape Type	Medium Trees @ 30 ft. O.C. Average
Walkway Type	5 ft. Sidewalks
Frontage Type	Residential Dwelling Units

EDGE TYPE B

*See Illustrative Plan For Trail Layout and Trail Types, 5.K

KEY

See 6.B Regulating Plan For Streets

EDGES

Curb Type	Curb
Planter Type	7 ft. Continuous
Landscape Type	Tree and Spacing Varies
Walkway Type	Meandering Trail in adjacent open space
Frontage Type	Greenbelt or Open Space

EDGE TYPE C

* Unless otherwise dictated by site constraints

KEY

See 6.B Regulating Plan For Streets

EDGES

Curb Type	Curb
Planter Type	5 ft. Tree Grate
Landscape Type	Small/Medium Trees @ 25 ft. O.C. Average
Walkway Type	15 ft. Sidewalks
Frontage Type	Commercial / Multi-family Residential



**BLOCK STANDARDS
AND
PROJECT TARGETS**

7

Section 7 establishes the framework for creating the pedestrian-scaled, walkable community of Badger Mountain South by outlining the process for using Block Standards to subdivide land. Illustrative Neighborhood Plans and density targets are provided to ensure that community goals are met.

7.A	Introduction	7-2
7.B	Block Standards	7-2
7.C	Project Density and Open Space Targets.....	7-3
7.D	Illustrative Neighborhood Development Plan.....	7-3

7.A INTRODUCTION

Section 7 provides the standards to follow when subdividing property in Badger Mountain South. These standards are intended to create an urban infrastructure of walkable blocks interspersed with parks and open space within a ~~traditional neighborhood street grid~~. These elements of the block standards are important components of creating a walkable and sustainable community in Badger Mountain South.

The ~~actual~~ platting and subdivision process begins with a pre-application meeting with the MPA and then follows the City of Richland process as described in RMC Title 24; ~~these steps are illustrated in Section 1.J Submittal Review Process.~~ (See ~~illustrated in~~ Section 1.J Submittal Review Process.)


When creating a residential subdivision, it is important to understand the Building Type intended to be constructed as well as the District in which the properties is found. Both the District and the Building Types establish particular standards that will influence the lot sizes created during the platting process. District standards are identified in Section 3, Urban Form Standards by District, and Building Type standards are identified in Section 8, Building Type Standards.

Badger Mountain South has also established density and open space targets for each of the five residential neighborhoods; these are discussed in Section 7.C. These targets are set to ensure that the community can meet its intended goals of ~~diversity in housing types and prices, and provide opportunities for the establishment of intergenerational neighborhoods as reflected in the diversity of housing built here.~~ The density and open space targets are monitored by the City of Richland Development Services Department during plat and subdivision review.

(West Vineyard, West Village, East Garden, East Market and South Orchard)

in the various housing types built in Badger Mountain South.

7.B BLOCK STANDARDS

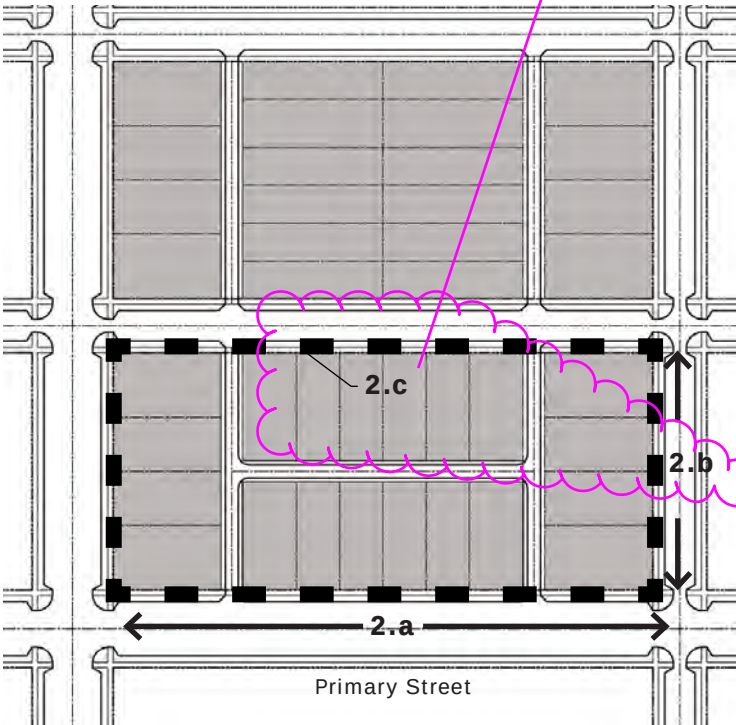

Block Diagram

1. INTENT

The layout of an interconnected street network composed of small blocks are a crucial component to creating a walkable community. The intent of these standards is to create a pedestrian environment that has limited interruptions from vehicles, and allows for maximum connectivity to the surrounding neighborhood areas and amenities.

2. BLOCK DIMENSIONS

- a. Length: 1,000 ft., maximum *
*400 ft. max. in BMS-VMU District
and on cul-de-sacs.


3. STREET NETWORK

- a. A simple grid street and block network is preferred.
- b. The street and block network is not required to be orthogonal in response to site features and/or topographical constraints, however streets should be interconnected.
- c. Street stubs are required when adjacent sites are vacant.
- d. Cul-de-sacs are discouraged but will be allowed where necessary due to site constraints or to enhance the walkable community by limiting vehicle access.
- e. All buildings must face a street or shared open space.

4. ALLEYS / STREET ACCESS

- a. Alleys are encouraged to be used in the following Districts:
 - (1) Village Mixed-Use (BMS-VMU), except for Commercial/ Mixed-Use / Liner Building Type which may utilize the entire block.
 - (2) Neighborhood Collector (BMS-NC), except for commercial sites with Neighborhood Goods and Services Building Type.
- b. Dead-end alleys greater than 150 ft. are not permitted.
- c. Blocks with direct street access lots (i.e. without Alleys) are to be limited in use per the following criteria:
 - (1) Direct street access lots are permitted onto a Collector Street when they are (i) located in the BMS-NE District; (ii) when they are in the BMS-NG District and are located along the perimeter of the BMS project boundary; or (iii) when they are located in the BMS-NG District where that district abuts the BMS-NE District.

Remove 2.b and 2.c labels

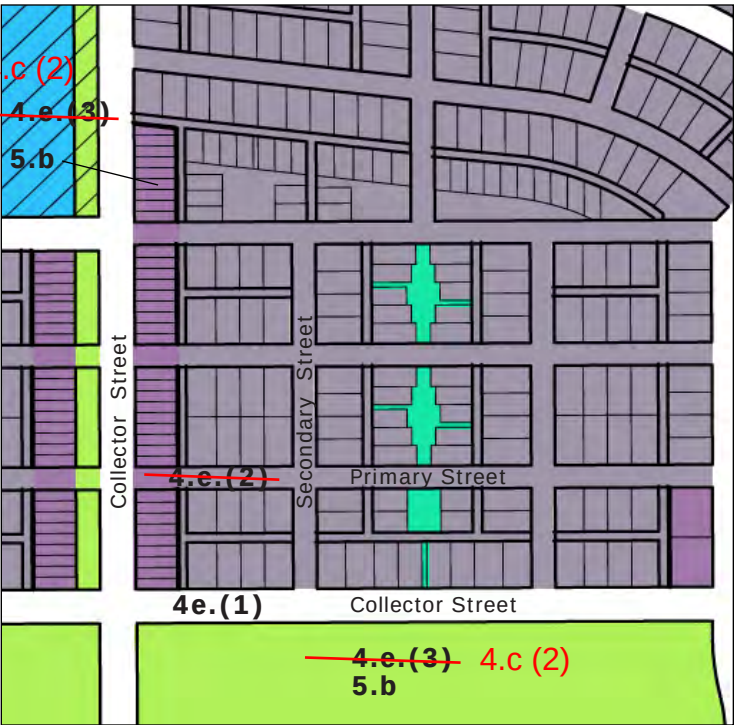

Typical Blocks with Alleys and Limited Blocks with Street Access Only

(2) Due to increased pedestrian traffic, street accessed blocks are not allowed across from Civic spaces.

5. BLOCK CONFIGURATION

- a. In order to create neighborhood ~~diversity~~ variation, a minimum number of Building Types per block are required as follows:
Refer to Section 2.D for all of the Building Types that are allowed in each District.
fix spacing
(1) Village Mixed-Use (BMS-VMU): 2 Types/Block
(2) Neighborhood Collector (BMS-NC): 2 Types/Block
(3) Neighborhood General (BMS-NG): 2 Types/Block
- b. Blocks adjacent to the Civic District (BMS-CIVIC) are required to have lots fronting onto the Civic space.

7.C PROJECT DENSITY AND
OPEN SPACE TARGETS

The Badger Mountain South community is composed of five residential neighborhoods – West Vineyard, East Garden, West Village, East Market and South Orchard – and one commercial campus called Badger Mountain Station. These areas are shown in Section 7.D, Illustrative Neighborhood Development Plan.

The LUDR is designed to have the flexibility to meet changing conditions, but with standards that result in a community with all the elements shown in this Illustrative Neighborhood Master Plan image.

The Neighborhood Sectors are geographical boundaries based on the proposed street network. They are intended to assist with the geographic distribution of smaller-sized common open spaces and parks based on density, as well as on the location of larger common amenities such as the Greenway Parks. The Neighborhood Sectors are also used to help identify the targeted proportion of the overall community goal of 60 percent Single-family housing to 40 percent Multi-family housing.

A summary of the density targets for each of the residential neighborhoods is provided below. The targets are described as a minimum and a maximum number of units because each neighborhood contains Districts that allow for more than one Building Type. Since each Building Type can impact neighborhood density differently, density is provided as a range of numbers of units. Construction of a variety of Building Types provides the opportunity to create interesting and diverse neighborhoods while also offering the flexibility to adjust to market demands over the build-out of the community. This flexibility is an important component to creating a walkable and sustainable community. The density targets will be monitored by the City of Richland to ensure that project goals are met over time.

DENSITY TARGETS:	Min.	Max.
WEST VILLAGE	830 units	1040 units
WEST VINEYARD	430 units	510 units
EAST GARDEN	1,050 units	1,150 units
EAST MARKET	1,300 units	1,650 units
SOUTH ORCHARD	540 units	650 units
TOTALS:	4,150 UNITS	5,000 UNITS


NOTES:

a. A minimum of 10 percent of the NC zone shall be designated for use as multifamily or commercial space.

b. Density may be adjusted between communities to achieve desired mix of product types. Community density or adjustment shall be submitted to the city with platting submittal.

c. Concept sketches to show neighborhood density to be provided to show that proposed density can be achieved.

7.D ILLUSTRATIVE NEIGHBORHOOD DEVELOPMENT PLAN

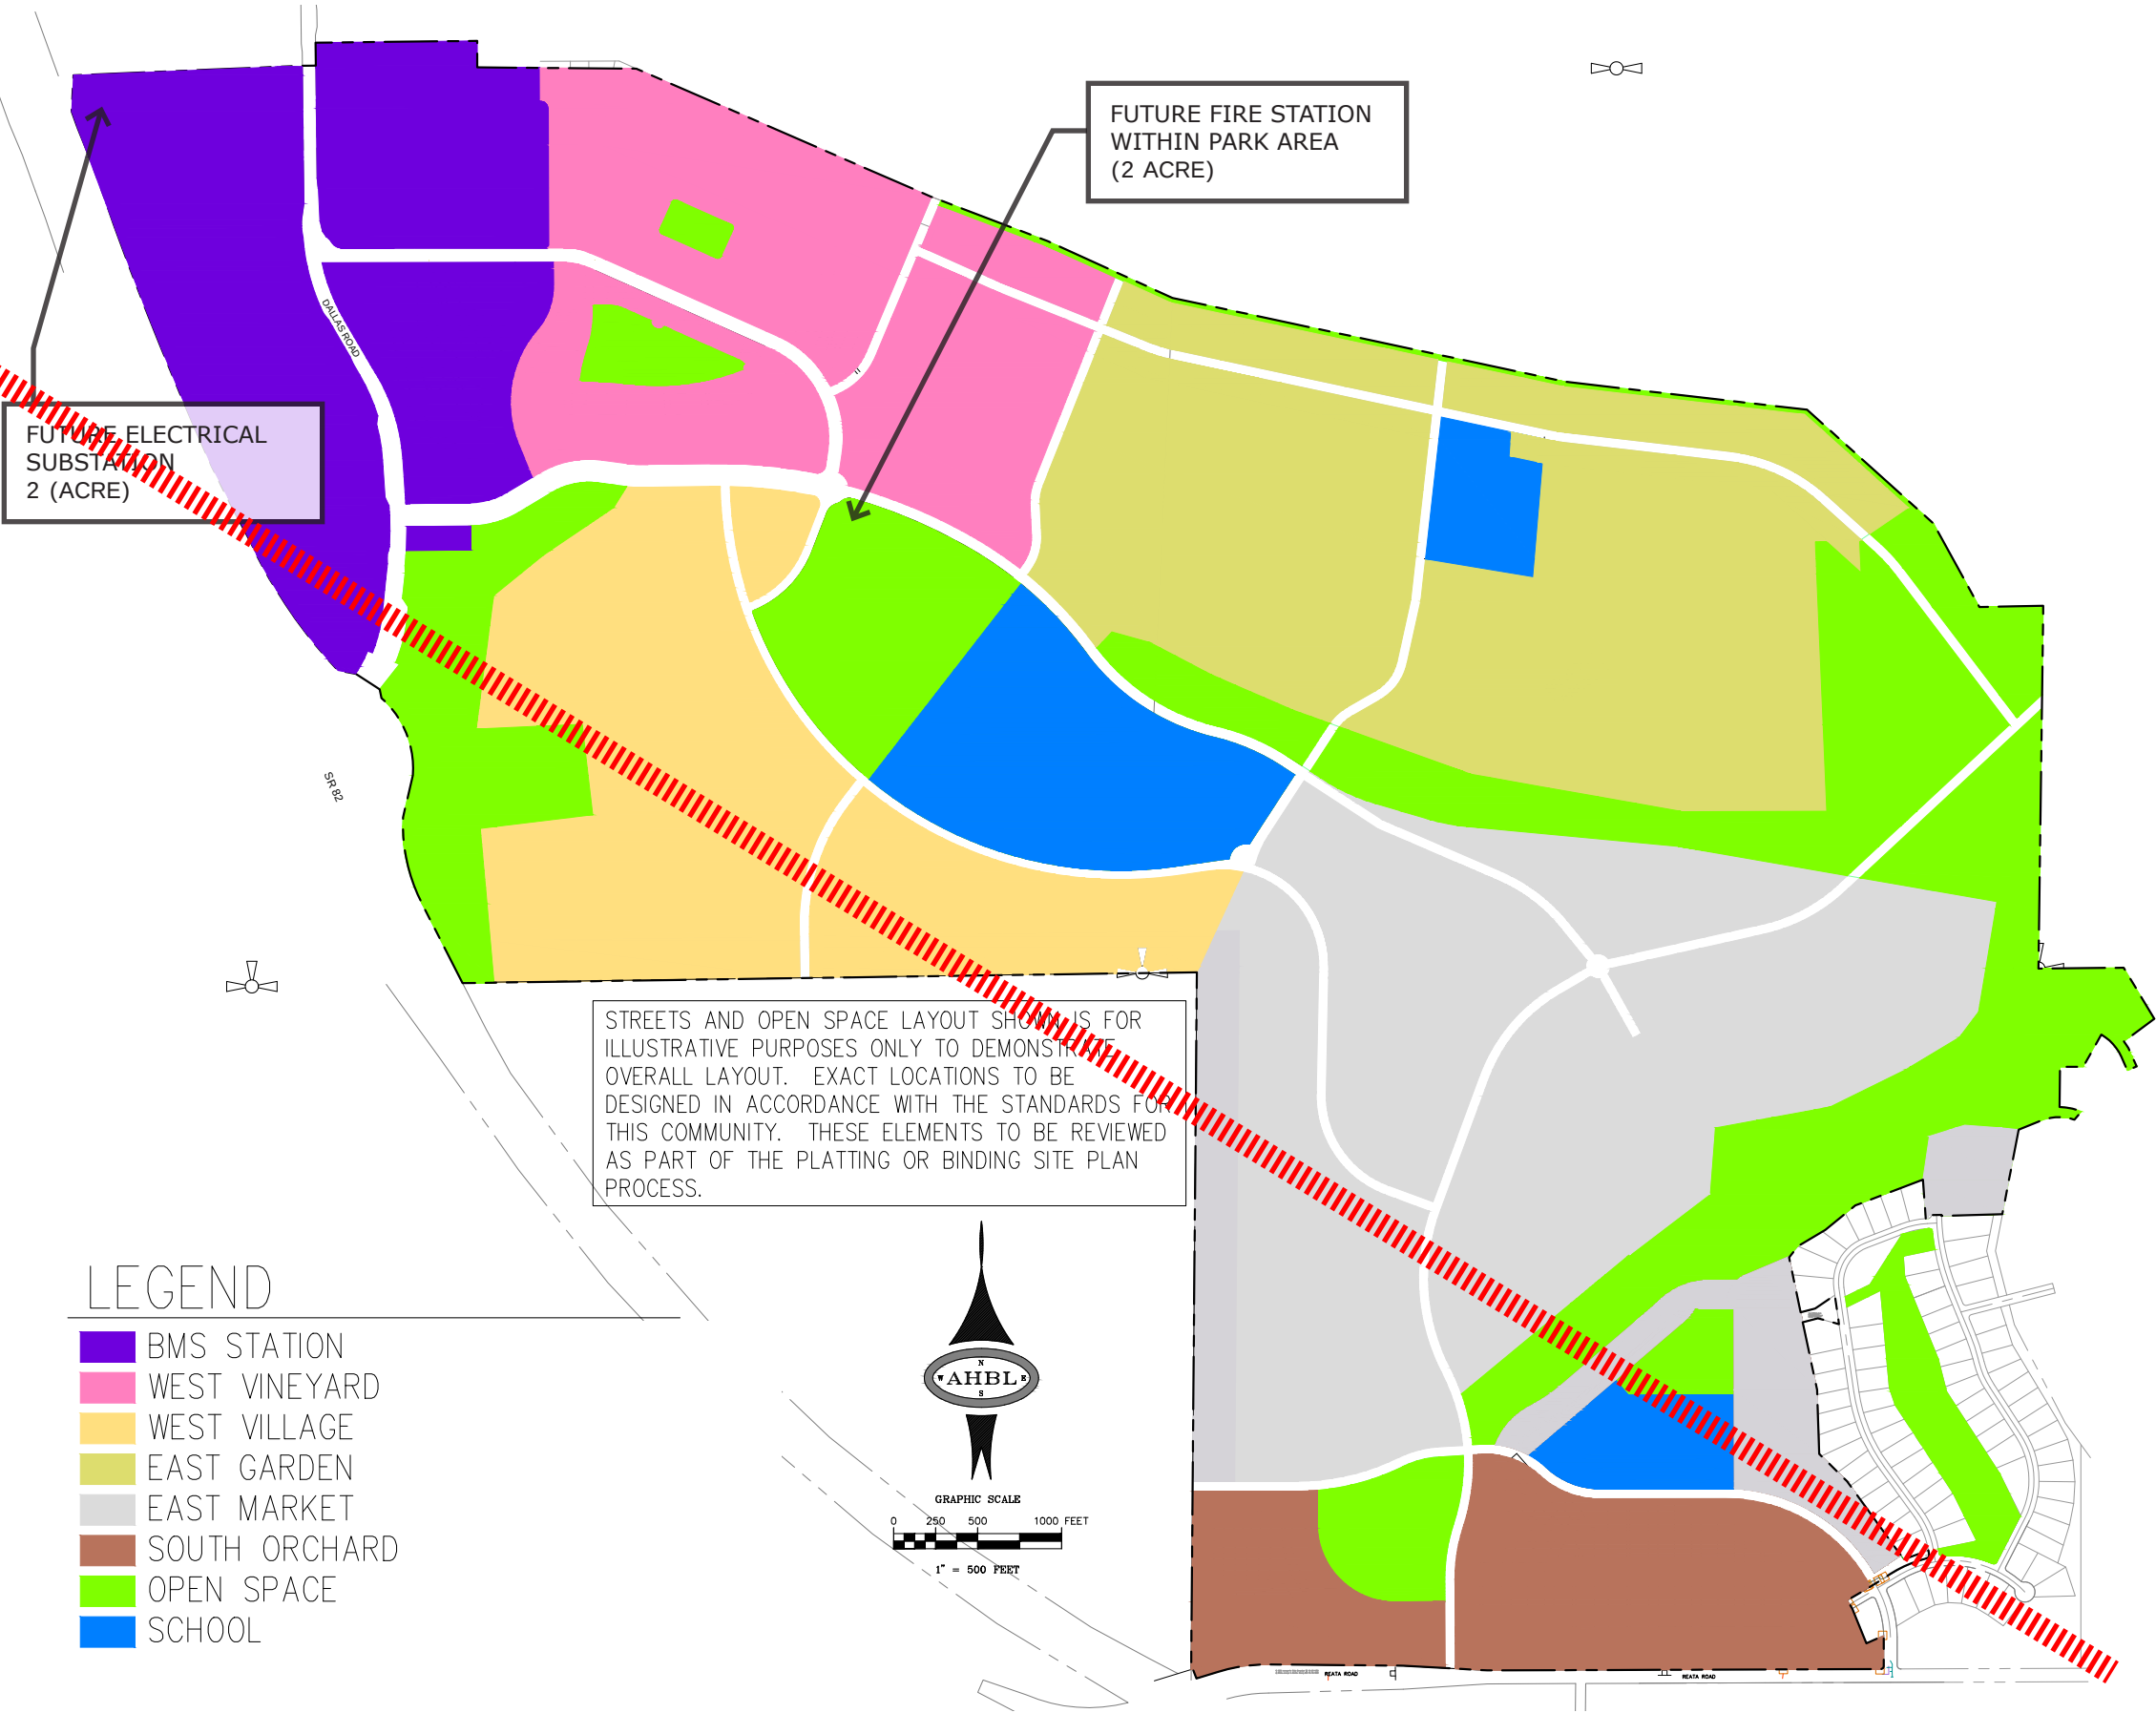

7.C PROJECT DENSITY AND OPEN SPACE TARGETS

The Badger Mountain South community is composed of five residential neighborhoods – West Vineyard, East Garden, West Village, East Market and South Orchard – and one commercial campus called Badger Mountain Station. These areas are shown in Section 7.D, Illustrative Neighborhood Development Plan.

The LUDR is designed to have the flexibility to meet changing conditions, but with standards that result in a community with all the elements shown in this Illustrative Neighborhood Master Plan image.

The Neighborhood ~~Sectors~~ are geographical boundaries based on the proposed street network. They are intended to assist with the geographic distribution of smaller-sized common open spaces and parks based on density, as well as on the location of larger common amenities such as the Greenway Parks. The Neighborhood ~~Sectors~~ are also used to help identify the targeted proportion of the overall community goal of 60 percent Single-family housing to 40 percent Multi-family housing.

A summary of the density targets for each of the residential neighborhoods is provided below. The targets are described as a minimum and a maximum number of units because each neighborhood contains Districts that allow for more than one Building Type. Since each Building Type can impact neighborhood density differently, density is provided as a range of numbers of units. Construction of a variety of Building Types provides the opportunity to create interesting and diverse neighborhoods while also offering the flexibility to adjust to market demands over the build-out of the community. This flexibility is an important component to creating a walkable and sustainable community. The density targets will be monitored by the City of Richland to ensure that project goals are met over time.

DENSITY TARGETS:	Min.	Max.
WEST VILLAGE	830 units	1040 units
WEST VINEYARD	430 units	510 units
EAST GARDEN	1,050 units	1,150 units
EAST MARKET	1,300 units	1,650 units
SOUTH ORCHARD	540 units	650 units
TOTALS:	4,150 UNITS	5,000 UNITS

- NOTES:
- ~~a. A minimum of 10 percent of the NC zone shall be designated for use as multifamily or commercial space.~~
 - b. Density may be adjusted between communities to achieve desired mix of product types. Community density or adjustment shall be submitted to the city with platting submittal.
 - c. Concept sketches to show neighborhood density to be provided to show that proposed density can be achieved.

(Badger Mountain Station may also have some mixed-use elements).

7.D ILLUSTRATIVE NEIGHBORHOOD DEVELOPMENT PLAN



20210204_BMSLUDR_2D_2200365.png

THIS PAGE INTENTIONALLY LEFT BLANK



**BUILDING
TYPE
STANDARDS**

8

Section 8 identifies the design standards for each of the Building Types allowed within the Districts that make up Badger Mountain South.

Commercial Districts and Projects

8.A Introduction	8-2
8.B Building Types Summary.....	8-2
8.C Common Design Standards for all Districts.....	8-3
8.D Civic/Community/Institutional.....	8-4
8.E Neighborhood Goods and Services Buildings.....	8-5
8.F Commercial/ Mixed-Use / Liner.....	8-6
8.G Live/Work	8-7
8.H Stacked Unit Building.....	8-8
8.I Row House	8-9
8.J Courtyard Housing.....	8-10
8.K Mansion Apartment	8-11
8.L Paired House (Duplex).....	8-12
8.M Cottage Court.....	8-13
8.N Single-Family House - Alley Access.....	8-14
8.O Single-Family House - Street Access.....	8-15
8.P Accessory Unit	8-16

8.A INTRODUCTION

~~identifies~~ details
This Section identifies the design standards for each of the Building Types allowed within the Districts that make up Badger Mountain South. These standards ensure that the proposed development is consistent with the Badger Mountain South community goals for building form, character and quality.
these regulations

~~this code~~
Building Types are defined in this code primarily by the physical form of the building and secondarily by its use or function. Specific placement and configuration of building or groups of buildings are regulated to create certain physical spaces between and within the buildings. The intent of this Section is to provide a variety of Building Types, often within the same block, to create a diverse community.

A community composed of a variety of Building Types provides a range of housing prices, proximity to neighborhood services and amenities and the potential to establish intergenerational neighborhoods.

Commerical Districts and Projects.
The individual Building Type Standards are preceded by Section 8.C., Common Design Standards applicable to all Districts. The Common Design Standards identify principles or unifying features that will be applied to all Building Types in any District. These standards further the goal of creating a walkable and sustainable community.

The Building Type Standards that follow include:

- 1. Building Type Description
- 2. Applicable Districts
- 3. Streetscape
- 4. Lot Size
- 5. Access
- 6. Building Size and Massing
- 7. Frontages
- 8. Landscape Standards
- 9. Sustainable Standards
- 10. Site Improvement Standards
- 11. Parking
- 12. Accessory Units (where applicable)

Each building in the Badger Mountain South community, with the exception of development in the Special Districts, shall be one of the Building Types listed here and shall be designed in compliance with the standards of this Section. The Special Districts included in Section 4 are not regulated by Building Type, however Section 8.C Common Design Standards, ~~applies to all Districts, including~~ includes Special Districts.
for all Commercial Districts and Projects.

In addition to the standards in this Section, each Building Type is subject to the requirements of the applicable Urban Form Standards for Districts in Section 3 and the applicable Frontage Type Standards in Section 9. As previously noted on page 3-2, since the Urban Form Standards for Districts found in Section 3 are of primary importance in establishing the character and quality of the neighborhoods, they supersede the Building Type Standards when in conflict.

Section 3 Urban Form Standards for Districts identify the intent of the District and regulate the building placement on lot (setbacks and encroachments), building profile and type (building height, Building Types and Frontage Types) and parking (placement, access and requirements).

Section 9 Frontage Type Standards define the various allowed Frontage Types and identifies the required configuration (depth, width, height, components, etc) of each type.

8.B BUILDING TYPES SUMMARY

SUMMARY OF TYPE CHARACTERISTICS					BUILDING TYPES ALLOWED BY DISTRICT							
BUILDING TYPE	MULTI-FAMILY	MIXED-USE	LOT WIDTH Min. - Max.	STORIES Max.	BMS-VMU	BMS-NC	BMS-NG	BMS-NE	BMS-CIVIC	BMS-SD-SR	BMS-SD-CMU	BMS-SD-DR
8.D CIVIC/COMMUNITY/INSTITUTIONAL FACILITIES	NO	NO	No Limit	3	A X	A X	A X		A X	Note: Special Districts are not regulated by Building Type. See Section 4 for District intent and standards. See also 8.C for Common Design Standards applicable to all Districts. for all Commercial Districts and Projects.		
8.E NEIGHBORHOOD GOODS AND SERVICES BUILDING	NO	NO	300 ft. Max.	3	A X	A X						
8.F COMMERCIAL / MIXED-USE / LINER	YES	YES	25 ft. -400 ft. Min - Max	4	A X	A X						
8.G LIVE/WORK BUILDING	YES	YES	24 ft. Min.	3	A X	A X						
8.H STACKED UNIT BUILDING	YES	NO	200 ft. Max.	3	A X	A X						
8.I ROW HOUSE / TOWN HOUSE	YES	NO	16 ft. Min.	3	A X	A X						
8.J COURTYARD HOUSING	YES	NO	125 ft. Min.	2.5		A X	A X		-P			
8.K MANSION APARTMENT (3 - 6 PLEX)	YES	NO	70 ft. -100 ft. Min - Max	2.5		A X	A X		-P			
8.L PAIRED HOUSE (DUPLEX)	YES	NO	50 ft. -70 ft. Min - Max	2.5		A X	A X		-P			
8.M COTTAGE COURT	NO	NO	35 ft. Min.	2			A X		-P			
8.N SINGLE-FAMILY HOUSE - ALLEY ACCESS GARAGE	NO	NO	40 ft. Min.	2.5		A X	A X	A X	-P			
8.O SINGLE-FAMILY HOUSE - STREET ACCESS GARAGE	NO	NO	50 ft. Min.	2.5			A X	A X	-P			
8.P ACCESSORY UNIT	NO	NO	35 ft. Min.	2			A X	A X	-P			

~~A~~
X= Allowed Building Type
-P = Allowed only in -P Overlay District, if land use conditions, as found in 2.C. Land Use Table are met.



Illustrative Photo: Commercial Plaza

GENERAL
1. SITE DESIGN

- a. Site buildings to respond to unique site conditions such as non-rectangular lots, location on prominent intersections, unusual topography, views and other natural features.
- b. Maximize opportunities for usable, attractive, well-integrated open space.
- c. Site design shall account for solar access and shading at exterior open space.
- d. Minimize the height of retaining walls and/or reduce their visual impact by means of textured surface, inlaid materials, green screens and other types of landscaping.
- e. Entries shall be clearly identifiable from the street.
- f. Provide buffers at residential entries at sidewalks and within mixed-use frontages by means of entry courtyards, porches or stoops as well as landscaping.

2. WALKABLE DESIGN – PROMOTE PEDESTRIAN SAFETY

- a. Provide a linked, safe pedestrian circulation pathway.
- b. Link public open space with entries, courts and plazas.
- c. Minimize crossing sidewalks with vehicle access.
- d. Access parking from Alleys or Secondary (Side) Streets where Alleys are not present are encouraged.
- e. Vehicular access to lots from streets is limited per the criteria in Section 7.B.
- f. Sidewalks wider than the 15 feet standard and/or plazas at Mixed-Use and commercial frontages are encouraged.

3. ACTIVE STREET ENVIRONMENT – ENCOURAGE AN ACTIVE



Illustrative Photo: Mixed-Use Street Frontage

STREET LIFE

- a. Overhead weather/sun protection at non-residential uses are encouraged.
- b. Provide transparency into and from non-residential uses by maximizing the use of the Storefront Frontage Type (9.B).
- c. Encourage sidewalk activities that support street life where appropriate, such as outdoor dining, indoor-outdoor commercial/retail space, public plazas and outdoor seating.

4. LOCATION OF VEHICLE PARKING / TRASH AND RECYCLING / UTILITY STRUCTURES AND BUILDING SERVICE AREAS

- a. Locate and screen parking lots, trash and utility structures to avoid visibility from the public way.
- b. At corner lot conditions, provide screening by means of a garage, fencing and/or landscaping.
- c. Loading docks, overhead doors, except those serving as architectural feature in retail or dining establishments, and other service entries are allowed only from a Service Street, Alley or parking area.

5. CORNER CONDITIONS



Illustrative Photo: Corner Condition

Design of buildings on corner sites shall respond to their unique community location and visibility as follows:

- a. Buildings on corner lots must ~~address~~ ^{relate to} both streets.
- b. Give special consideration to corners such as angled or curved facade addressing the corner, a recessed entry, wrap around storefront, porch, tower or similar architectural treatment.
- c. Side street facing end elevations to include appropriate articulation, windows and architectural elements, similar to the front elevation.
- d. Give special consideration to the landscape design on corners such as a prominent landscape element, outdoor plaza hardscape or the inclusion of public art.

6. SAFETY AND SECURITY



Illustrative Photo: Courtyard Design

- a. Provide lighting where appropriate and necessary for pedestrian safety.
- b. Design site layouts for "eyes-on-the-street" providing natural surveillance.
- c. Follow CPTED guidelines (Crime Prevention Through Environmental Design) for clear visibility of the front door, appropriate lighting, and clear transition between public and private spaces.
- d. Provide safe accessible pathways connecting interior parking courts with street frontages.

correct heading
placement

←
reposition photos for proper alignment

such as schools, public safety buildings, libraries, recreation and other buildings,

1. TYPE DESCRIPTION

Civic /Community/Institutional Facilities are important structures that help define the neighborhoods and places where they are built. ~~Buildings of this type include schools, public safety buildings, libraries, recreation and other community buildings.~~ Facilities of this type are provided with prominent sites to reflect the building's importance to the community. These sites are distributed throughout the neighborhoods, often at major intersections, terminated vistas or in a larger Local Park.

2. APPLICABLE DISTRICTS

- a.  Civic District (BMS-CIVIC) (3.F)
- b.  Village Mixed-Use (BMS-VMU) (3.B)
- c.  Neighborhood Collector (BMS-NC) (3.C)
- d.  Neighborhood General* (BMS-NG) (3.D)

* Civic/community/institutional facilities may be located in a Local Park.

3. STREETScape

- a. In general, Civic, Community and Institutional Facilities are intended to be high profile buildings considering their symbolic presence in the community. The character and function of these Building Types must communicate their symbolic presence and role in the community.
- b. Civic, Community and Institutional Facilities will have more open space around them, more landscaping, are associated with public gathering areas and shall be sited along major vehicle and pedestrian circulation routes.
- c. Only the most durable and long lasting materials shall be used in these Building Types.



Illustrative Photo: School / Institutional Building

4. LOT SIZE

- a. Width: No limits
- b. Depth: No limits
- c. See applicable District Standards in Section 3 for required setbacks and Build-to-Lines.

5. ACCESS

- a. Walkable Design: Careful attention must to be given to safe and convenient access and circulation for pedestrians. Consideration must be given to the site selection, placement and access along the community trail network to maximize pedestrian and bicycle access to the facility, see Section 5.K Illustrative Plan for Trail Layout and Trail Types.
- b. The main building entry shall front onto a Collector Street wherever practical. In the BMS-NG District, where a Civic/Community/Institutional Facility may be located in a Local Park surrounded by Local Streets only, the main building entry must be placed along the Primary (Front) Street. The Primary Street shall be established by the blocks on either side of the Local Park.
- c. Vehicular access should be from a Secondary (Side) street or Alley.
- d. Services, including utility access, above ground equipment and trash containers shall be located to the rear of the building or screened from view.

6. BUILDING SIZE AND MASSING

- a. Maximum number of stories: 3
- b. Towers, spires, flag poles or other architectural elements may extend 12 ft. above height limit.
- c. Ground floor ceiling height shall be a minimum of 10 ft .clear to accommodate assembly uses.
- d. Refer to Section 3 for additional District-specific building height standards.



Illustrative Photo: Community Building

7. FRONTAGES

- a. Due unique nature of this Building Type, specific Frontage Types are not ~~applicable.~~ **defined.**
- b. Frontages should clearly express the public nature of the facility with a well defined entry and ~~transparency to~~ **clear outward indication of** community uses.
- c. Refer to Section 3 for applicable District standards for allowed encroachments into required setbacks.

8. LANDSCAPE STANDARDS

- a. ~~The Common Landscape standards in 11.C and the Civic Landscape standards set forth in Section 11.D are applicable to Civic/Community/Institutional Facilities.~~ **See**

9. SUSTAINABLE STANDARDS

- a. ~~The Common standards in 12.C and the Non-Residential Sustainable standards set forth in Section 12.D are applicable to Civic/Community/Institutional Facilities.~~ **See**

10. SITE IMPROVEMENT STANDARDS

- a. ~~The Standards set forth in Section 13 are applicable to Civic/Community/Institutional Facilities.~~ **See**



Illustrative Photo: Civic Building

11. PARKING

- a. Commercial parking quantity requirements by District - See Section 3. **(and/ or Section 4 as applicable)**
- b. Surface parking lots shall be kept to the minimum size required. Parking shall be screened from streets by either placement behind a structure, by fencing per Section 13.A.2 and/or landscaped per section 11.C.7.c except as provided in section 8.C.6.
- c. See Section 13.D for Common Parking Standards.
- d. ~~Refer to Section 3 for additional District specific parking standards.~~



Illustrative Photo: Neighborhood Daycare



Illustrative Photo: Neighborhood Church



Illustrative Photo: Neighborhood Retail

1. TYPE DESCRIPTION

The Neighborhood Goods and Services Buildings are intended to be stand-alone structures, 30,000 square feet and smaller, that contain uses that support the needs of the neighborhoods in which they are located. Typical examples of this type of building are pharmacies, daycare centers, churches, medical clinics and other office buildings.

2. APPLICABLE DISTRICTS

- a.  Village Mixed-Use (BMS-VMU) (3.B)
- b.  Neighborhood Collector (BMS-NC) (3.C)

3. STREETScape

- a. The scale of the buildings and associated parking shall retain a neighborhood scale.
- b. In the Neighborhood Collector District (BMS-NC), the building is encouraged to be sited on corner lots at the intersection of two Collector Streets along the main gateway entry points to the neighborhoods.

4. LOT SIZE

- a. Width: Maximum 300 ft.
- b. Depth: Maximum None
- c. See applicable District Standards in Section 3 for required setbacks and Build-to-Lines.

5. ACCESS

- a. The main building entry shall generally front onto the Collector Street.
- b. Services, including utility access, above ground equipment and trash containers shall be located to the rear of the building or off of the Alley, if provided.
- c. See Section 3 for additional District-specific building height standards.

6. BUILDING SIZE AND MASSING

- a. Maximum number of stories: 3
- b. Massing and scale compatible with surrounding neighborhood.
- c. See Section 3 for additional District-specific building height standards.

7. FRONTAGES

- a. Allowed Frontage Types and Referenced Sections for the Neighborhood Goods and Services Building are:
 - (1) Storefront (9.B)
 - (2) Arcade (9.C)
 - (3) Gallery (9.D)
 - (4) Forecourt (9.E)
 - (5) Greenbelt (9.F)
- b. Refer to Section 9 for Frontage Type definitions and standards.
- c. Due to the general nature of this Building Type, other Frontages may be allowed if they promote an active, pedestrian-oriented streetscape.
- d. Refer to Section 3 for applicable District standards for allowed encroachments into required setbacks.

8. LANDSCAPE STANDARDS

- a. ~~The Common Landscape standards in 11.C and the Commercial Landscape standards set forth in Section 11.D are applicable to Neighborhood Goods and Services Buildings.~~
See

9. SUSTAINABLE STANDARDS


- a. ~~The Common standards in 12.C and the Non-Residential Sustainable standards set forth in Section 12.D are applicable to Neighborhood Goods and Services Buildings.~~
See

10. SITE IMPROVEMENT STANDARDS

- a. ~~The Standards set forth in Section 13 are applicable to Neighborhood Goods and Services Buildings.~~
See

11. PARKING

- a. Commercial parking quantity requirements by District - See Section 3 ~~(and/ or Section 4 as applicable)~~
- b. Surface parking lots shall be kept to the minimum size required. Parking shall be screened from the streets by either placement behind a structure, by fencing per Section 13.A.2 and/or landscaped per Section 11.C.7.c except as provided in 8.C.6.
- c. See Section 13.D for Common Parking Standards.
- d. ~~Refer to Section 3 for additional District specific parking standards.~~

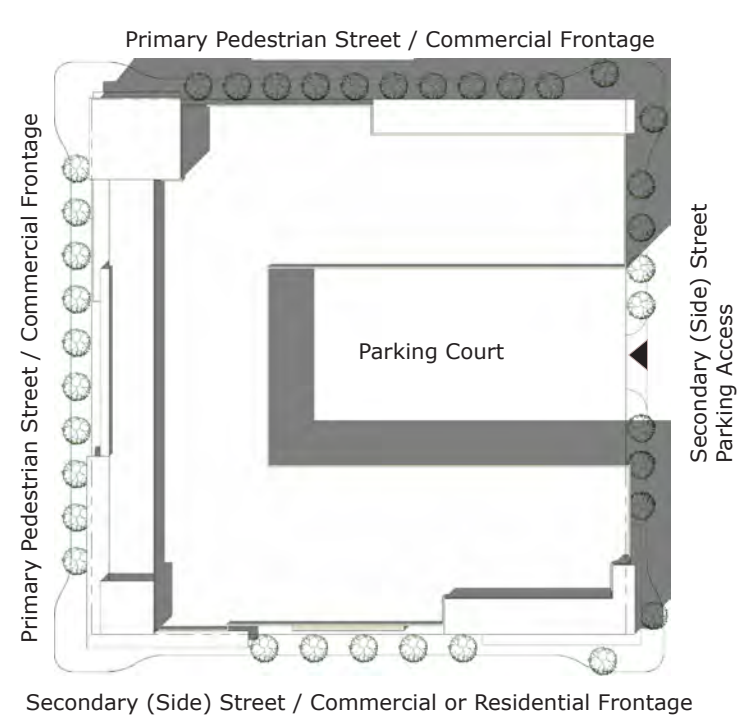

Illustrative Plan Diagram

1. TYPE DESCRIPTION

The Commercial / Mixed-Use / Liner Building Type is utilized to define the commercial street/block frontage in the Badger Mountain South Village Mixed-Use centers. In this type the building lines the block face, while concealing parking behind to create a pedestrian friendly environment and to promote an active commercial streetscape. This Building Type can accommodate a variety of ground floor commercial occupancies including: retail, service, and office uses. Ground floor residential units may be provided on Secondary Streets. Upper floors may contain these same uses, or residential units.


2. APPLICABLE DISTRICTS

- a. Village Mixed-Use (BMS-VMU) (3.B)
- b. Neighborhood Collector (BMS-NC) (3.C)

3. STREETScape

- a. The ground floor commercial component shall promote an active pedestrian environment through the use of large storefront windows, merchandise display, outdoor dining, overhead weather protection and wide sidewalks, etc. The pedestrian environment is uninterrupted by vehicles to the maximum extent possible.
- b. Ground floor residential uses are allowed on Secondary Street frontages only and may be Live/Work, loft, townhouse or similar configurations with direct street access.
- c. Ground floor residential units shall be setback from the property line horizontally a minimum of 5 ft. with a landscape buffer. Porch or Stoop frontage may extend to the Build-to-Line.
- d. In order to maximize “eyes-on-the-street” and an active streetscape, balconies and patios are encouraged for residential street frontages.
- e. Variety in building height is encouraged along a block face.

4. LOT SIZE

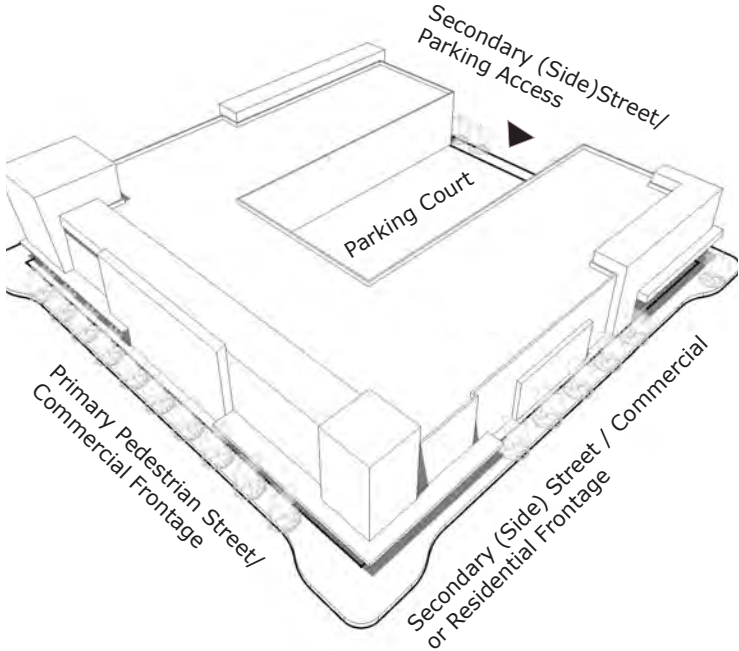

Illustrative Axonometric Diagram

- a. Width: Minimum 25 ft., Maximum 400 ft.*
*Maximum 150 ft. in BMS-NC District.
- b. Depth: None
- c. See applicable District Standards in Section 3 for required setbacks and Build-to-Lines.

5. ACCESS

- a. The main entrance to the ground floor commercial component should be accessed directly from and face the primary street.
- b. The commercial component access should comply with one of the allowed frontage types.
- c. The commercial frontage shall be uninterrupted by vehicle access. Parking and access for delivery truck / service vehicles should be located behind the building and be accessed from a secondary street.
- d. Ground floor residential uses must provide access directly from the street. Secondary access may be provided by an interior corridor.
- e. Upper level uses shall be accessed by a separate street level entry lobby.
- f. Elevator access should be provided to upper levels, as required by the International Building Code (IBC).
- g. Services, including utility access, above ground equipment and trash containers shall be located behind the building or screened from view.



Illustrative Photo: Commercial Mixed-Use Varied Streetscape

6. BUILDING SIZE AND MASSING

- a. Maximum number of stories: 4, or as limited by District-specific standards.
- b. Ground floor commercial space shall have a minimum depth of 30 ft.
- c. Refer to Section 3 for additional District-specific building height standards.

7. FRONTAGES

- a. Allowed Frontage Types for Commercial / Mixed-Use / Liner Buildings are:
 - (1) Storefront (9.B)
 - (2) Arcade (9.C)
 - (3) Gallery (9.D)
 - (4) Forecourt - Limited to one per block face. (9.E)
 - (5) Porch (residential use only) (9.G)
 - (6) Stoop (residential use only) (9.H)
- b. Refer to Section 9 for Frontage Type definitions and standards.
- c. Refer to Section 3 for applicable District standards for allowed encroachments into required setbacks.

8. LANDSCAPE STANDARDS

- a. ~~The Common standards in 11.C and Commercial Landscape standards set forth in Section 11.D are applicable to Commercial / Mixed-Use / Liner Buildings.~~

9. SUSTAINABLE STANDARDS

- a. ~~The Common standards in 12. C and Non-residential Sustainable standards set forth in Section 12.D are applicable to Commercial / Mixed-Use / Liner Buildings.~~




Illustrative Photo: Residential Units above Retail Frontage

10. SITE IMPROVEMENT STANDARDS

- a. ~~The Standards set forth in Section 13 are applicable to Commercial / Mixed-Use / Liner Buildings.~~

11. PARKING STANDARDS

- a. Parking may be provided in a surface parking court or in a structured parking garage preferably located behind the building frontage.
- b. Commercial parking quantity requirements by District - See Section 3 (and/ or Section 4 as applicable)
- c. ~~Residential parking quantity requirements by District - See Section 3.~~
- d. Tandem parking stalls are allowed to be used for individual residential units only.
- e. Off-street parking should not be visible from the Primary Street (i.e. screened by the building). Parking should be screened from Secondary Streets by either placement behind a structure, by fencing per Section 13.A.2 and/or landscaped per Section 11.C.7.c.
- f. See Section 13.D for Common Parking Standards.
- g. ~~Refer to Section 3 for additional District-specific parking standards.~~

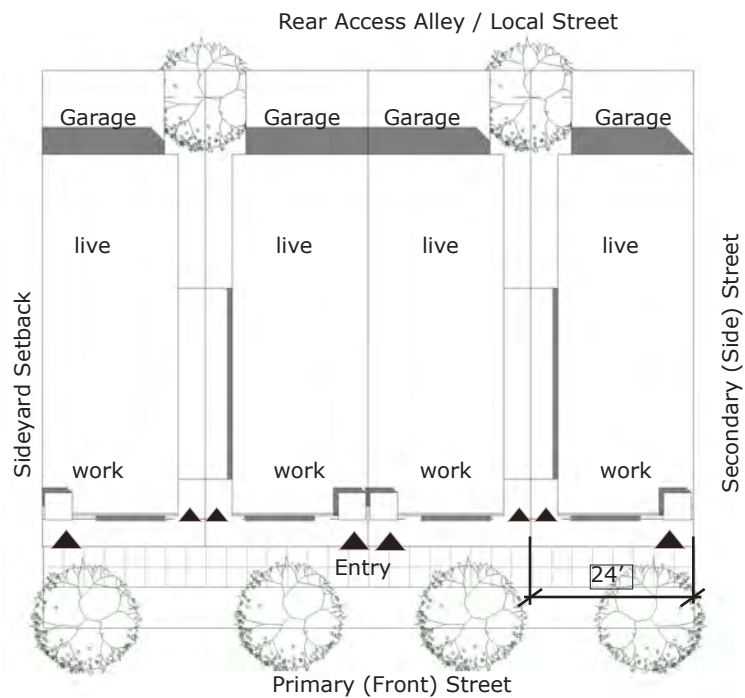

Illustrative Plan Diagram

1. TYPE DESCRIPTION

The Live/Work Building Type contains integrated housing units and working spaces, occupied and utilized by a single household, in either a Single-Family or Multi-family (side by side) configuration. The work component portion of the building is located at ground level with direct sidewalk access.


2. APPLICABLE DISTRICTS

The Live/Work Building Type is allowed in:

- a. Village Mixed-Use (BMS-VMU) (3.B)
- b. Neighborhood Collector (BMS-NC) (3.C)

3. STREETScape

- a. The ground floor work component portion of the building shall promote an active commercial environment with large windows, signage, overhead weather/sun protection, etc.
- b. In the BMS-NC District, a landscaped separation between buildings of at least 12 ft. wide is encouraged every 200 ft., or 8 units, whichever is less.
- c. Variety in building height is encouraged along a block face.

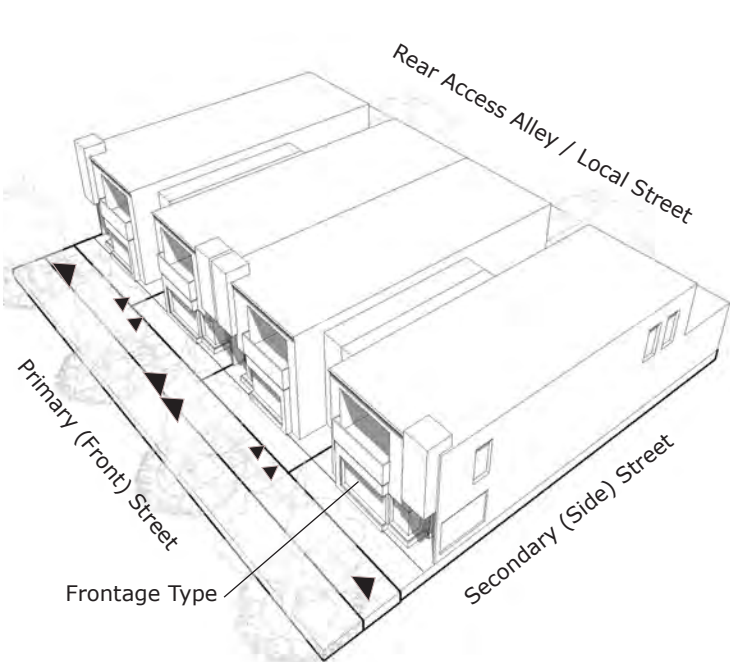

Illustrative Axonometric Diagram

4. LOT SIZE

- a. Width: Minimum 24 ft.
- b. Depth: Minimum 90 ft.
- c. See applicable District Standards in Section 3 for required setbacks and Build-to-Lines.

5. ACCESS

- a. The main entrance to the ground floor work component shall be accessed directly from and face the Primary (Front) Street. Corner buildings may have access on Secondary (Side) Street.
- b. The work component access shall comply with one of the allowed frontage types.
- c. Residential units may be accessed by a separate entrance and by a stair. If a separate entrance is provided, the residential access shall be secondary to the work component access.
- d. Garages and services shall be accessed from a rear Alley / Local Street.
- e. Services, including utility access, above ground equipment and trash containers shall be located off of the Alley / Local Street.

6. BUILDING SIZE AND MASSING

- a. Maximum number of stories: 3
- b. The massing of the overall primary facade of the building shall be designed such that each individual unit/work component is clearly expressed.
- c. Refer to Section 3 for additional District-specific building height standards.



Illustrative Photo: Urban Character Live/Work Building

7. FRONTAGES

- a. Each Live/Work unit shall provide a ground floor level work component fronting on the primary street. The work component shall be a minimum of 12 ft. in depth and 100% of Frontage (less residential entry and stair, if provided).
- b. The work component shall not be used as a part of the residential unit.
- c. Each dwelling unit shall have an individual entry access frontage.
- d. Allowed Frontage Types for Live/Work units are:
 - (1) Storefront (9.B)
 - (2) Arcade (9.C)
 - (3) Gallery (9.D)
 - (4) Forecourt (9.E)
 - (5) Porch (9.G)
 - (6) Stoop (9.H)
- e. Refer to Section 9 for Frontage Type definitions and standards.
- f. Refer to Section 3 for applicable District standards for allowed encroachments into required setbacks.

8. LANDSCAPE STANDARDS

- a. ~~The Common Landscape standards in 11.C apply to all Live/Work Buildings.~~
- b. ~~The Commercial Landscape standards set forth in Section 11.D are applicable to Live/Work Buildings in the BMS-VMU District.~~
- c. ~~The Multi-family Landscape standards set forth in Section 11.E are applicable to Live/Work Buildings in the BMS-NC District.~~



Illustrative Photo: Residential Character Live/Work Building

9. SUSTAINABLE STANDARDS

- a. ~~The Common standards in 12.C and the Residential Sustainable standards set forth in Section 12.E are applicable to Live/Work Buildings.~~


10. SITE IMPROVEMENT STANDARDS

- a. ~~The Standards set forth in Section 13 are applicable to Live/Work Buildings.~~

11. PARKING

- a. At least one required parking space shall be in a garage, either attached to or detached from the dwelling and accessed from an Alley / Local Street.
- b. Commercial parking quantity requirements by District - See Section 3.
- c. ~~Residential parking quantity requirements by District - See Section 3.~~
- d. Tandem parking stalls are allowed to be used for individual Residential units only.
- e. Surface parking, if provided should be screened from the Primary and Secondary streets by either placement behind a structure, by fencing per section 13.A.2 and/or landscaped per Section 11.C.7.c.
- f. See Section 13.D for Common Parking Standards.
- g. ~~Refer to Section 3 for additional District specific parking standards.~~

BUILDING AND DEVELOPMENT STANDARDS FOR
8.H STACKED UNIT BUILDING

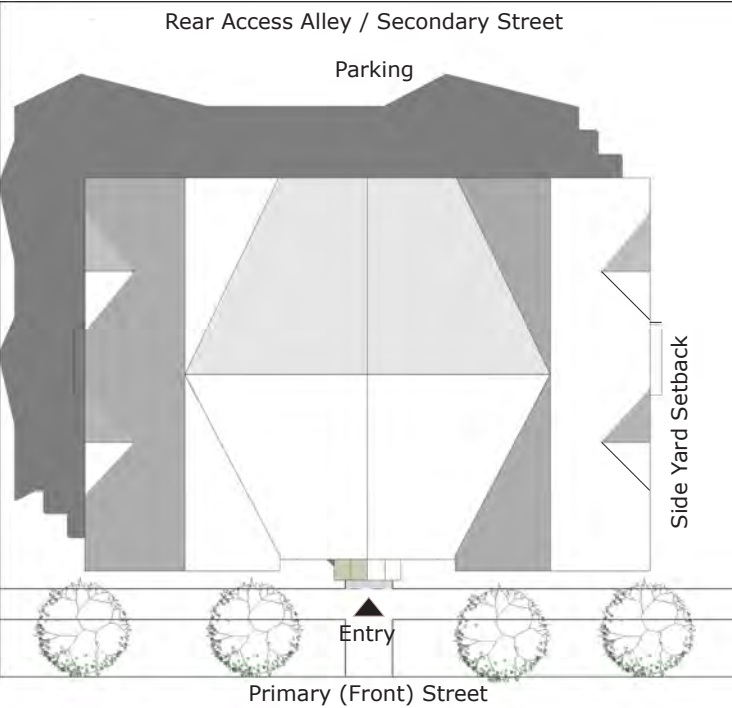

Illustrative Plan Diagram

1. TYPE DESCRIPTION


The Stacked Unit Building Type, commonly known as an Apartment, is a Multi-family residential only structure consisting of a number of dwellings units arranged side by side and stacked on multiple floors. Unit types may be either single level (flats) or multi-floor (townhouse).

2. APPLICABLE DISTRICTS

- a.  Village Mixed-Use (BMS-VMU) (3.B)
- b.  Neighborhood Collector (BMS-NC) (3.C)

3. STREETScape

- a. In the BMS-VMU District, Stacked Unit Buildings require ground floor units to have direct street access. Secondary access may be provided through interior corridor.
- b. In order to provide an active pedestrian oriented streetscape in the BMS-NC District, ground floor residential units are encouraged to provide access directly from the street. Secondary access may be provided through interior corridor.
- c. In order to maximize "eyes-on-the-street" and an active streetscape, balconies and patios are encouraged at street frontages.
- d. Variety in building height, materials and colors is encouraged along a block face.

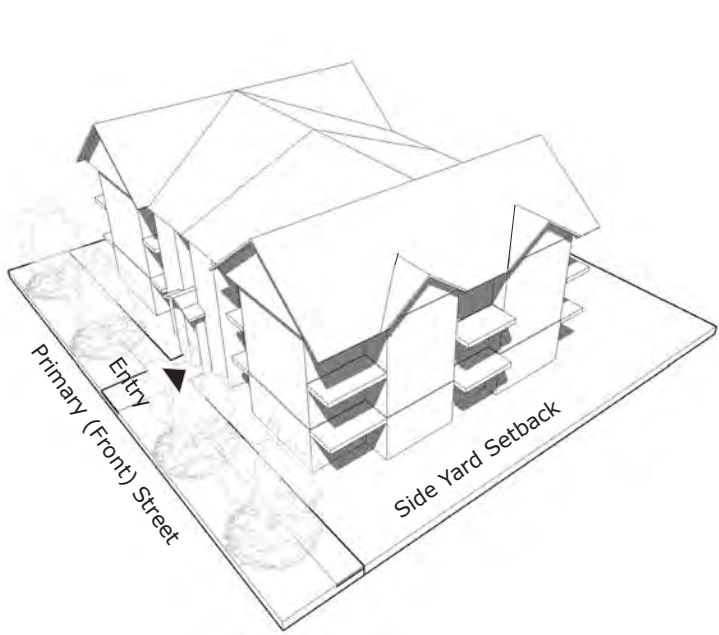

Illustrative Axonometric Diagram

4. LOT SIZE

- a. Width: Minimum None, Maximum 200 ft.
- b. Depth: Minimum 90 ft.
- c. See applicable District Standards in Section 3 for required setbacks and Build-to-Lines.

5. ACCESS

- a. The main entrance lobby to the building shall be accessed directly from and face the Primary (Front) Street where practical.
- b. Ground floor residential units may either be accessed directly from the street and/or from an interior corridor, as required per District.
- c. Upper floor units in the BMS-VMU District should be accessed from an interior corridor.
- d. Upper floor units in the BMS-NC District may be accessed from an interior corridor or from exterior stairs (walk-up).
- e. Elevator access may be provided to upper levels, as required by the International Building Code (IBC).
- f. Garages and services shall be accessed from a rear Alley / Local Street. This type is not allowed on a lot without an Alley / Local Street.
- g. Services, including utility access, above ground equipment and trash containers shall be located off of the Alley.

6. BUILDING SIZE AND MASSING

- a. Maximum number of stories: 3
- b. Refer to Section 3 for additional District-specific building height standards.



Illustrative Photo: Contemporary Apartment Building

7. FRONTAGES

- a. The main entrance shall be prominent along the street facing facade. Ground floor units with direct street access shall utilize an allowed Frontage Type.
- b. Allowed Frontage Types for Stacked Units are:
 - (1) Forecourt (9.E)
 - (2) Greenbelt (9.F)
 - (3) Porch (9.G)
 - (4) Stoop (9.H)
- c. Refer to Section 9 for Frontage Type definitions and standards.
- d. Refer to Section 3 for applicable District standards for allowed encroachments into required setbacks.

8. LANDSCAPE STANDARDS

- a. The Common standards in 11.C and Multi-family Landscape standards set forth in Section 11.E.2 are applicable to Stacked Unit Buildings.

9. SUSTAINABLE STANDARDS

- a. ~~The Common standards in 12. C and Residential Sustainable standards set forth in Section 12.E are applicable to Stacked Unit Buildings.~~ See

10. SITE IMPROVEMENT STANDARDS


- a. ~~The Standards set forth in Section 13 are applicable to Stacked Unit Buildings.~~ See



Illustrative Photo: Traditional Walk-up Apartment Building

11. PARKING

- a. Parking may be provided in a surface parking lot, below grade parking structure or in detached parking garages accessed from the Alley / Local Street.
- b. Residential parking quantity requirements by District - See Section 3.
- c. Dwellings may have indirect access to their parking stalls
- d. Tandem parking stalls are allowed to be used for individual residential units.
- e. Surface parking, if provided, should be screened from the Primary and Secondary Streets by either placement behind a structure, by fencing per Section 13.A.2 and/or landscaped per Section 11.C.7.c.
- f. See Section 13.D for Common Parking Standards.
- g. ~~Refer to Section 3 for additional District-specific parking standards.~~

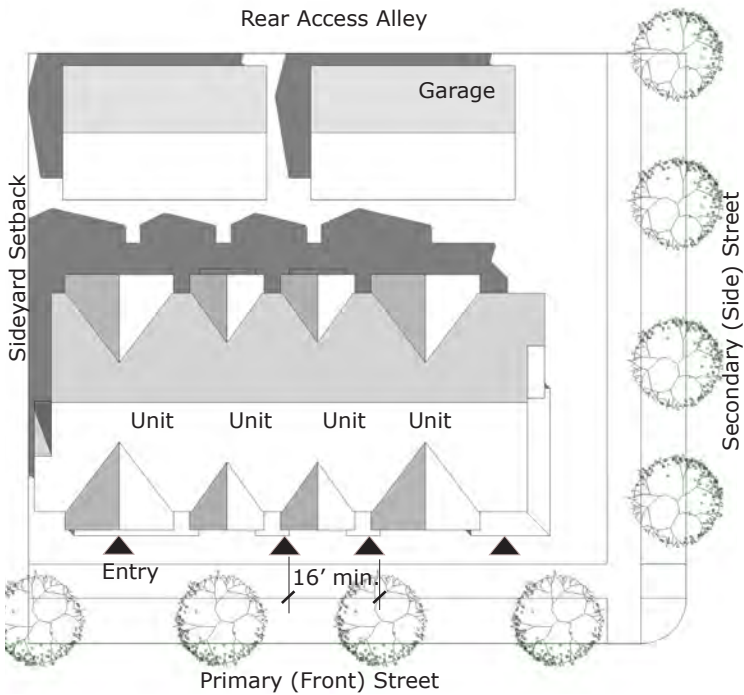

Illustrative Plan Diagram

1. TYPE DESCRIPTION

The Row House Building Type is a structure of townhouse (multi-level) unit types arranged side by side in a zero lot line configuration. Residential units in Row Houses have individual entrances along the frontage. Entry porches, stoops and raised front yards create a strong presence along the streetscape.


2. APPLICABLE DISTRICTS

The Row House Building Type is allowed in:

- a. Village Mixed-Use (BMS-VMU) (3.B)
- b. Neighborhood Collector (BMS-NC) (3.C)

3. STREETScape

- a. Break up long lines of Row Houses to provide visual relief and pedestrian access to Alleys.
- b. Provide a landscaped separation between buildings of at least 12 ft. wide every 200 ft. or 8 units, whichever is less.
- c. Corner lots should be wider to accommodate the side street setback along the street and to allow for building articulation and side porches.
- d. Variation in building height, materials and colors is required for multiple row house buildings along a streetscape.
- e. Place garages for end units toward the street to shield any adjacent surface parking.

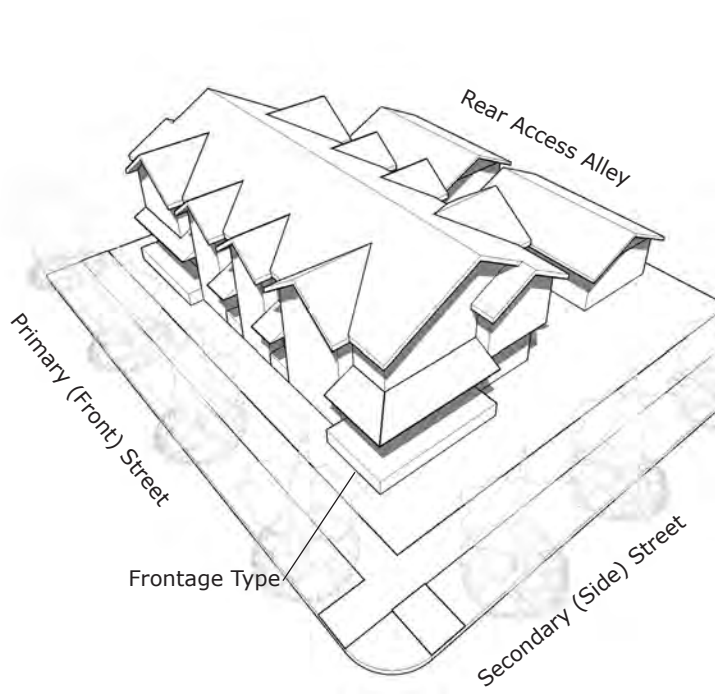

Illustrative Axonometric Diagram

4. LOT SIZE

- a. Width: Minimum 16 ft.
- b. Depth: Minimum 70 ft. (with attached garage)
- c. See applicable District Standards in Section 3 for required setbacks and Build-to-Lines.

5. ACCESS

- a. The main entrance to each unit shall be accessed directly from and face the Primary (front) street where applicable. Corner buildings may have access on Secondary (side) street.
- b. Primary access shall comply with one of the allowed frontage types.
- c. Garages and services shall be accessed from a rear Alley or local street.
- d. Services, including utility access, above ground equipment and trash containers shall be located off of the Alley or screened from Primary (front) street.

6. BUILDING SIZE AND MASSING

- a. Maximum number of stories: 3
- b. In a three story building, a townhouse dwelling may be stacked over a ground floor flat. The flat must be accessed by it's own front door at the frontage, and the townhouse dwelling shall be accessed by a separate door and stair.
- c. In a three story building, a townhouse dwelling may be stacked over a garage. The garage must be separated from the street frontage by a habitable space at least 10' in depth.
- d. The massing of the overall primary facade of the building shall be designed such that each unit is clearly expressed.
- e. Refer to Section 3 for additional District-specific building height standards.



Illustrative Photo: Traditional Row House

7. FRONTAGES

- a. Each Row House ground floor level shall be designed so that habitable space is oriented toward the fronting Primary Street or open space.
- b. Each dwelling unit shall have an individual entry access Frontage.
- c. Allowed Frontage Types for Row Houses are:
 - (1) Forecourt (9.E)
 - (2) Greenbelt (9.F)
 - (3) Porch (9.G)
 - (4) Stoop (9.H)
- d. Refer to Section 9 for Frontage Type definitions and standards.
- e. Refer to Section 3 for applicable District standards for allowed encroachments into required setbacks.

8. LANDSCAPE STANDARDS

- a. ~~The Common standards in 11.C and Multi-family Landscape standards set forth in Section 11.E.2 are applicable to Row Houses.~~

9. SUSTAINABLE STANDARDS

- a. ~~The Common standards in 12. C and Residential Sustainable standards set forth in Section 12.E are applicable to Row Houses.~~

10. SITE IMPROVEMENT STANDARDS

- a. ~~The Standards set forth in Section 13 are applicable to Row Houses.~~




Illustrative Photo: Contemporary Row House with Stoop Frontage

11. PARKING

- a. At least one required parking space shall be in a garage, either attached to or detached from the dwelling.
- b. Additional parking may be provided in a surface parking lot accessed from the Alley / Local Street.
- c. Residential parking quantity requirements by District - See Section 3.
- d. Dwellings may have direct or indirect access to their parking stalls.
- e. Tandem parking stalls are allowed to be used for individual residential units.
- f. Surface parking, if provided, shall be screened from the Primary and Secondary Streets by either placement behind a structure, by fencing per Section 13.A.2 and/or landscaped per Section 11.C.7c.
- g. See Section 13.D for Common Parking Standards.
- h. ~~Refer to Section 3 for additional District-specific parking standards.~~

BUILDING AND DEVELOPMENT STANDARDS FOR
8.J COURTYARD HOUSING

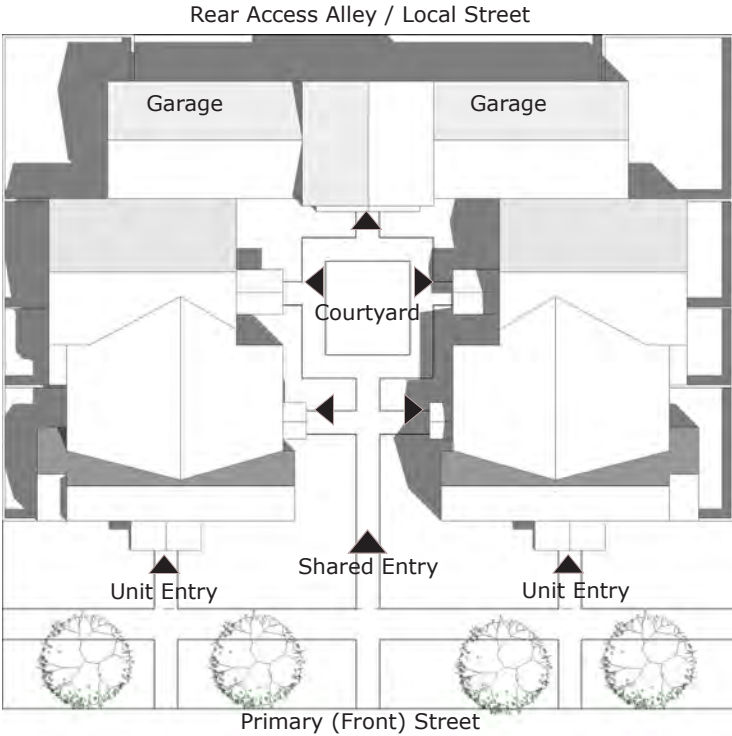

Illustrative Plan Diagram

1. TYPE DESCRIPTION


The Courtyard Housing Building Type consists of Multi-family residential units arranged around a central court. The court is open to the facing street. Residential units may be in stacked units, townhouses, or both.

2. APPLICABLE DISTRICTS

- a.  Neighborhood Collector (BMS-NC) (3.C)
- b.  Neighborhood General (BMS-NG) (3.D)

3. STREETScape

- a. The shared courtyard shall be partially or wholly open to the street.
- b. Portions of buildings adjacent to the frontage line shall address the street with building entries, allowed frontage types and windows such that it is considered a front facade.

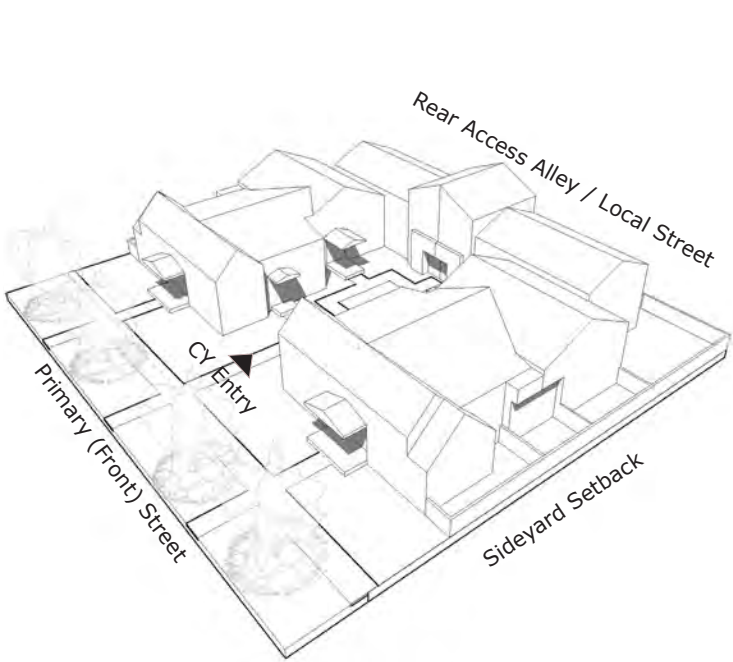

Illustrative Axonometric Diagram

4. LOT SIZE

- a. Width: Minimum 125 ft.
- b. Depth: Minimum 100 ft.
- c. See applicable District Standards in Section 3 for required setbacks and Build-to-Lines.

5. ACCESS

- a. The main entry to each ground floor unit is directly off the common courtyard, or from the Primary (front) street.
- b. Upper level residential units shall be accessed by a courtyard level lobby or open stair.
- c. Garages and services shall be accessed from a rear Alley / Local Street.
- d. Services, including utility access, above ground equipment and trash containers shall be located off of the Alley.

6. BUILDING SIZE AND MASSING

- a. Maximum number of stories: 2.5
- b. The overall scale of the building shall be minimized through the expression of individual units or unit stacks, designed to a house scale.
- c. Allow for maximum exposure to sunlight in the courtyard through building siting and massing.
- d. Varied building heights are encouraged in the courtyard arrangement and should be utilized to maximize solar exposure to the courtyard.
- e. Refer to Section 3 for additional District-specific building height standards.



Illustrative Photo: Courtyard Apartments - Stacked Flats

7. FRONTAGES

- a. For Courtyard Housing, Frontages shall also apply to the internal courtyard facades.
- b. Allowed Frontage Types for Courtyard Housing Units are:
 - (1) Porch (9.G)
 - (2) Stoop (9.H)
- c. Refer to Section 9 for Frontage Type definitions and standards.
- d. Refer to Section 3 for applicable District standards for allowed encroachments into required setbacks.

8. LANDSCAPE STANDARDS

- a. ~~The Common standards in 11.C and Courtyard Landscape standards set forth in Section 11.E.3 are applicable to Courtyard Housing.~~

9. SUSTAINABLE STANDARDS

- a. ~~The Common standards in 12.C and Residential Sustainable standards set forth in Section 12.E are applicable to Courtyard Housing.~~

10. SITE IMPROVEMENT STANDARDS


- a. ~~The Standards set forth in Section 13 are applicable to Courtyard Housing.~~




Illustrative Photo: Courtyard Apartments - Townhouses

11. PARKING

- a. Parking may be provided in a surface parking lot or in attached or detached parking garages accessed from the Alley.
- b. Residential parking quantity requirements by District - See Section 3.
- c. Dwellings may have direct or indirect access to their parking stalls.
- d. Tandem parking stalls are allowed to be used for individual residential units.
- e. Surface parking, if provided, shall be screened from the Primary and Secondary Streets by either placement behind a structure, by fencing per Section 13.A.1 and/or landscaped per Section 11.C.7c.
- f. Parking is not allowed in the Courtyard.
- g. See Section 13.D for Common Parking Standards.
- ~~h. Refer to Section 3 for additional District specific parking standards.~~

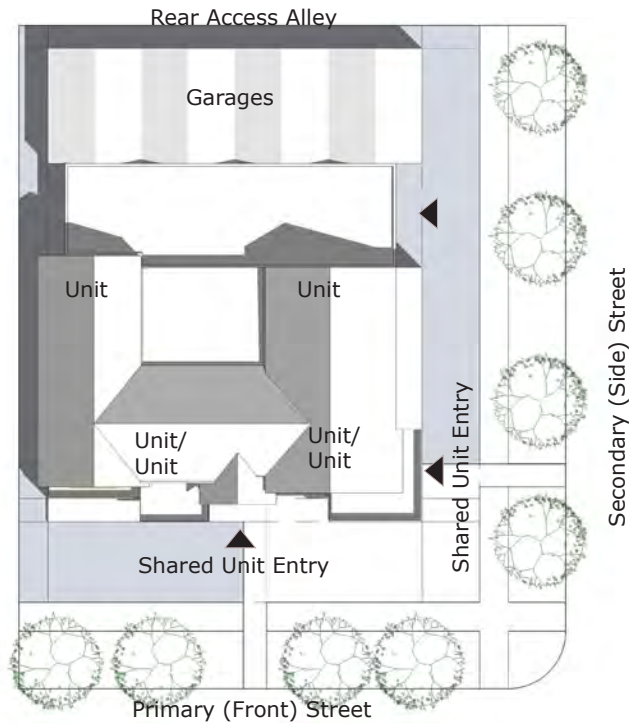

Illustrative Plan Diagram

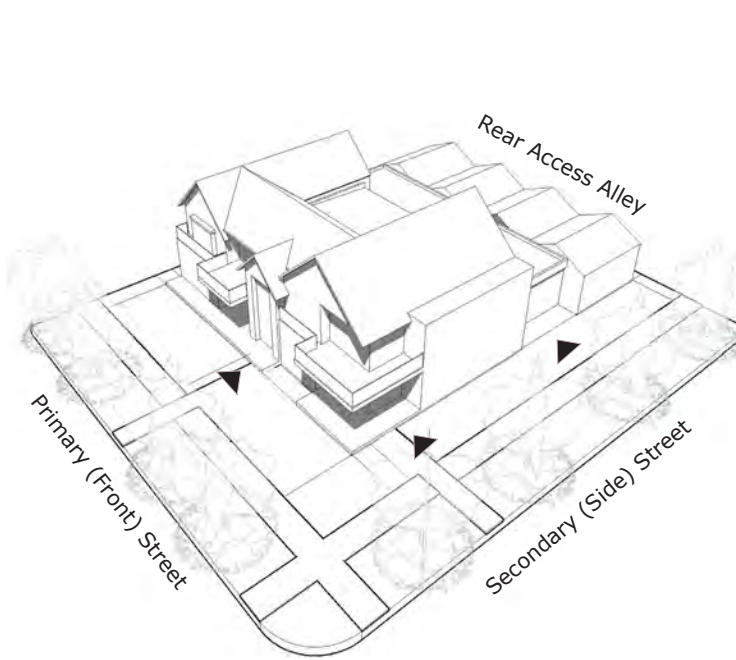

Illustrative Axonometric Diagram



Illustrative Photo: Corner Lot Mansion Apartment (6 units max.)



Illustrative Photo: Mid Block Mansion Apartment (4 units max.)

1. TYPE DESCRIPTION

The Mansion Apartment Building Type combines 3 to 6 residences within one structure designed to resemble a large Single-Family "mansion" in a typical neighborhood setting. The units may include stacked flats and/or townhouse units. This Building Type allows for Multi-family, higher density housing to be integrated within Single-Family residential neighborhoods, offering a variety of housing types and affordable options within the neighborhood.

2. APPLICABLE DISTRICTS

- a. Neighborhood Collector (BMS-NC) (3.C)
- b. Neighborhood General (BMS-NG) (3.D)

3. STREETScape

- a. Mansion Apartments shall be designed to be compatible with adjacent Single-Family houses.
 - (1) Mid-block: limited to a maximum of 4 units.
 - (2) Corner: limited to a maximum of 6 units.
- b. In order to maintain the scale of a large Single-Family House, entries to multiple units shall be combined to limit the number of individual entries visible from the street.
 - (1) Mid-block: 2 entries max. at street frontage.
 - (2) Corner: Must utilize both street frontages for entry locations.
- c. Mansion Apartments located in the Neighborhood General District (BMS-NG) shall be sited to lessen the impact on surrounding Single-Family homes as follows;
 - (1) Limited to block ends.
 - (2) Must be sited across from an open space.
- d. Each unit shall have one outdoor space directly accessible from a living area. The space may be provided as a covered porch, patio or balcony and must be at least 6 ft. deep and a total of 72 SF minimum.

4. LOT SIZE

- a. Width: Minimum 70 ft. , Maximum 100 ft.
- b. See applicable District Standards in Section 3 for required setbacks and Build-to-Lines.

5. ACCESS

- a. The main entrances to dwelling units shall be accessed directly from and face the Primary (Front) Street. Corner buildings shall also have access on Secondary (Side) Street.
- b. When located on a corner, Frontage Types and entries shall be provided on both elevations facing the street.
- c. Street frontage entries to multiple units shall be combined: 3-4 units = 2 entries max, 5-6 units = 3 entries max.
- d. If a surface parking lot is provided, the rear facade must also contain unit entries. These entries may be in addition to the maximum street frontages entries.
- e. Garages and services shall be accessed from a rear Alley. This type is not allowed on a lot without an Alley.
- f. Services, including utility access, above ground equipment and trash containers shall be located off of the Alley.

6. BUILDING SIZE AND MASSING

- a. Maximum number of stories: 2.5
- b. Building shall be designed to a scale and massing appropriate for a large Single-Family house.
- c. Refer to Section 3 for additional District-specific building height standards.

7. FRONTAGES

a. Allowed Frontage Types for Mansion Apartment are:

- (1) Forecourt (9.E)
- (2) Greenbelt (9.F)
- (3) Porch (9.G)
- (4) Stoop (9.H)

- b. Refer to Section 9 for Frontage Type definitions and standards.
- c. Refer to Section 3 for applicable District standards for allowed encroachments into required setbacks.

8. LANDSCAPE STANDARDS

- a. Since this Multi-family Building Type is designed to be integrated into a Single-Family neighborhood, the Common standards in 11.C and the Single-Family Landscape standards set forth in Section 11.E.1 ~~are applicable to Mansion Apartment Buildings.~~ **apply**

9. SUSTAINABLE STANDARDS

- a. ~~The Common standards in 12. C and Residential Sustainable standards set forth in Section 12.E are applicable to Mansion Apartment Buildings.~~ **remove extra space**


10. SITE IMPROVEMENT STANDARDS

- a. ~~The Standards set forth in Section 13 are applicable to Mansion Apartment Buildings.~~ **See**

11. PARKING

- a. Parking may be provided in a surface parking lot, in attached or detached parking garages accessed from the Alley.
- b. Residential Parking quantity requirements by District - See Section 3.
- c. Dwellings may have direct or indirect access to their parking stalls.
- d. Tandem parking stalls are allowed to be used for individual residential units.
- e. Surface parking, if provided, shall be screened from the Primary and Secondary Streets by wither placement behind a structure, by fencing per Section 13.A.1 and/or landscaped per Section 11.C.7.c.
- f. See Section 13.D for Common Parking Standards.
- g. ~~Refer to Section 3 for additional District specific standards.~~

BUILDING AND DEVELOPMENT STANDARDS FOR
8.L PAIRED HOUSE (DUPLEX)

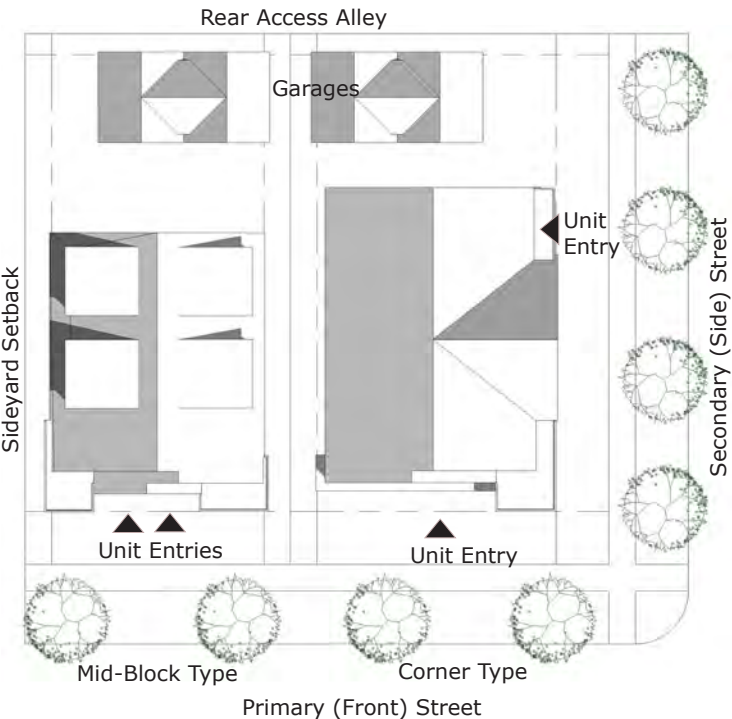

Illustrative Plan Diagram

1. TYPE DESCRIPTION


The Paired House Building Type, also known as a Duplex, combines two residences within one structure designed to resemble a Single-Family house in a typical neighborhood setting. The units may include stacked flats or side by side townhouse units. This Building Type allows for smaller scale Multi-family housing to be integrated within Single-Family residential neighborhoods, offering a variety of housing types and affordable options within the neighborhood.

2. APPLICABLE DISTRICTS

- a. Neighborhood Collector (BMS-NC) (3.C)
- b. Neighborhood General (BMS-NG) (3.D)

3. STREETScape

- a. In order to maintain the scale and context of a Single-Family house, entries to multiple units shall utilize one Frontage Type.
- b. The use of corner lots for Paired Houses is encouraged. Corner lots are ideally suited for the Building Type providing for individual unit entries on both street frontages and allowing this Multi-family housing type to blend more easily with adjacent Single-Family houses.
- c. On any block that contains four or fewer lots, Paired Houses are limited to one per block and the lot upon which the Paired House is allowed must be identified on the plat face.

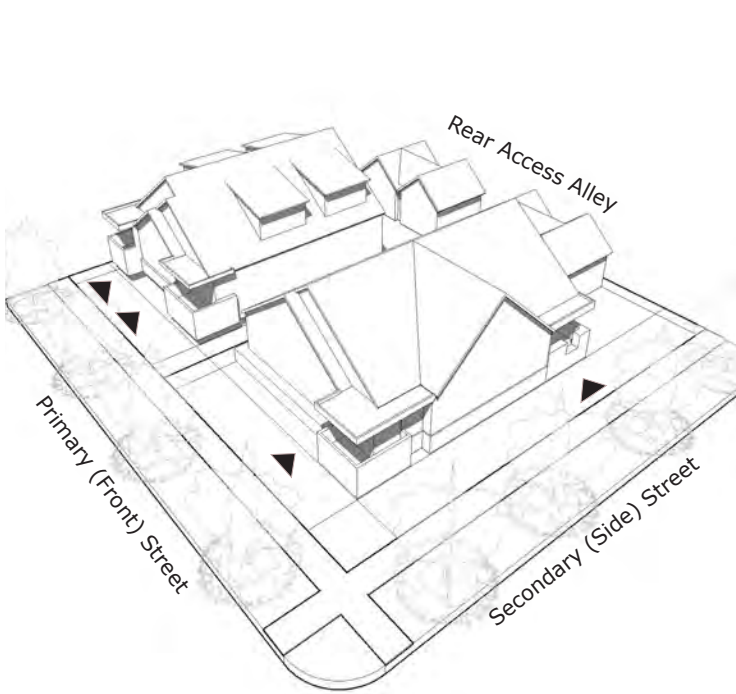

Illustrative Axonometric Diagram

4. LOT SIZE

- a. Width: Minimum 50 ft. , Maximum 70 ft. See section 5.c below for alternate width conditions.
- b. Depth: Minimum 100 ft.
- c. See applicable District Standards in Section 3 for required setbacks and Build-to-Lines.

5. ACCESS

- a. For mid-block buildings, the main entrances to units shall be accessed directly from and face the street. The mid-block units may have separate entries or may be combined in a single exterior entry. The main entrances to dwelling units shall be accessed directly from and face the Primary (front) street.
- b. Corner sites must utilize both street frontages for separate unit entries.
- c. The preferred access for garages and services is the rear Alley. When built on streets with front access residences, lot must be a minimum width of 100 ft. and driveways set apart by 30 ft., or, lot may be 80 ft. minimum width with shared drive to rear garage (side yard driveway access). When built on a corner lot condition, maximum width will be 74 ft. to allow a 10 ft. side yard.
- d. Services, including utility access, above ground equipment and trash containers shall be located off of the Alley, where present.

6. BUILDING SIZE AND MASSING

- a. Maximum number of stories: 2.5
- b. Building shall be designed to a scale and massing appropriate for a Single-Family house.
- c. Individual units may either be expressed or designed to resemble one large Single-Family house.
- d. Refer to Section 3 for additional District-specific building height standards.



Illustrative Photo: Corner Lot Duplex

7. FRONTAGES

- a. Allowed Frontage Types for Paired House are:
 - (1) Forecourt (9.E)
 - (2) Greenbelt (9.F)
 - (3) Porch (9.G)
 - (4) Stoop (9.H)
- b. Refer to Section 9 for Frontage Type definitions and standards.
- c. Refer to Section 3 for applicable District standards for allowed encroachments into required setbacks.

8. LANDSCAPE STANDARDS


- a. Since this Multi-family Building Type is designed to be integrated into a Single-Family neighborhood, the Common standards in 11.C and the Single-Family Landscape standards set forth in Section 11.E.1 are applicable to Paired Houses.

9. SUSTAINABLE STANDARDS

- a. ~~The Common standards in 12. C and Residential Sustainable standards set forth in Section 12.E are applicable to Paired Houses.~~ See

10. SITE IMPROVEMENT STANDARDS

- a. ~~The Standards set forth in Section 13 are applicable to Paired Houses.~~ See

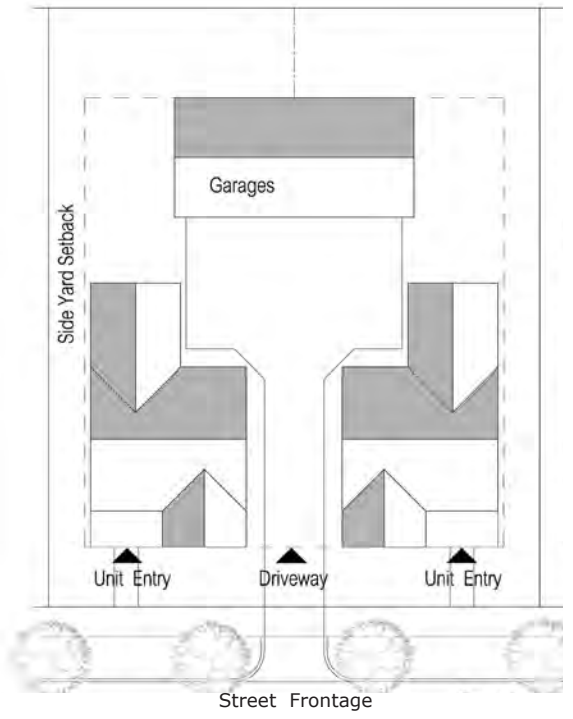


Illustrative Diagram: Mid-Block Duplex

11. PARKING

- a. Parking may be provided in attached or detached parking garages accessed from the Alley where provided. When built on a front load lot, garages shall be set back a minimum of 4 ft. from the front door or 16 ft. or more from the main front facade (side yard driveway access).
- b. Residential Parking quantity requirements by District - See Section 3.
- c. Dwellings may have direct or indirect access to their parking garages.
- d. Tandem parking stalls are allowed to be used for individual residential units.
- e. See Section 13.D for Common Parking Standards.
- f. Additional surface parking, with a minimum depth of 20 ft., may be provided adjacent to garage. Parking shall be screened from the Primary or Secondary streets by either placement behind a structure, by fencing per Section 13.A.1 and/or landscaped per Section 11.C.7.c.
- g. ~~Refer to Section 3 for additional District-specific parking standards.~~

12. ACCESSORY UNITS

- a. Accessory Units are allowed for the Paired Building Type. See Section 8.P for Accessory Unit Building Type Standards.

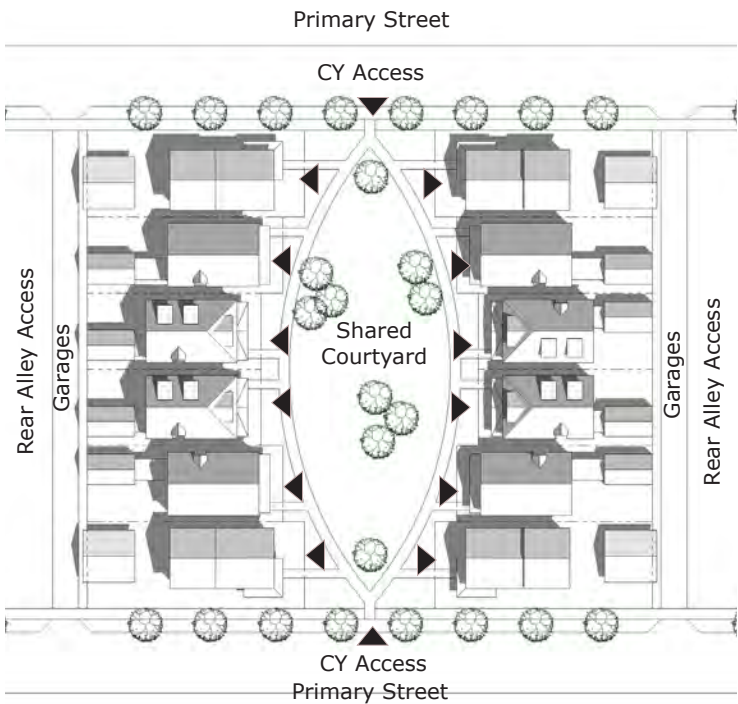

Illustrative Plan Diagram - Through Block Court

1. TYPE DESCRIPTION


The Cottage Court Building Type consists of free-standing Single-Family residences arranged around a common, shared courtyard. A shared common building may also be provided. House and lot sizes are smaller in comparison to others in the neighborhood. The trade-off for smaller lots is the large common courtyard which may contain a variety of uses: tot lot playground, community gardens, landscaped open space, etc.

2. APPLICABLE DISTRICTS

- a. Neighborhood General (BMS-NG) (3.D)

3. STREETScape

- a. The courtyard shall be either partially or wholly open to the street. The street frontage may be open or maintained by a hedge or low fence. The courtyard entry may be defined by an arbor or similar element but should not be gated.
- b. The courtyard may span an entire block width to provide a mid-block pedestrian connection.
- c. Cottage courts may be wholly open to the street in a corner configuration, serving as a open space to the neighborhood.
- d. Consider locating courtyard open space at terminated vistas at perpendicular streets.
- e. The shared open space and individual houses of Cottage Courts can soften the transition between Districts of higher densities (i.e. BMS-NC to BMS-NG).
- f. Cottage Courts offer solutions for development of irregular shaped blocks.
- g. Portions of buildings adjacent to the street frontage shall address the street with corner elements (i.e. wrap around porch), articulation and windows similar to a front facade.

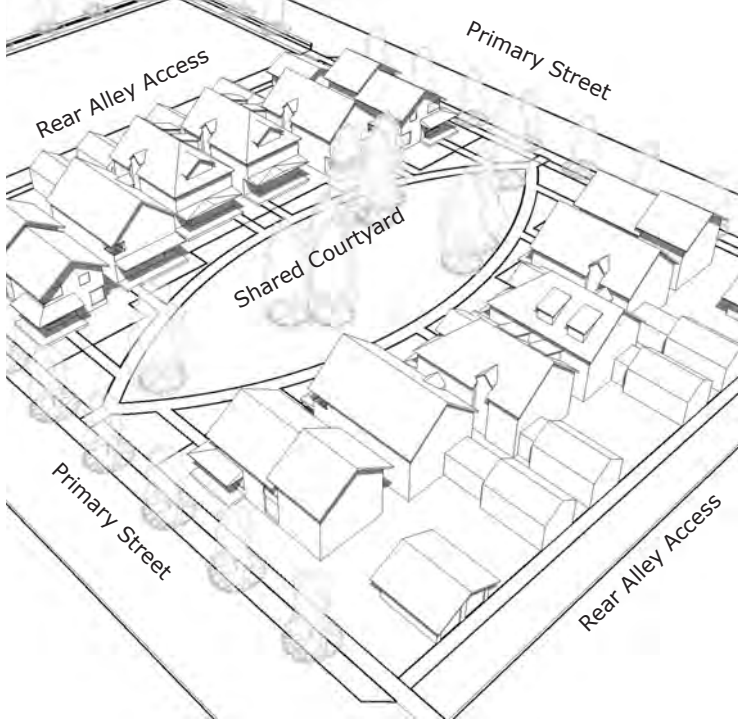

Illustrative Axonometric Diagram - Through Block Court

4. LOT SIZE

- a. Width: Minimum 35 ft.
- b. Depth: Minimum 70 ft.
- c. See applicable District Standards in Section 3 for required setbacks and Build-to-Lines.

5. ACCESS

- a. The main entrances to dwelling units shall be accessed directly from the courtyard. Units that are adjacent to the street frontage may be accessed from the street (i.e. corner porch).
- b. Garages and services shall be accessed from an Alley. This type is not allowed on a lot without an Alley.
- c. Services, including utility access, above ground equipment and trash containers shall be located off of the Alley.

6. BUILDING SIZE AND MASSING

- a. Maximum number of stories: 2
- b. Massing of houses shall be of a smaller scale, compact configuration.
- c. Allow for maximum exposure to sunlight in the courtyard through building siting and massing.
- d. Refer to Section 3 for additional District-specific building height standards.



Illustrative Photo: Mid Block Cottage Court

7. FRONTAGES

- a. For Cottage Courts, Frontages shall also apply to the internal courtyard facades.
- b. Allowed Frontage Types for Cottage Courts are:
 - (1) Porch (9.G)
 - (2) Stoop (9.H)
- b. Refer to Section 9 for Frontage Type definitions and standards.
- c. Refer to Section 3 for applicable District standards for allowed encroachments into required setbacks.

8. LANDSCAPE STANDARDS

- a. ~~The Common standards in 11.C and the Courtyard Landscape standards set forth in Section 11.E.3 are applicable to Cottage Courts.~~

9. SUSTAINABLE STANDARDS

- a. ~~The Common standards in 12. C and Residential Sustainable standards set forth in Section 12.E are applicable to Cottage Courts.~~

10. SITE IMPROVEMENT STANDARDS

- a. ~~The Standards set forth in Section 13 are applicable to Cottage Courts.~~



Illustrative Photo: Corner Block Cottage Court


11. PARKING

- a. Parking may be provided in attached or detached parking garages accessed from the Alley.
- b. Small surface lots may be provided off of Alley for additional parking.
- c. Residential Parking quantity requirements by District - See Section 3.
- d. Dwellings may have direct or indirect access to their garages.
- e. Tandem parking stalls are allowed to be used for individual residential units.
- f. Additional surface parking may be provided adjacent to garage for Accessory Unit or Home Occupation use. Parking shall be setback 20 ft. from Alley easement.
- g. Surface parking, if provided, shall be screened from the Primary and Secondary Streets by either placement behind a structure, by fencing per Section 13.A.1 and/or landscaped per Section 11.C.7.c.
- h. Parking is not allowed in the Courtyard.
- i. See Section 13.D for Common Parking Standards.
- ~~j. Refer to Section 3 for additional District-specific building height standards.~~


12. ACCESSORY UNITS

- a. Accessory Units are allowed for the Cottage Court Building Type. See Section 8.P for Accessory Unit Building Type Standards.

BUILDING AND DEVELOPMENT STANDARDS FOR
8.N SINGLE-FAMILY HOUSE - ALLEY ACCESS

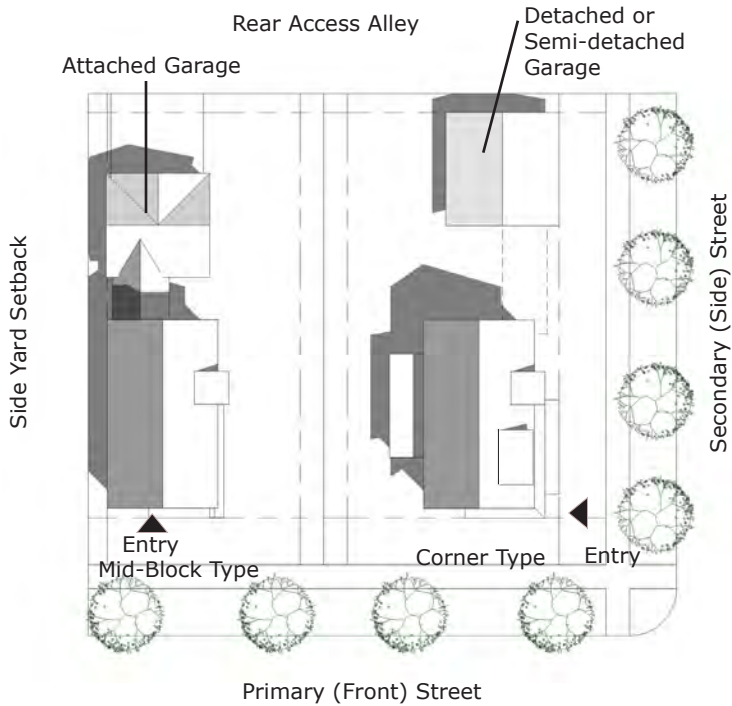

Illustrative Plan Diagram

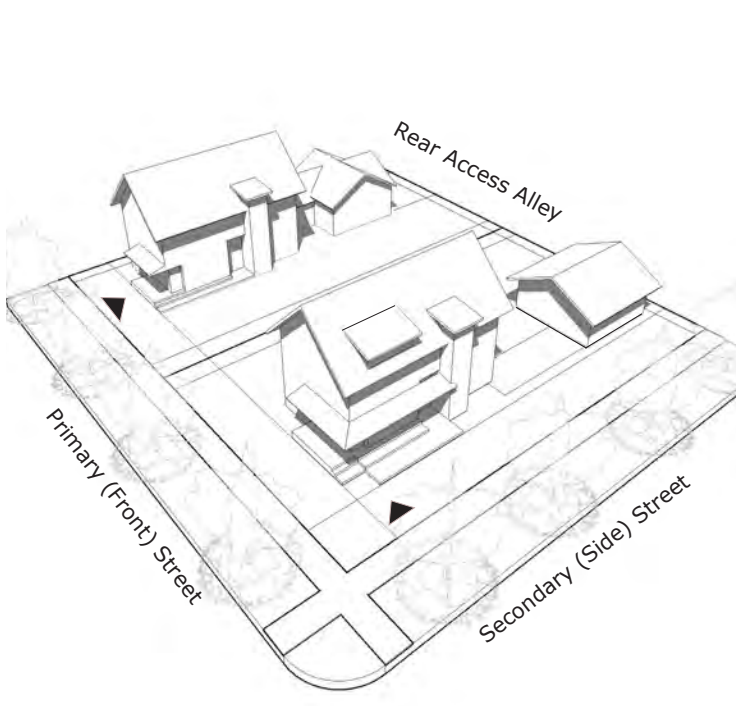

Illustrative Axonometric Diagram



Illustrative Photo: Corner Lot Single-Family House



Illustrative Photo: Mid-Block Single-Family House

1. TYPE DESCRIPTION

The Single-Family House - Alley Access Building Type is a structure that accommodates one primary residence. Garages are accessed by a rear Alley. Home Occupations may also be allowed per District standards. A variety of lot sizes will allow for a diverse range of Single-Family homes in order to respond to the needs of different households, house sizes and affordability levels.

2. APPLICABLE DISTRICTS

- a. Neighborhood Collector (BMS-NC) (3.C)
- b. Neighborhood General (BMS-NG) (3.D)
- c. Neighborhood Edge (BMS-NE) (3.E)

3. STREETScape

- a. Streetscape diversity is achieved through different models and architectural styles.
- b. Each block face shall contain at least three different models. Different models are defined as those with significant variation in floor plan configuration and minor variation in size or number of bedrooms.
- c. Each of the three models must have at least two architectural styles and color schemes. To further differentiate models, vary wall colors and materials.
- d. Not more than two of the same model with the same architectural style can be used on a block face.
- e. Variety in building height is encouraged along a block face.

4. LOT SIZE

- a. Width: Minimum 40 ft.
- b. Depth: Minimum 100 ft.
- c. See applicable District Standards in Section 3 for required setbacks and Build-to-Lines.

5. ACCESS

- a. The main entry to the building shall be accessed directly from and face the Primary (Front) Street. Corner buildings may have access on Secondary (Side) Street.
- b. Garages and services may be accessed from a rear Alley. This type is not allowed on a lot without an Alley.
- c. Services, including utility access, above ground equipment and trash containers should be located off of the Alley.

6. BUILDING SIZE AND MASSING

- a. Maximum number of stories: 2.5
- b. Height may be increased to 3 stories in the BMS-NE District.
- c. Refer to Section 3 for additional District-specific building height standards.

7. FRONTAGES

- a. Allowed Frontage Types for Single-Family Houses are:
 - (1) Forecourt (9.E)
 - (2) Porch (9.G)
 - (3) Stoop (9.H)
 - (4) Greenbelt Frontage (9.F)
- b. Refer to Section 9 for Frontage Type definitions and standards.
- c. Refer to Section 3 for applicable District standards for allowed encroachments into required setbacks.

8. LANDSCAPE STANDARDS

- a. ~~The Common standards 11.C and the Single-Family Landscape standards set forth in Section 11.E.1 are applicable to Single-Family Houses.~~

9. SUSTAINABLE STANDARDS

- a. ~~The Common standards in 12. C and Residential Sustainable standards set forth in Section 12.E are applicable to Single-Family Houses.~~

10. SITE IMPROVEMENT STANDARDS


- a. ~~The Standards set forth in Section 13 are applicable to Single-Family Houses.~~

11. PARKING


- a. Residential Parking quantity requirements by District - See Section 3.
- b. Parking may be provided in attached, semi-detached, or detached garages accessed from the Alley. The use of each these garage types are encouraged within a block to create a varied and more interesting Alley.
- c. Dwellings have direct or indirect access to their garages.
- d. Parking may be provided in Tandem stalls.
- e. Garages shall either be setback 4 ft. from Alley easement (no parking) OR Garages may be setback 16 ft. or more from Alley easement to allow surface parking in front of garage. Setbacks between 4 ft. and 16 ft. are not allowed due to potential parking encroachment in the Alley.
- f. Additional surface parking, with a minimum depth of 20ft., may be provided adjacent to garage. Parking shall be screened from the Primary and Secondary Streets by either placement behind a structure, by fencing per Section 13.A.1 and/or landscaped per Section 11.C.7.c.
- g. ~~Refer to Section 3 for additional District-specific parking standards.~~

12. ACCESSORY UNITS

- a. ~~Accessory Units are allowed for the Single-Family House Alley Access Building Type. See Section 8.P for Accessory Unit Building Type Standards.~~

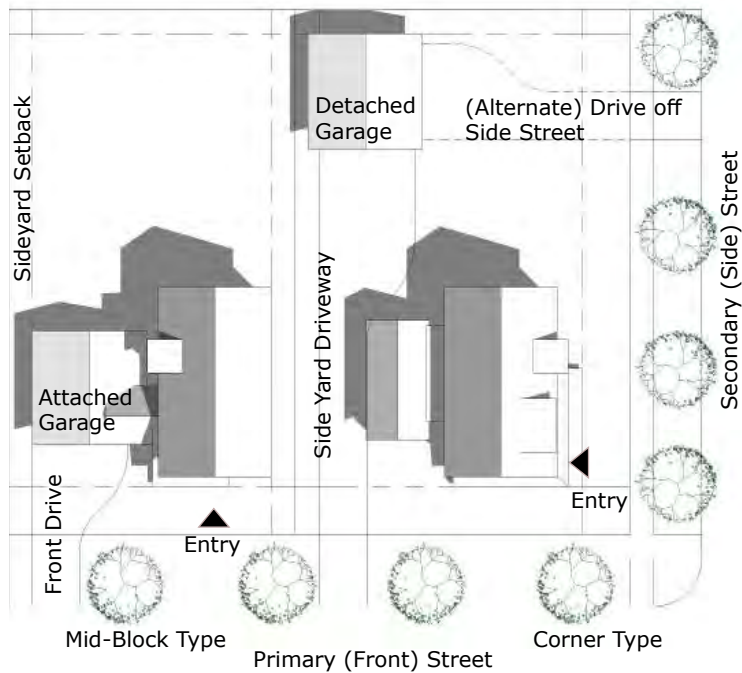

Illustrative Plan Diagram

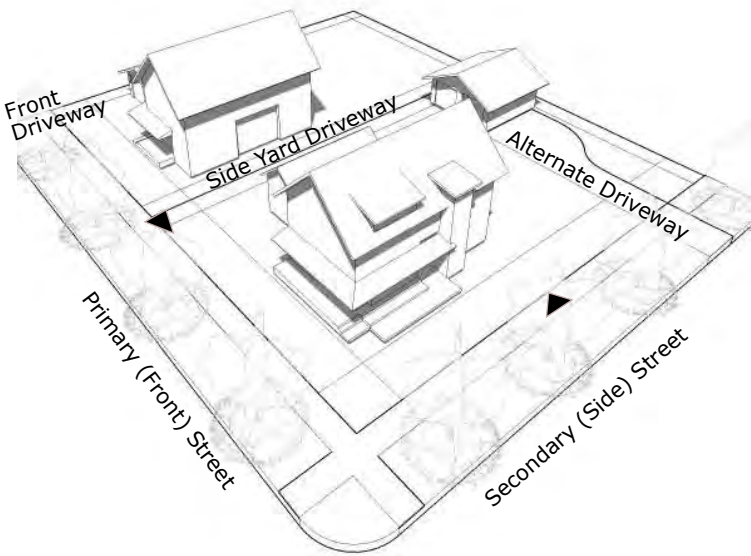

Illustrative Axonometric Diagram



Illustrative Photo: Side Yard Driveway Access



Illustrative Photo: Front Driveway Garage

1. TYPE DESCRIPTION

The Single-Family House - Street Access Building Type is a structure that accommodates one primary residence. Garages are accessed from the street by a side yard or front driveway. This type cannot be used if a rear Alley is provided. Home Occupations may also be allowed per District standards. A variety of lot sizes will allow for a diverse range of Single-Family homes in order to respond to the needs of different households, house sizes, and affordable levels.

2. APPLICABLE DISTRICTS

- a. Neighborhood General (BMS-NG) (3.D)
- b. Neighborhood Edge (BMS-NE) (3.E)

3. STREETScape

- a. Street Access Houses require a design and layout that lessens the visual impact of the garages from the street. The preferred solution is the side yard driveway.
- b. Streetscape diversity is achieved through different models and architectural styles. Each block face shall contain at least three different models. Different models are defined as those with significant variation in floor plan configuration and minor variation in size or number of bedrooms.
- c. Each of the three models must have at least two architectural styles and color schemes. To further differentiate models, vary wall colors and materials.
- d. Not more than two of the same model with the same architectural style can be used on a block face.
- e. Variety in building height is encouraged along a block face.

4. LOT SIZE

- a. Width: Min. 50 ft.
- b. Depth: Minimum 100 ft.
- c. See applicable District Standards in Section 3 for required setbacks and Build-to-Lines.

5. ACCESS

- a. The main entry to the building shall be accessed directly from and face the Primary (Front) Street. Corner buildings may have access on Secondary (Side) Street.
- b. Garages and services shall be accessed from the street in either a side yard driveway or front driveway condition. On corner lots the garage may be accessed from the Secondary (side) Street.
- c. Driveways shall be placed a minimum of 30 ft. apart unless combined into a shared driveway condition.
- d. Services, including utility access, above ground equipment and trash containers shall be located off of the street and screened from view.

6. BUILDING SIZE AND MASSING

- a. Maximum number of stories: 2.5
- b. Height may be increased to 3 stories in the BMS-NE District.
- c. Garages shall be no more than 60 percent of the structure facade.
 - (1) Detached or semi-detached garages shall be set to the rear of the lot with a side yard driveway. Corner lots may have driveway access from the Secondary (side) Street.
 - (2) Attached garages with a front driveway condition may have three bays when one of the bays is recessed a minimum of 2 ft. from the other garage bays and when a Porch Frontage Type is used with a porch at least 80 sq. ft. in size, (See Section 9.G).

- (3) Attached garages at corner lots may be accessed from the secondary side street, however the Primary (front) Street facing facade shall have articulation and windows, similar to the front facade.
- (4) If an attached garage is setback 16 ft. or more from the main facade of the house, or if the conditions of c(5) below are met, it shall be considered as a side yard driveway condition per 5.c. block face percentage calculation.
- (5) A garage may be part of a front facade when the garage has a side driveway condition. With a side driveway condition, the garage portion of the facade facing the street will feature design elements to match the residence. These elements may include similar window types, an upper story, and/or further architectural articulation complementary to the principal structure.
- d. Refer to Section 3 for additional District-specific building height standards.

7. FRONTAGES

- a. Allowed Frontage Types for Single-Family Houses are:
 - (1) Forecourt (9.E)
 - (1) Porch (9.G)
 - (2) Stoop (9.H)
- b. Refer to Section 9 for Frontage Type definitions and standards.
- c. Refer to Section 3 for applicable District standards for allowed encroachments into required setbacks.

8. LANDSCAPE STANDARDS

- a. The Common standards 11.C and the Single-Family Landscape standards set forth in Section 11.E.1 are applicable to Single-Family Houses.

9. SUSTAINABLE STANDARDS

- a. The Common standards in 12.C and Residential Sustainable standards set forth in Section 12.E are applicable to Single-Family Houses.

10. SITE IMPROVEMENT STANDARDS

- a. The Standards set forth in Section 13 are applicable to Single-Family Houses.


11. PARKING

- a. Residential Parking quantity requirements by District - See Section 3.
- b. Parking may be provided in attached, semi-detached, or detached garages accessed from the street.
- c. Dwellings have direct or indirect access to their garages.
- d. Parking may be provided in Tandem stalls.
- e. Refer to Section 3 for additional District-specific parking standards.

12. ACCESSORY UNITS

- a. Accessory Units are allowed for the Single-Family House - Street Access Building Type. See Section 8.P for Accessory Unit Building Type Standards.

BUILDING AND DEVELOPMENT STANDARDS FOR
8.P ACCESSORY UNIT

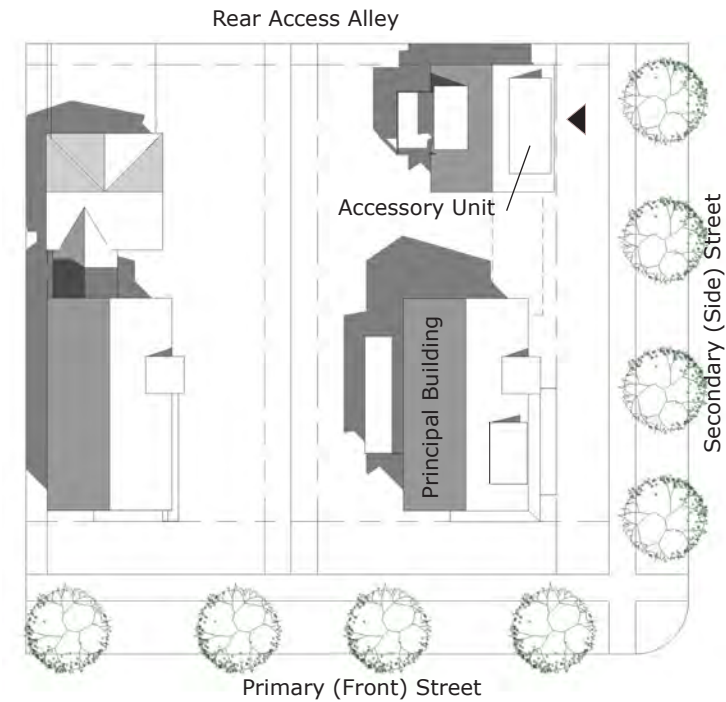

Illustrative Plan Diagram

1. TYPE DESCRIPTION


The Accessory Unit Building Type is a structure that accommodates accessory uses above a detached or semi-detached garage or within the principal building. The Accessory Unit is located on a lot which also contains the principal building. The Accessory Unit can be used as an accessory (rental) dwelling, home office, or simply additional living space. The units may contain permanent provisions for working, living, sleeping, eating cooking and sanitation. Dwelling units in the Accessory Unit Type are not included in the density counts for the community.

2. APPLICABLE DISTRICTS

- a.  Neighborhood General (BMS-NG) (3.D)
- b.  Neighborhood Edge (BMS-NE) (3.E)

3. STREETScape

- a. Corner lot Accessory Units are ideally suited for Home Occupation uses due to visibility from the street.
- b. Accessory Units enliven the Alley streetscape with activity and architectural interest, however their use is limited to avoid intense density in Alleys.

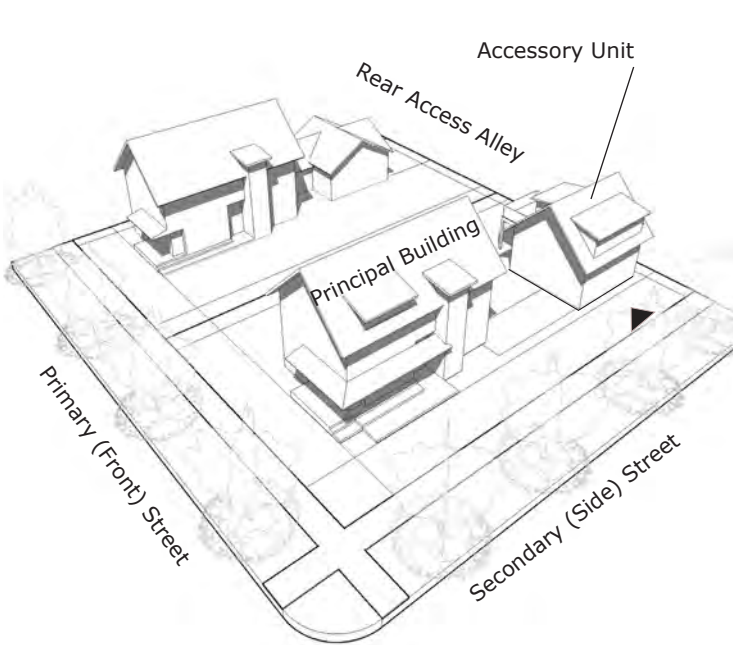

Illustrative Axonometric Diagram

4. LOT SIZE

- a. Width: Minimum per Principal Building Type
- b. Depth: Minimum per Principal Building Type
- c. See applicable District Standards in Section 3 for required setbacks and Build-to-Lines.

5. ACCESS

- a. The unit is located above a detached or semi-detached garage. Access to the upper level unit may be by an open or enclosed stair.
- b. The main entry to the unit must be separate from the garage below and direct to the exterior.
- c. The entry may be accessed from the Alley, side street, rear or sideyard of the main house.
- d. Where an Alley is present, parking and services shall be located off of the Alley.

6. BUILDING SIZE AND MASSING

- a. Maximum number of stories: 2, but in all cases not taller than the principal structure.
- b. The maximum size of an Accessory Unit above a detached or semi-detached garage is 600 SF.
- c. The maximum size of an Accessory Unit attached to the principal structure is 440 SF.
- d. The design and massing of the Accessory Unit shall be compatible with the principal building.
- e. Accessory Units are limited to 50% per block face.
- f. Refer to Section 3 for additional District-specific building height standards.



Illustrative Photo: Corner Lot / Alley Access Accessory Unit

7. FRONTAGES

- a. Frontage Types are not applicable for Accessory Units.
- b. Refer to Section 3 for applicable District Standards for allowed encroachments into required setbacks.

8. LANDSCAPE STANDARDS in Section

- a. ~~The Common standards 11.C and the Single-Family Landscape standards set forth in Section 11.E.1 are applicable to Accessory Units.~~ See /

9. SUSTAINABLE STANDARDS Section

- a. ~~The Common standards in 12. C and Residential Sustainable standards set forth in Section 12.E are applicable to Accessory Units.~~ See /

10. SITE IMPROVEMENT STANDARDS

- a. ~~The Standards set forth in Section 13 are applicable to Accessory Units.~~ See



Illustrative Photo: Street Access Accessory Unit

11. PARKING

- a. Residential Parking quantity requirements by District - See Section 3.
- b. Parking standards for the principal building apply.
- c. At Alley conditions one additional surface parking stall may be provided adjacent to garage for Accessory Unit or Home Occupation use. Parking shall be setback 20 ft. from Alley easement and shall be screened from the Primary and Secondary Streets by either placement behind a structure, by fencing per Section 13.A.1 and/or landscaped per Section 11.C.7.c.
- d. ~~Refer to Section 3 for additional District specific parking standards.~~



**FRONTAGE
TYPE
STANDARDS**

9


Section 9 identifies design standards for the Frontage Types permitted in each district.

9.A Introduction	9-2
9.B Storefront	9-2
9.C Arcade	9-2
9.D Gallery	9-2
9.E Forecourt	9-3
9.F Greenbelt	9-3
9.G Porch	9-3
9.H Stoop	9-3

9.E FORECOURT



Illustrative Photo: Residential Entry Court

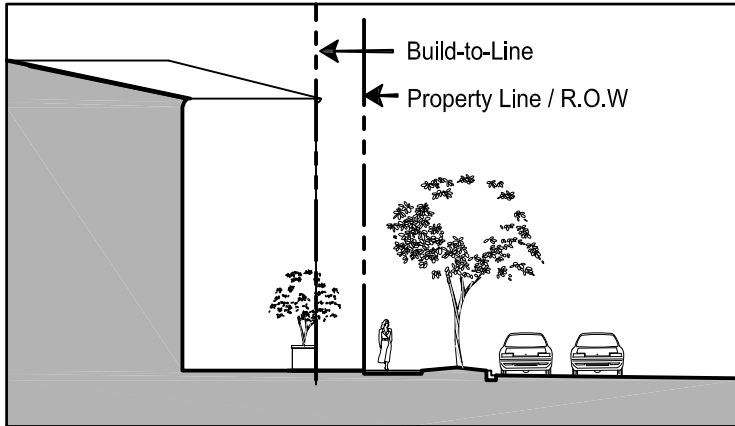

Standards Diagram Section - Forecourt

1. DESCRIPTION

The Forecourt Frontage Type is appropriate for either residential or commercial Districts and Building Types. This Frontage includes a small court space that is setback while the majority of the building is placed at or near the frontage line. The Forecourt may be used as an entry court and shared garden space for residential uses, or as additional shopping or restaurant seating areas within commercial districts. This type should be used sparingly along a block frontage.

2. APPLICABLE DISTRICTS

- a. Village Mixed-Use (BMS-VMU) (3.B)
- b. Neighborhood Collector (BMS-NC) ~~(3.C)~~ (3.C.A or B)
- c. Neighborhood General (BMS-NG) (3.D)
- d. Neighborhood Edge (BMS-NE) (3.E)

3. APPLICABLE BUILDING TYPES

- a. All Building Types (Section 8)


4. STANDARDS

- a. Placement: Court space shall front onto a street. The proportions and solar orientation should be carefully considered for user comfort.
- b. Windows and Doors: Entrances are at sidewalk grade.
- c. Elements: A small wall, hedge or fence shall be placed along the frontage line where it is not defined by a building; see Fencing Standards, section 13.A.
- d. Large trees placed in the Forecourt may overhang the sidewalks.

9.F GREENBELT



Illustrative Photo: Row Houses on Greenbelt

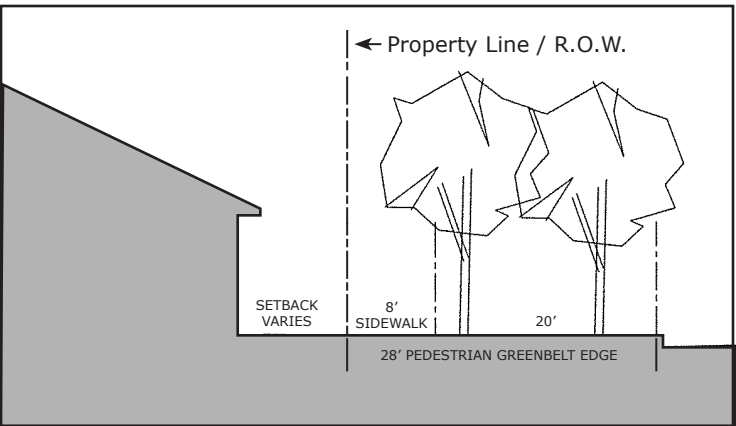

Standards Diagram Section - Greenbelt

1. DESCRIPTION

The Greenbelt Frontage Type is located per the Regulating Plan for Civic Spaces (5.B) primarily along Collector streets and serve as a "green connection" and trail network to amenities throughout the community. This Frontage Type serves as a buffer from the Collector Streets.

2. APPLICABLE DISTRICTS

- a. Neighborhood Collector (BMS-NC) ~~(3.C)~~ (3.C.A or B)
- b. Neighborhood General (BMS-NG) (3.D)

3. APPLICABLE BUILDING TYPES

- a. All Building Types allowed in District (Section 8)


4. STANDARDS

- a. Placement: The Greenbelt frontage creates a deep landscaped setback from the street. Buildings fronting on the greenbelt may have any of the allowable frontages for the Building Type (i.e. Porch, Stoop, etc.)
- b. Windows and Doors: Entrances may be at or above sidewalk grade.
- c. Elements: Frontage onto Greenbelt may be undefined or defined by fence or hedge.
- d. An 8 ft. min. wide sidewalk located along the property line will provide the public access for adjacent buildings.
- e. A Primary or Secondary Trail will meander through the Greenbelt, see ~~5.K~~ Illustrative Trail Layout Plan. When a Primary Trail is co-located within a Greenbelt, the Trail shall take on the development standards of the Greenbelt and no additional sidewalk is required.
- f. The Greenbelt shall be a minimum of 28 ft. deep along building Frontages.
- g. See Section ~~5.H~~ ^{update} for additional Greenbelt standards.

9.G PORCH



Illustrative Photo: Single-Family Front Porches

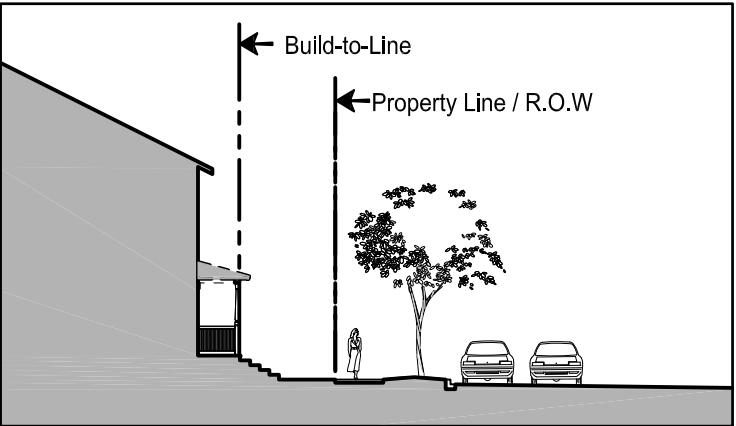

Standards Diagram Section - Porch

1. DESCRIPTION

The Porch Frontage Type is appropriate for all residential Districts and Building Types. This Frontage includes a covered roof area enclosing an outdoor room deep enough for seating. The Porch provides a transition between public and private space and creates opportunity for interaction between neighbors.

2. APPLICABLE DISTRICTS

- a. Village Mixed-Use - Residential only (BMS-VMU) (3.B)
- b. Neighborhood Collector (BMS-NC) ~~(3.C)~~ (3.C.B)
- c. Neighborhood General (BMS-NG) (3.D)
- d. Neighborhood Edge (BMS-NE) (3.E)

3. APPLICABLE BUILDING TYPES

- a. All Residential Building Types (8.F-8.O)


4. STANDARDS

- a. Placement: Building front shall be placed back far enough to allow for a Porch and stair, if required. Stair may encroach into required setback.
- b. Windows and Doors: Entrances may be at or above sidewalk grade.
- c. Elements: Porch shall be no less than 6 ft. deep to allow for usable seating area. However, the Porch may be reduced to a depth of 4 ft. to meet house and architectural style requirements. Upper floor decks are permitted above the Porch.

9.H STOOP



Illustrative Photo: Row House Stoop Frontages

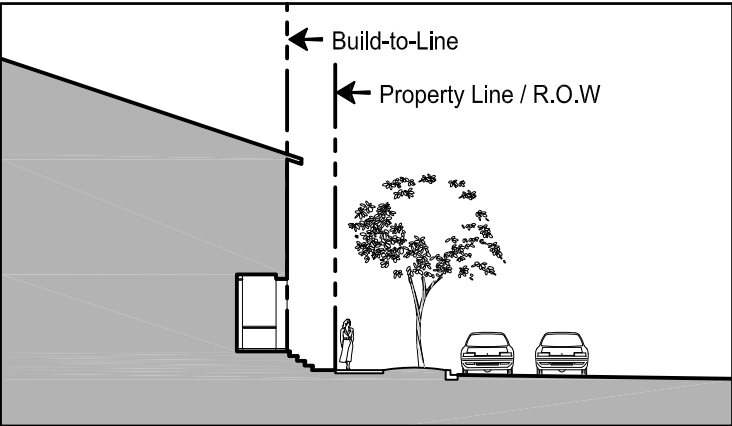

Standards Diagram Section - Stoop

1. DESCRIPTION

The Stoop Frontage Type is appropriate for Districts and Building Types that contain higher density housing where the ground floor residential use is close to the frontage line and raised from the street for privacy. This Frontage includes an exterior stair and landing and may be covered.

2. APPLICABLE DISTRICTS

- a. Village Mixed-Use - Residential only (BMS-VMU) (3.B)
- b. Neighborhood Collector (BMS-NC) ~~(3.C)~~ (3.C.B)
- c. Neighborhood General (BMS-NG) (3.D)
- d. Neighborhood Edge (BMS-NE) (3.E)

3. APPLICABLE BUILDING TYPES

- a. All Multi-Family Building Types (8.F-8.M)
- b. Single-Family Homes, if appropriate for style (8.N-8.O)

4. STANDARDS

- a. Placement: Building facade may be setback the depth of the entry stair from the sidewalk. Stair may encroach into required setback.
- b. Windows and Doors: Entrances are raised above sidewalk grade, where feasible.
- c. Elements: The Stoop may include a covered roof, awning, or door may be inset within the building front.

THIS PAGE INTENTIONALLY LEFT BLANK



RESERVED

10

THIS PAGE INTENTIONALLY LEFT BLANK



LANDSCAPE
STANDARDS

11

Section 11 describes the landscape guidelines and standards for the Badger Mountain South community.

11.A	Introduction.....	11-2
11.B	Guiding Principles.....	11-2
11.C	Common Standards Applicable to all Districts.....	11-3
11.D	Civic and Commercial District Standards.....	11-4
11.E	Residential Standards.....	11-4
11.F	Drought Tolerant and/or Native/Naturalized Plant List.....	11-5 11-11
11.G	Refined Plant List.....	11-7 11-12 11-15

11.A INTRODUCTION

The landscape guidelines and standards which follow are intended to complement the natural beauty of the Badger Mountain Preserve, help define the Badger Mountain South neighborhoods and commercial areas and provide a visually pleasant gateway into the City of Richland.

The landscape character of the Badger Mountain South community as identified in these standards borrows heavily from the precedent of the original shrub-steppe landscape found here. However that historical character is joined with other opportunities for a more refined and urban landscape pattern that relates to edges of uses and defines spaces into activity areas.

This section is divided into the following sub-sections: Guiding Principles, which suggest the overall orientation for all landscape applications; Common Standards, which apply to all Districts; District-specific landscape standards; and finally extensive plant lists of materials suitable in a variety of situations.

11.B GUIDING PRINCIPLES



1. WATER CONSERVATION


- a. Drought tolerant plants.
- b. Native/naturalized plants, suitable for site.
- c. Plants grouped into areas of similar water needs.

WATER CONSERVATION continued

- d. Design for low maintenance.
- e. Drip irrigation shall be primary irrigation system throughout community.
- f. Lawn to be drought tolerant.

2. REGIONAL LANDSCAPE CHARACTER

- a. Establishment of regional landscape character is encouraged.

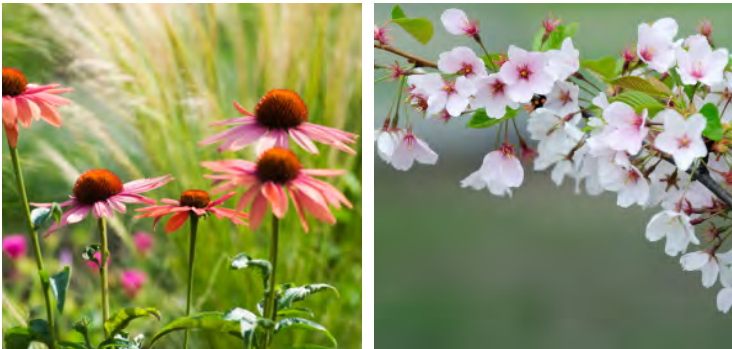

3. REFINED LANDSCAPE

- a. Design active use areas with soft native plant edge to frame in activity and blend in with native character.
- b. Provide drought tolerant, low grow lawn in active open space as needed for use.

4. TREES

- a. Encourage street tree organization in grouped spacing; vary pattern.
- b. Street trees in green belts arranged in varied pattern.
- c. Encourage use of trees to promote shade, air quality, and diverse ecosystems.

5. ENGAGE ALL SENSES

- a. Design with five senses in mind.
- b. Plants should be:
 - Colorful
 - Fragrant
 - Have varied texture
 - Layer plants of different structure for sound variation
 - Edible



Water Conserving Street Frontage Landscape

1. GENERAL STANDARDS

- a. At a miminum, all landscape design must conform with the requirements of RMC 23.54 Off-Street Parking and Landscape
- b. Landscape design should be both aesthetic and functional.
- c. Landscape design should enhance the building architecture and frame significant architectural elements.
- d. Landscape design may be informal, as applied to large use areas, or refined, as applied in commercial and residential districts.
- e. The use of trellises, arbors, planters, low walls and similar, are encouraged and when used should complement the building style.
- f. Mature tree height should be accounted for when locating trees near any utility and otherwise planted 10-feet from all utilities.
- g. Landscaping within a Clear Vision Triangle (at intersections) must not be higher than 18-inches when mature.
- h. Plant materials should be similar to the Drought Tolerant and/or Native/naturalized Plant List and Refined Plant List, Sections 11.F-11.G or other COR approved equivalent. Plants not selected from the lists must be native, naturalized, drought tolerant, and/or suitable in Tri-Cities Region USDA Hardiness Zone.
- i. Water conservation may be achieved by a combination of any of the following techniques:
 - (1) Group plants into areas of similar water need;
 - (2) Locate plants based on solar orientation, exposure and drainage patterns; and
 - (3) Amend soil based on existing conditions.

2. IRRIGATION

- a. Irrigate street frontage, alley, front, front/side yard transition, rear, side yard, and greenbelt landscape using a drip or sub-surface irrigation system, until plants are established. Spray irrigation system exceptions may be granted for Usable Lawn areas only.
- b. Use weather or moisture sensor with automatic control as needed.



Alley Landscape

3. STREET FRONTAGE / MEDIAN LANDSCAPE

- a. Street tree planting is required along all public streets and medians unless site constraints such as sight distance or utility conflicts prohibit installation. Builders must provide street trees aligned in clusters of varied spacing or equal spacing depending on the street character.
- b. When street trees are planted with equal spacing, spacing shall be 30 ft. o.c., typ. or as noted in Section 6: Street Standards per Edge Type 6.C-6.H.
- c. Street tree minimum size at installation as follows:
 - (1) Arterial Street - 1.5" caliper
 - (2) Collector Street - 1.5" caliper
 - (3) Local Street - 1.5" caliper
- e. Street trees must be centered in the landscape planter unless otherwise dictated by site constraints.
- f. Street frontage landscape planter shall consist of low maintenance, drought tolerant ornamental grasses, shrubs, or groundcover not to exceed 24" ht., or 18" ht. within 20 ft. of all intersections.
- g. See Section 6: Street Standards for width and location of street frontage landscape planter per Edge Type 6.C-6.H.

4. ALLEY LANDSCAPE

- a. A 4 ft. wide shoulder is provided on either side of the paved Alley per Section 6.G. The intent of this shoulder is to provide space for cars to pull over to pass in a two-way traffic condition.
- b. 4 ft. wide shoulder in Alley 6" depth crushed gravel suitable for driving surface.

5. HEDGE / WALL

- a. Hedges and walls may be used to create privacy and extend into the landscape as a complimenting feature to the building architecture.
- b. Hedges shall be composed of evergreen shrubs, not to exceed 4 ft. ht., See 11.G - Refined Plant list for Evergreen Hedge Plants.
- c. Walls shall consist of stone, masonry, or building materials that complement the principal structure, not to exceed 4 ft. ht.

6. DECORATIVE LANDSCAPE PLANTERS

- a. Will be free standing, and made of commercial grade materials and designed for heavy public use.
- b. The landscape planter design and style shall be a reflection of the neighborhood character to which they reside.
- c. Landscape planters shall include hardware or other deterrents for skateboards.

7. PARKING LOT LANDSCAPE

- a. Requirements
 - (1) Landscaping shall:
 - i. Be located to break up large expanses of pavement, both internally and at perimeters;
 - ii. Define and delineate driveways, parking stalls and pedestrian walkways;
 - iii. Screen parking lots from adjacent properties and street frontages;
 - iv. Be disbursed throughout the lot;
 - v. Be comprised primarily of deciduous trees for shading, with understory of shrubs and groundcover plants.
- b. Interior landscaping
 - (1) A minimum five percent (5%) of the total paved parking area (including parking stalls, driveways and walkways) shall be landscaped;
 - (2) Required perimeter and building foundation landscaping shall not be considered as part of the Interior Landscaping requirements. Exception: Where a required planter island abuts a required perimeter landscape area, the perimeter landscape may be widened but no additional planter landscape area is required.
 - (3) Interior Landscaping requirements will NOT apply to parking lots containing ten (10) or fewer parking stalls;
 - (4) All planter islands will be protected by a continuous, raised concrete curb;
 - (5) Planter islands shall be a minimum width of five (5) feet (inclusive of curbing) and the full depth of the adjacent parking stalls (minimum 75 square feet);
 - (6) Interior planter islands will contain a minimum of (1) deciduous shade tree and complemented with shrubs and groundcover not to exceed 3 feet in mature height;
 - (7) Every 12 parking stalls will be broken up with a planter island, if the row of parking contains a maximum of 14 stalls, no interior island is required;
 - (8) A planter island is required at the ends and corners of every row of parking stalls;
 - (9) Use of "turf" lawn is prohibited in interior landscape islands.
 - (10) Irregular- shaped planter islands shall contain the minimum 100 square feet of landscape area and protect the full depth of adjacent parking stalls.

- c. Perimeter Landscaping Abutting Adjacent Properties and Public Rights-of-Way
 - (1) Minimum landscape strip of 5-feet in width is required along all sides abutting adjoining properties.
 - (2) Minimum landscape strip of 10-feet in width is required along all sides abutting a public right-of-way.
 - (3) All perimeter landscape strips shall be planted with one type or a combination of tree types – small coniferous evergreen trees; small deciduous accent trees; and large deciduous shade trees.
 - (4) The "understory" planting will include one of the following three options and will form a solid screen and cover within two (2) years of planting:
 - i. A combination of shrubs and groundcover planted in a formal hedge planting and with a mature, minimum height of 18" and maximum height of 3-feet.

- ii. Segmental, solid screen wall - min. 30"/max.42" high (durable materials/no exposed wood), combined with wall-clinging plants and/or low shrub planting.
- iii. Earth mounded berm – min. 30"/max. 42" high, covered with an "informal" arrangement of low shrubs and groundcover (BMS-SD-DR District only).
- (6) All planter islands will be protected by a continuous, raised concrete curb;
- (7) Coordinate proposed tree and shrub locations and plant species with existing trees and shrubs on adjacent properties.
- (8) If proposed parking lot abuts an existing hedge, wall or screen planting that satisfies the requirements of this section, perimeter planting requirements MAY be relaxed. Provide adjacent plant location(s), plant types and sizes as part of the proposed landscape treatment.
- (9) Use of "turf" lawn is prohibited in perimeter landscape strips.
- d. Maintenance
 - (1) It will be the Owner's responsibility to maintain all landscape elements on their property.
 - (2) Landscaping will be kept in good condition, free of debris and refuse.
 - (3) Live plant material shall be kept alive in a healthy and thriving condition.
 - (4) Use of a temporary or permanent, drip or other approved water-conserving irrigation system, is required.
- e. Certificate of Occupancy
 - (1) The installed landscape will be inspected and no certificates of occupancy will be issued unless and until the landscaping meets all the requirements of the approved Landscape Plan and the LUDR - Section 11.
 - (2) If the landscaping cannot be installed safely and insure survival due to the time of year or other good cause, a temporary certificate of occupancy may be issued for a maximum period of 6 months. The owner shall furnish a satisfactory "bond" assurance for that 6-month period, guaranteeing installation of the approved landscaping.

8. NEIGHBORHOOD AND COMMUNITY STORAGE AREA SCREENING

- a. Neighborhood Storage Areas must be fenced per Section 13.A.3, Community Storage Facility per 13.A.4.
- b. Between the sidewalk and the fence, or the fence and the side or rear setbacks, an evergreen hedge shall be planted, per Section 11.G., and irrigation provided. The plantings shall be of sufficient size and quantity to reasonably be expected to provide 100% screening within three years of planting.
- c. Storage Facility screening only applies to BMS-NG and BMS-NC-P districts.

11.D CIVIC AND COMMERCIAL DISTRICT STANDARDS



Commercial Facility

1. APPLICABLE DISTRICTS

- a. Village Mixed-Use (BMS-VMU) (3.B)
- b. Neighborhood Collector - Commercial (BMS-NC) (3.C)
- c. Civic (BMS-CIVIC) (3.F)
- d. Special Districts:
 - (BMS-SD-SR) (4.B)
 - (BMS-SD-CMU) (4.C)
 - (BMS-SD-DR) (4.D)

2. SUBMITTAL PROCESS

- a. All development permit applications for civic, commercial, and multi-family buildings are required to submit a landscape plan. A "landscape" plan will include all areas of plazas, hardscape gathering places as well as planted areas; these areas will all count towards meeting the overall landscape requirements.
- b. Civic and commercial development proposals will include 10 percent Landscape Coverage of the site. The Master Developer of a commercial area may set aside common areas that meet this requirement rather than meeting it on a parcel by parcel basis.
- c. Multi-family structures that are over 50 units and use stacked units or courtyard building types are required to have designated children play areas of 5 square feet per unit, unless developed as Senior Housing. Play areas will meet Local Park standards and amenities, Section 5.D.


3. RIGHT OF WAY STANDARDS

- a. Street trees - Required, See Street Frontage Landscape, Section 11.C.3
- b. Sidewalk - Required, See Section 6: Street Standards

4. PARKING LOT LANDSCAPE STANDARDS

- a. See Common Parking Lot Landscape Standards, Section 11.C.7

11.E RESIDENTIAL STANDARDS

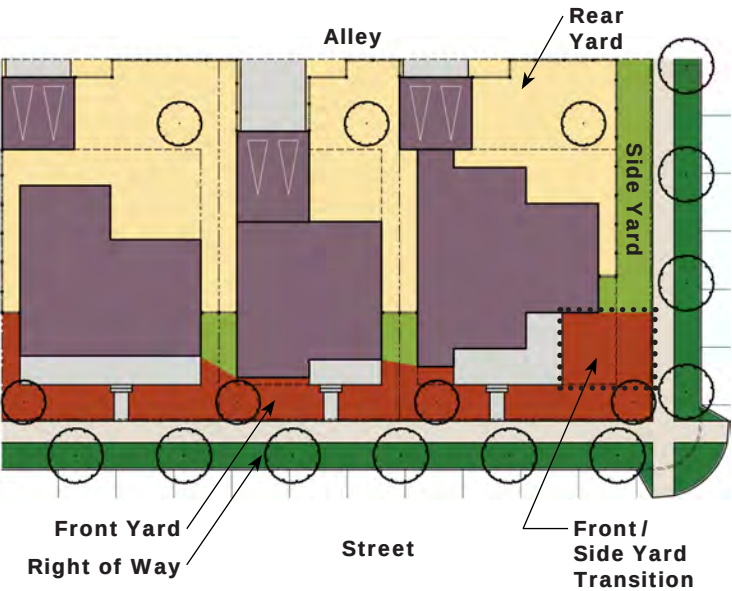

1. SINGLE FAMILY RESIDENTIAL

a. Applicable Districts

- (1) Neighborhood Collector - Commercial (BMS-NC) (3.C)
- (1) Neighborhood General (BMS-NG) (3.D)
- (2) Neighborhood Edge (BMS-NE) (3.E)

b. Right of Way

- (1) Street trees - See Street Frontage Landscape 11.C.3
- (2) Sidewalk - See Section 6: Street Standards

c. Front Yard

- (1) Front yard tree per lot - 1 required.
- (2) Use of perennials, ornamental grasses, shrubs, vines, groundcovers, and/or Usable Lawn.
- (3) Entry walk - 4 ft. wide minimum.

d. Front/Side Yard Transition


- (1) Front yard tree per lot - 1 encouraged.
- (2) Informal or formal landscape design: 100% Landscape Coverage.
- (3) Use of perennials, ornamental grasses, shrubs, vines, groundcovers, and/or Usable Lawn.

e. Side Yard

- (1) Side yard visible from the street: 60% Minimum Landscape Coverage.
- (2) Corner lot side yard: 100% Landscape Coverage.
- (3) Use of perennials, ornamental grasses, shrubs, vines, groundcovers and / or useable lawn.

f. Rear Yard

- (1) At a minimum, the rear yard shall be seeded or mulched for a stabilized surface.
- (2) Where rear yards abut a collector street, a 5 ft. landscape buffer shall be provided. For buffer planting requirements, see 11.C.7.c.

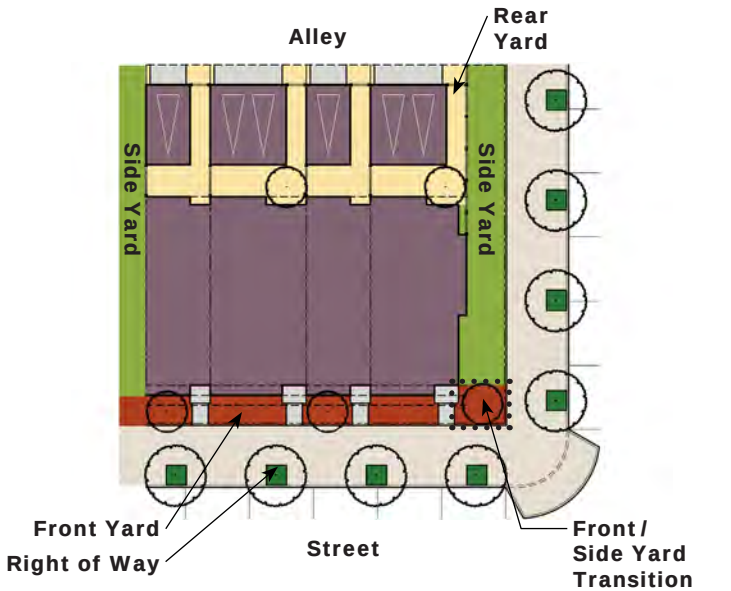

2. MULTI-FAMILY RESIDENTIAL

a. Applicable Districts

- (1) Village Mixed-Use (residential ground floor) (BMS-VMU) (3.B)
- (2) Neighborhood Collector (BMS-NC) (3.C)
- (3) Neighborhood General (BMS-NG) (3.D)

b. Right of Way

- (1) Street trees - See Street Frontage Landscape 11.C.3
- (2) Sidewalk - See Section 6: Street Standards

c. Front Yard

- (1) Front yard tree per lot - 1 required in areas without zero lot line condition. At zero lot line conditions, 1 tree per every 3 units is required.
- (2) Use of perennials, ornamental grasses, shrubs, vines, groundcovers, and/or Usable Lawn.
- (3) Entry walk - 5 ft. wide minimum.

d. Front/Side Yard Transition


- (1) Front yard tree per lot - 1 encouraged.
- (2) Informal or formal landscape design: 100% Landscape Coverage.
- (3) Use of perennials, ornamental grasses, shrubs, vines, groundcovers, and/or useable lawn.

e. Side Yard

- (1) Side yard visible from the street: 60% Minimum Landscape Coverage.
- (2) Corner lot side yard: 100% Landscape Coverage.
- (3) Use of perennials, ornamental grasses, shrubs, vines, groundcovers and / or useable lawn.

f. Rear Yard

- (1) At a minimum, the rear yard shall be seeded or mulched for a stabilized surface.
- (2) Where rear yards abut a collector street, a 5 ft. landscape buffer shall be provided. For buffer planting requirements, see 11.C.7.c.

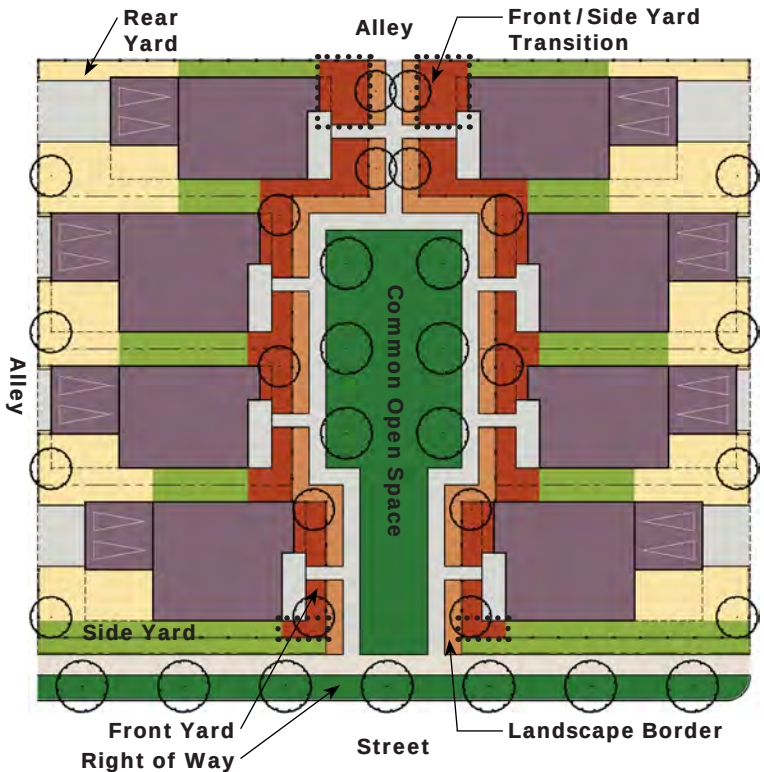

3. COURTYARD RESIDENTIAL

a. Applicable Districts

- (1) Neighborhood Collector (BMS-NC) (3.C)
- (2) Neighborhood General (BMS-NG) (3.D)

b. Right of Way

- (1) Street trees - See Street Frontage Landscape 11.C.3
- (2) Sidewalk - See Section 6: Street Standards

c. Front Yard

- (1) Front yard tree per lot - 1 required.
- (2) Use of perennials, ornamental grasses, shrubs, vines, groundcovers, and/or Usable Lawn.
- (3) Entry walk - 4 ft. wide minimum.

d. Front/Side Yard Transition

- (1) Landscape design: 100% Landscape Coverage.
- (2) Use of perennials, ornamental grasses, shrubs, vines, groundcovers, and/or Usable Lawn.

e. Side Yard

- (1) Side yard visible from common courtyard/green or street: 60% Minimum Landscape Coverage.
- (2) Corner lot side yard: 100% Landscape Coverage.
- (3) Use of perennials, ornamental grasses, shrubs, vines, groundcovers and / or useable lawn.

f. Rear Yard

- (1) At a minimum, the rear yard shall be seeded or mulched for a stabilized surface.
- (2) Where rear yards abut a collector street, a 5 ft. landscape buffer shall be provided. For buffer planting requirements, see 11.C.7.c.

g. Common Open Space

- (1) Canopy trees at 30 ft. o.c.
- (2) Ornamental trees @ 20 ft. o.c.
- (3) Use of perennials, ornamental grasses, shrubs, vines, groundcovers, and/or Usable Lawn.
- (4) Sidewalk width - 5 ft. wide minimum.

h. Landscape Border

- (1) Use of ornamental trees, perennials, ornamental grasses, shrubs, vines, and/or groundcovers.

11.F DROUGHT TOLERANT AND/OR NATIVE/NATURALIZED PLANT LIST

Drought Tolerant and/or Native/Naturalized Plant List provides a cohesive list of plant materials that are suited for the Tri-Cities region, and should be used as a guideline for landscape design. This list contains plants that are Drought Tolerant and/or Native or Naturalized. Each plant is designated as either N=Native or Naturalized, * = Drought Tolerant, or both. The large open space areas of Badger Mountain South will primarily consist of native plants or plant materials from this list.

11.G *Refined Plant List* suggests plant materials to be used in areas of specific use such as: parks, community gardens, residential landscapes, and similar circumstances. Other COR approved plants may also be used.

The (2) plant lists are intended to be used interchangeably, and should be used in harmony with one another for site specific landscape design intent.

NOTE:

- All plant materials are suitable for the Tri-Cities region based on USDA Hardiness Zone
- All plant materials on "USDA Plants Database, Washington State - Listed Noxious Weeds" list are PROHIBITED
- Edible plants are allowed, but not present on plant list. Edible plants shall be used where desired.

N = Native or Naturalized Plant Materials

* = Drought Tolerant Plant Materials

DECIDUOUS TREES


Botanical Name	Common Name	Ht. X Sp.	Min. Size	Sun / Shade	Special Features
<i>Acer campestre</i>	Hedge Maple	35' X 25'	1-1/2" Caliper	Sun	*
<i>Acer ginnala</i>	Amur Maple	15-20' X 15-20'	1-1/2" Caliper	Sun/Pt. Shade	*
<i>Acer glabrum</i>	Rocky Mountain Maple	20-30' X 20'	1-1/2" Caliper	Sun/Pt. Shade	* N
<i>Acer negundo</i> 'Sensation'	Sensation Box Elder	40' X 30'	1-1/2" Caliper	Sun/Pt. Shade	N
<i>Acer platanoides</i> 'Cleveland'	Cleveland Norway Maple	50' X 40'	1-1/2" Caliper	Sun/Pt. Shade	N
<i>Acer saccharum</i>	Sugar Maple	60' X 40'	1-1/2" Caliper	Sun/Pt. Shade	N
<i>Aesculus glabra</i>	Horsechestnut	25-35' X 15-25'	1-1/2" Caliper	Sun/Pt. Shade	*
<i>Alnus cordata</i>	Italian Alder	40' X 25'	1-1/2" Caliper	Sun	*
<i>Betula occidentalis</i>	Water Birch	12-15' X 12-15	1-1/2" Caliper	Sun	N
<i>Catalpa speciosa</i>	Western Catalpa	40-70' X 40-50'	1-1/2" Caliper	Sun	*
<i>Celtis occidentalis</i>	Common Hackberry	50-60' X 40-50'	1-1/2" Caliper	Sun/Pt. Shade	*
<i>Cercis occidentalis</i>	Western Redbud	10-15' X 10-15'	1-1/2" Caliper	Sun/Pt. Shade	*
<i>Cotinus coggygia</i>	Common Smoke Tree	10-15' X 10-15'	4-6' ht.	Sun	*
<i>Crataegus douglasii</i>	Black Hawthorn	10-20' X 20'	1-1/2" Caliper	Sun	* N
<i>Crataegus monogyna</i>	English Hawthorn	30' X 8'	1-1/2" Caliper	Sun	* N
<i>Fraxinus pennsylvanica</i>	Green Ash	50-60' X 30-40'	1-1/2" Caliper	Sun	*
<i>Ginkgo biloba</i>	Maiden Hair Tree	30-50' X 15-25'	1-1/2" Caliper	Sun	*
<i>Gleditsia t. var. inermis</i>	Thornless Honey Locust	35-70' X 25-35'	1-1/2" Caliper	Sun	*
<i>Gymnocladus dioica</i>	Kentucky Coffee Tree	50-60' X 30-40'	1-1/2" Caliper	Sun/Pt. Shade	*
<i>Koelreuteria paniculata</i>	Golden Raintree	20-30' X 25-35'	1-1/2" Caliper	Sun	*
<i>Morus alba</i>	White Mulberry	30-50' X 30-50'	1-1/2" Caliper	Sun/Pt. Shade	*
<i>Nyssa sylvatica</i>	Sour Gum	30-50' X 15-25'	1-1/2" Caliper	Sun	*
<i>Populus tremuloides</i>	Quaking Aspen	20-60' X 15-30'	1-1/2" Caliper	Sun	* N
<i>Prunus avium</i>	Sweet Cherry	15-30' X 15-30'	1-1/2" Caliper	Sun	N
<i>Prunus emarginata</i>	Bitter Cherry	15-30' X 15-30'	6-8' ht.	Sun	N
<i>Prunus padus</i>	European Bird Cherry	15-30' X 15-30'	1-1/2" Caliper	Sun	*
<i>Prunus tomentosa</i>	Nanking Cherry	15-30' X 15-30'	6-8' ht.	Sun	N
<i>Prunus virginiana</i>	Chokecherry	20-30' X 10-15'	6-8' ht.	Sun	* N
<i>Quercus bicolor</i>	Swamp White Oak	50-60' X 50-60'	1-1/2" Caliper	Sun	*



Meadow Sage



Oregon Grape

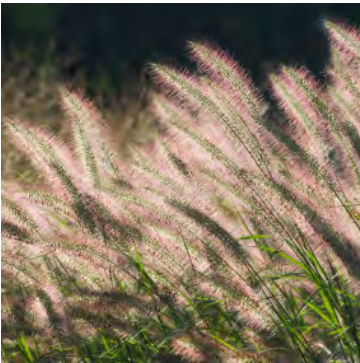

Fountain Grass



Moonshine Yarrow



Nootka Rose

SOURCES:

- Washington State University - Drought Tolerant Plants. By Tonie Fitzgerald, Revised January 2005. Washington State University, U.S. Department of Agriculture, and Spokane County.
- Benton County - Vascular Plant List. By R. Savers (1986), K. Beck (1994-1997), F. Caplow (1994-1997), and J. Downs (2003-2004).
- Native Plants of Eastern Washington: The Natural Way to Grow. By Washington Native Plant Society, Columbia Basin Chapter; <http://www.wnps.org/cbasin/index.html>
- Washington State University - Recommended Trees for the Mid-Coumbia Region. By Washington State University, September 2009.

11.F DROUGHT TOLERANT AND/OR NATIVE/NATURALIZED PLANT LIST continued

DECIDUOUS TREES continued

Botanical Name	Common Name	Ht. X Sp.	Min. Size	Sun/Shade	Special Features
<i>Quercus garryana</i>	Garry Oak	40-90' X 30-60'	1-1/2" Caliper	Sun	* N
<i>Quercus macrocarpa</i>	Burr Oak	60-75' X 30-40'	1-1/2" Caliper	Sun	*
<i>Robinia pseudoacacia</i>	Black Locust	40-75' X 30-60'	1-1/2" Caliper	Sun	N
<i>Salix babylonica</i>	Weeping Willow	30-40' X 35'	1-1/2" Caliper	Sun	N
<i>Salix scouleriana</i>	Scouler's Willow	30' X 30'	1-1/2" Caliper	Sun	N
<i>Sophora japonica</i>	Japanese Pagoda Tree	50-70' X 50-70'	1-1/2" Caliper	Sun/Pt. Shade	*
<i>Sorbus aucuparia</i>	European Mountain Ash	20-40' X 15-25'	1-1/2" Caliper	Sun/Pt. Shade	*
<i>Tillia tomentosa</i>	Silver Linden	40-50' X 20-30'	1-1/2" Caliper	Sun	*
<i>Ulmus pumila</i>	Siberian Elm	50' X 40'	1-1/2" Caliper	Sun	*

EVERGREEN TREES

Botanical Name	Common Name	Ht. X Sp.	Min. Size	Sun/Shade	Special Features
<i>Juniperus occidentalis</i>	Western Juniper	50-60' X 30-50'	6-8' ht.	Sun	N
<i>Juniperus scopulorum</i>	Rocky Mountain Junier	10-30' X 8-15'	6-8' ht.	Sun	* N
<i>Picea abies</i>	Norway Spruce	60' X 25'	6-8' ht.	Sun/Pt. Shade	*
<i>Picea pungens</i>	Colorado Blue Spruce	50-75' X 25'	6-8' ht.	Sun/Pt. Shade	*
<i>Pinus aristata</i>	Bisltecone Pine	20-30' X 10-15'	6-8' ht.	Sun	*
<i>Pinus flexilis</i>	Limber Pine	30-55' X 15-25'	6-8' ht.	Sun	*
<i>Pinus nigra</i>	Austrian Pine	40-60' X 20-30'	6-8' ht.	Sun	*
<i>Pinus ponderosa</i>	Ponderosa Pine	80-100' X 25-30'	6-8' ht.	Sun/Pt. Shade	* N
<i>Pinus strobus</i>	White Pine	50-80' X 20-40'	6-8' ht.	Sun	*
<i>Thuja occidentalis</i>	American Arborvitae	20-30' X 10-15'	6-8' ht.	Sun/Pt. Shade	N
<i>Tsuga canadensis</i>	Canadian Hemlock	40-70' X 25-35'	6-8' ht.	Sun/Pt. Shade	N

SHRUBS, BUNCHGRASSES, GROUNDCOVERS AND PERENNIALS - SEE APPENDIX

SHRUBS

Botanical Name	Common Name	Ht. X Sp.	Min. Size	Sun/Shade	Special Features
<i>Amelanchier alnifolia</i>	Serviceberry	10-12' X 20'	30-36" ht./sp.	Sun/Pt. Shade	* N
<i>Aronia arbutifolia</i>	Red Chokeberry	6-8'	30-36" ht./sp.	Sun/Pt. Shade	*
<i>Artemisia tridentata</i>	Big Sagebrush	4-15' X 3-10'	30-36" ht.	Sun	* N
<i>Artemisia tripartita</i>	Three-Tip Sage	Varies	30-36" ht.	Sun	N
<i>Atriplex canescens</i>	Four-wing Saltbush	3-6' X 4-8'	18-24" ht.	Sun	* N
<i>Berberis hematocarpa</i>	Red Barberry	3-6'	18-24" ht.	Sun/Pt. Shade	*
<i>Berberis t. 'Crimson Pygmy'</i>	Crimson Pygmy Japanese Barberry	1' X 3'	12-18" ht.	Sun	*
<i>Berberis thunbergii</i>	Japanese Barberry	4-6' X 4-6'	18-24" ht.	Sun	*
<i>Caragana arborescens</i>	Siberian Pea Shrub	15' X 20'	30-36" ht./sp.	Sun	*
<i>Caragana frutex</i>	Russian Pea Shrub	10' X 8'	30-36" ht./sp.	Sun	*
<i>Caryopteris x clandonensis</i>	Blue Mist	2' X 2'	12-18" ht.	Sun	*
<i>Ceratoides lanata</i>	Winter Fat	1-3' X 1-3'	12-18" ht.	Sun	*
<i>Cercocarpus ledifolius</i>	Curl-Leaf Moutain Mahogany	5-12' X 5-12'	30-36" ht.	Sun	*
<i>Chamaebatiera millifolium</i>	Fernbush	6-8' X 6-8'	24-30" ht.	Sun	*
<i>Chrysothamnus viscidiflorus</i>	Green Rabbitbrush	6' X 3'	18-24" ht.	Sun	* N
<i>Chrysothamnus nauseaus</i>	Rabbitbrush	6' X 3'	18-24" ht.	Sun	*

SHRUBS continued

Botanical Name	Common Name	Ht. X Sp.	Min. Size	Sun/Shade	Special Features
<i>Cornus stolonifera</i>	Redtwig Dogwood	7-9' X 12'	24-30" ht./sp.	Sun or Shade	N
<i>Corylus cornuta californica</i>	Western Hazelnut	5-12' X 5-12'	30-36" ht./sp.	Sun/Pt. Shade	N
<i>Cotinus coggyria</i>	Smoke Tree	12-15' X 12-15'	30-36" ht./sp.	Sun	*
<i>Cotoneaster acutifolius</i>	Peking Cotoneaster	6-10' X 6-10'	30-36" ht./sp.	Sun	*
<i>Cotoneaster adpressus</i>	Cotoneaster	1' X 6'	12-18" sp.	Sun/Pt. Shade	*
<i>Cotoneaster apiculatus</i>	Cranberry Cotoneaster	3' X 6'	18-24" ht./sp.	Sun	*
<i>Cotoneaster divaricatus</i>	Spreading Cotoneaster	6' X 6'	24-30" ht./sp.	Sun	*
<i>Cotoneaster horizontalis</i>	Rock Cotoneaster	2-3' X 15'	12-18" sp.	Sun/Pt. Shade	*
<i>Ephedra viridis</i>	Mormon Tea	3-4' X 3-4'	12-18" ht./sp.	Sun	*
<i>Eriogonum niveum</i>	Snow Buckwheat	1-2' X 1-2'	12-18" sp.	Sun	N
<i>Eriogonum sphaerocephalum</i>	Rock Buckwheat	1-2' X 1-2'	12-18" sp.	Sun	N
<i>Falugia paradoxa</i>	Apache Plume	4-6' X 5'	24-30" ht./sp.	Sun	*
<i>Forestiera neomexicana</i>	New Mexican Privet	12-18' X 12'	30-36" ht./sp.	Sun/Pt. Shade	*
<i>Genista tinctoria</i>	Woadwaxen	6' X 6'	30-36" ht./sp.	Sun	*
<i>Hippophae rhamnoides</i>	Sea Buckthorn	8-10' X 8-10'	30-36" ht./sp.	Sun	*
<i>Holodiscus discolor</i>	Ocean Spray	3' X 4'	24-30" ht./sp.	Part Shade	*
<i>Juniperus horizontalis</i>	Creeping Juniper	1' X 8-10'	12-18" sp.	Sun/Pt. Shade	*
<i>Kolkwitzia amabilis</i>	Beauty Bush	10-12' X 10-12'	30-36" ht./sp.	Sun/Pt. Shade	*
<i>Lavendula sp.</i>	Lavender	2-4'	12-18" ht./sp.	Sun	*
<i>Ligustrum vulgare</i>	Common Privet	15' X 12'	30-36" ht./sp.	Sun/Pt. Shade	*
<i>Lindera benzoin</i>	Spicebush	6-12' X 6-12'	30-36" ht./sp.	Sun	*
<i>Lonicera maachii</i>	Amur Honeysuckle	10-15'	30-36" ht./sp.	Sun/Pt. Shade	*
<i>Mahonia repens</i>	Creeping Mahonia	1' X 3'	12-18" sp.	Sun/Pt. Shade	*
<i>Microbiota decussata</i>	Siberian Carpet Cypress	1' X 7-8'	12-18" sp.	Sun or Shade	*
<i>Myrica pensylvanica</i>	Bayberry	9' X 5-12'	30-36" ht./sp.	Sun/Pt. Shade	*
<i>Philadelphus lewisii</i>	Mock Orange	5-10' X 5-12'	30-36" ht./sp.	Lt. Shade	N
<i>Philadelphus microphyllus</i>	Littleleaf Mock Orange	4-5' X 4-5'	24-30" ht.	Sun/Pt. Shade	* N
<i>Physocarpus opulifolius</i>	Common Ninebark	9' X 10'	30-36" ht.	Sun/Pt. Shade	*
<i>Pinus mugo mugo</i>	Mugo Pine	2-6' X 12'	18-24" ht./sp.	Sun/Pt. Shade	*
<i>Potentilla fruticosa</i>	Cinquefoil	1-4' X 2-4'	12-18" ht./sp.	Sun/Pt. Shade	*
<i>Prunus besseyi</i>	Hanson's Bush Cherry	4-6' X 4-6'	24-30" ht.	Sun	*
<i>Rhamnus frangula</i>	Alder Buckthorn	10-12' X 10-12'	30-36" ht./sp.	Sun	*
<i>Rhus aromatica 'Gro-Low'</i>	Gro-Low Sumac	2-3' X 6-8'	12-18" sp.	Sun/Pt. Shade	*
<i>Rhus glabra</i>	Smooth Sumac	10-20'	30-36" ht./sp.	Sun	* N
<i>Rhus typhina</i>	Staghorn Sumac	15' X 15'	30-36" ht./sp.	Sun/Pt. Shade	*
<i>Ribes aureum</i>	Golden Currant	3-6' X 3-6'	24-30" ht.	Part Shade	* N
<i>Rosa nutkana</i>	Nootka Rose	6' X 4'	24-30" ht.	Sun/Pt. Shade	*
<i>Rosa rubrifolia</i>	Redleaf Rose	6' X 5'	24-30" ht.	Sun/Pt. Shade	*
<i>Rosa rugosa</i>	Rugosa Rose	3-6' X 3-6'	24-30" ht.	Sun	*
<i>Rubus deliciosus</i>	Thimbleberry	3-5' X 6'	24-30" ht./sp.	Sun/Pt. Shade	*
<i>Salvia dorrii</i>	Desert Sage	1-3' X 2-4'	12-18" ht.	Sun	N
<i>Sambucus cerulea</i>	Blue Elderberry	10-15' X 10'	30-36" ht./sp.	Sun/Pt. Shade	N
<i>Sambucus nigra</i>	Black Elder	Varies	24-30" ht.	Sun/Pt. Shade	N
<i>Spiraea x vanhouttei</i>	Vanhoutte Spirea	6' X 8'	30-36" ht./sp.	Sun/Pt. Shade	*
<i>Symphoricarpos albus</i>	Common Snowberry	2-6' X 2-6'	12-18" ht.	Sun/Pt. Shade	N
<i>Symphoricarpos x chenaultii</i>	Chenault Coralberry	2-6' X 2-6'	12-18" ht.	Sun/Pt. Shade	*

11.F DROUGHT TOLERANT AND/OR NATIVE/NATURALIZED PLANT LIST continued

SHRUBS continued

Botanical Name	Common Name	Ht. X Sp.	Min. Size	Sun / Shade	Special Features
<i>Syringa vulgaris</i>	Common Lilac	8-20' X 6-15'	30-36" ht./sp.	Sun	*
<i>Taxus cuspidata</i>	Japanese Yew	10-25' X 5-12'	24-30" ht.	Sun/Pt. Shade	*
<i>Viburnum lantana</i>	Wayfaring Tree	10-20' X 10-20'	30-36" ht.	Sun/Pt. Shade	*
<i>Viburnum trilobum</i>	Cranberry Bush	10' X 8	30-36" ht.	Sun/Pt. Shade	*
<i>Yucca sp.</i>	Yucca	1-7' X 1-4'	18-24" ht.	Sun	*

BUNCHGRASSES

NOTE: Min. size 4" pots, typ. Upon approval from Master Landscape Architect, plugs or seed may be used.

Botanical Name	Common Name	Ht. X Sp.	Min. Size	Sun / Shade	Special Features
<i>Achnatherum hymenoides</i>	Indian Ricegrass	12-24"	4" pots	Sun	N
<i>Elymus elymoides</i>	Squirreltail	12-24"	4" pots	Sun	N
<i>Festuca idahoensis</i>	Idaho Fescue	12-24"	4" pots	Sun/Pt. Shade	N
<i>Hesperostipa comata</i>	Needle & Thread Grass	24-36"	4" pots	Sun	N
<i>Leymus cinereus</i>	Basin Wildrye	4-6'	4" pots	Sun	N
<i>Poa secunda</i>	Sandberg's Bluegrass	8-12"	4" pots	Sun	N
<i>Pseudoroegneria spicata</i>	Bluebunch Wheatgrass	12-36"	4" pots	Sun	N
<i>Sporobolus cryptandrus</i>	Sand Dropseed	12-24"	4" pots	Sun	N

GROUNDCOVERS

Botanical Name	Common Name	Ht. X Sp.	Min. Size	Sun / Shade	Special Features
<i>Aegopodium variegatum</i>	Bishop's Weed	6" X 12'	4" pots	Sun/Pt. Shade	*
<i>Archostaphylos uva-ursi</i>	Kinnikinnick	3-6' X 2-3'	4" pots	Sun/Pt. Shade	* N
<i>Campsis radicans</i>	Trumpet Creeper	6" X 40'	4" pots	Sun/Pt. Shade	*
<i>Cerastium tomentosum</i>	Snow-In-Summer	6-8" X 15'	4" pots	Lt. Shade	*
<i>Delosperma cooperi</i>	Purple Hardy Ice Plant	3" X 24"	4" pots	Lt. Shade	*
<i>Delosperma nubigenum</i>	Yellow Hardy Ice Plant	1" X 36"	4" pots	Lt. Shade	*
<i>Galium odoratum</i>	Sweet Woodruff	3" X 12'	4" pots	Shade	*
<i>Helianthemum nummularium</i>	Sunrose	6-8" X 36"	4" pots	Sun	*
<i>Mahonia repens</i>	Creeping Mahonia	12" X 36"	4" pots	Sun/Pt. Shade	*
<i>Marrubium rotundifolia</i>	Silver Edged Horehound	10" X 18"	4" pots	Sun	*
<i>Ruschia pulvinaris</i>	Creeping Shrubby Ice Plant	3" X 14"	4" pots	Sun	*
<i>Sedum spurium</i>	Two-Row Stonecrop	3-6" X 12-24"	4" pots	Sun	*
<i>Thymus serpyllum</i>	Creeping Thyme	3" X 36"	4" pots	Lt. Shade	*
<i>Thymus serpyllum</i> 'Reiter'	Reiter Creeping Thyme	3" X 36"	4" pots	Lt. Shade	*
<i>Thymus pseudolanuginosus</i>	Woolly Thyme	2-3" X 36"	4" pots	Lt. Shade	*
<i>Veronica oltensis</i>	Thyme-Leaf Speedwell	1" X 24"	4" pots	Sun	*
<i>Veronica pectinata</i>	Blue Woolly Speedwell	ground hugging	4" pots	Sun/Pt. Shade	*
<i>Vinca major</i>	Periwinkle	8" X 36"	4" pots	Sun/Pt. Shade	*

PERENNIALS

NOTE: Min. size 4" pots, typ. Upon approval from the BMS-MPA, plugs or seed may be used.

Botanical Name	Common Name	Ht. X Sp.	Min. Size	Sun/Shade	Special Features
<i>Achillea ageratifolia</i>	Greek Yarrow	4-10"	4" pots	Sun	*
<i>Achillea f. 'Moonshine'</i>	Moonshine Yarrow	24"	4" pots	Sun	*
<i>Achillea millefolium</i>	Common Yarrow	36"	4" pots	Sun	* N
<i>Adenophora liliifolia</i>	Lady Bells	18" X 12"	4" pots	Sun/Pt. Shade	*
<i>Agastache sp.</i>	Hyssop	18-30" X 18"	4" pots	Sun/Pt. Shade	*
<i>Agastache canna</i>	Wild Hyssop	24-36" X 18"	4" pots	Sun/Pt. Shade	*
<i>Alchemilla molis</i>	Lady's Mantle	12-18" X 12-15"	4" pots	Sun/Pt. Shade	*
<i>Allium sphaerocephalum</i>	Round-Headed Garlic	24" X 36"	4" pots	Sun/Pt. Shade	N
<i>Anaphalis margaritacea</i>	Pearly Everlasting	20" X 20"	4" pots	Sun	*
<i>Antennaria dioica 'Rosea'</i>	Pink Pussies	4-12" X 8-12"	4" pots	Sun	*
<i>Anthemis tinctoria</i>	Golden Marguerite	24-36" X 24-36"	4" pots	Sun	*
<i>Arabis caucasica</i>	Wall Rockcress	6" X 18"	4" pots	Sun	*
<i>Artemisia abrotanum</i>	Southernwood	36" X 36"	4" pots	Sun	*
<i>Artemisia 'Powis Castle'</i>	Silver Sage	36" X 36"	4" pots	Sun	*
<i>Artemisia rigida</i>	Stiff Sage	Varies	4" pots	Sun	N
<i>Artemisia stellerana</i>	Dusty Miller	30" X 36"	4" pots	Sun	*
<i>Asclepias tuberosa</i>	Butterfly Weed	36" X 12"	4" pots	Sun	*
<i>Aster tataricus</i>	Tatarian Aster	2-7' X 3'	4" pots	Sun/Pt. Shade	*
<i>Atriplex confertifolia</i>	Shadscale	1-3' X 1-3'	4" pots	Sun	N
<i>Aurinia saxatilis</i>	Basket-Of-Gold	12-18" X 12-15"	4" pots	Sun/Pt. Shade	*
<i>Balsamorhiza careyana</i>	Carey's Balsamroot	Varies	4" pots	Sun	N
<i>Balsamorhiza sagittata</i>	Arrowleaf Balsamroot	Varies	4" pots	Sun	N
<i>Baptisia australis</i>	Blue False Indigo	3-6' X 4'	4" pots	Sun	*
<i>Bergenia cordifolia</i>	Heartleaf Bergenia	18" X 12"	4" pots	Shade	*
<i>Berlandiera lyrata</i>	Chocolate Flower	18-36" X 18-36"	4" pots	Sun	*
<i>Brunnera macrophylla</i>	Brunnera	18" X 24"	4" pots	Sun/Pt. Shade	*
<i>Calamintha grandiflora</i>	Calamint	24" X 24"	4" pots	Sun/Pt. Shade	*
<i>Callirhoe involucrata</i>	Poppy Mallow	6" X 24-36"	4" pots	Sun/Pt. Shade	*
<i>Calylophus hartwegii</i>	Sundrops	12" X 24"	4" pots	Sun/Pt. Shade	*
<i>Calylophus serrulatus</i>	Dwarf Snowdrops	18" X 18"	4" pots	Sun/Pt. Shade	*
<i>Campanula rotundifolia</i>	Bellflower	12-24"	4" pots	Sun/Pt. Shade	*
<i>Catananche caerulea</i>	Cupid's Dart	12" X 12"	4" pots	Sun	*
<i>Centranthus ruber</i>	Red Valerian	36" X 36"	4" pots	Sun/Pt. Shade	*
<i>Coreopsis grandiflora</i>	Sunray	12-24" X 36"	4" pots	Sun	*
<i>Coreopsis verticillata 'Moonbeam'</i>	Moonbeam Coreopsis	18-24"	4" pots	Sun	*
<i>Coronilla varia</i>	Crown Vetch	18-24" X 48"	4" pots	Sun	*
<i>Dianthus barbatus</i>	Sweet William	20" X 12"	4" pots	Lt. Shade	*
<i>Dianthus plumarius</i>	Cottage Pink	10-18" X 20"	4" pots	Lt. Shade	*
<i>Echinacea purpurea`</i>	Purple Coneflower	24-48"	4" pots	Sun	*
<i>Epimedium alpinum</i>	Alpine Epimedium	6-9"	4" pots	Sun/Pt. Shade	*
<i>Erigeron speciosus</i>	Fleabane	24" X 24"	4" pots	Sun/Pt. Shade	*
<i>Eriogonum umbellatum</i>	Sulfur Flower	6-12" X 12-24"	4" pots	Sun	*
<i>Eryngium bourgatii</i>	Sea Holly	24"	4" pots	Sun	*

11.F DROUGHT TOLERANT AND/OR NATIVE/NATURALIZED PLANT LIST continued

PERENNIALS continued

NOTE: Min. size 4" pots, typ. Upon approval from the BMS-MPA, plugs or seed may be used.

Botanical Name	Common Name	Ht. X Sp.	Min. Size	Sun/Shade	Special Features
<i>Erysimum cheiri</i>	English Wallflower	12-30" X 12-18"	4" pots	Sun/Pt. Shade	*
<i>Euphorbia polychroma</i>	Cushion Spurge	18" X 24"	4" pots	Sun/Pt. Shade	*
<i>Filipendula vulgaris</i>	Dropwort	24-36"	4" pots	Sun	*
<i>Gaillardia aristata</i>	Blanket Flower	24-30" X 24"	4" pots	Sun	*
<i>Gaillardia x grandiflora</i> 'Goblin'	Goblin Blanket Flower	12" X 18"	4" pots	Sun	*
<i>Geranium sanguineum</i>	Bloody Cranesbill	8-18" X 24-30"	4" pots	Sun/Pt. Shade	*
<i>Grayia spinosa</i>	Hopsage	Varies	4" pots	Sun	N
<i>Helianthus maximiliani</i>	Sunflower	10' X 3'	4" pots	Sun	*
<i>Hemerocallis sp.</i>	Day Lily	Varies	4" pots	Sun	*
<i>Hesperaloe parviflora</i>	Red Yucca	3-4' X 3-4'	4" pots	Sun/Pt. Shade	*
<i>Heuchera sanguinea</i>	Coral Bells	12-18" X 12-15"	4" pots	Sun/Pt. Shade	*
<i>Hyssopus officinalis</i>	Hyssop	18-24" X 36"	4" pots	Sun/Pt. Shade	*
<i>Kniphofia uvaria</i>	Red-Hot Poker	2-4'	4" pots	Sun	*
<i>Lamium maculatum</i>	Dead Nettle	8" X 36"	4" pots	Shade	*
<i>Lewisia rediviva</i>	Bitterroot	2" X 4"	4" pots	Sun/Pt. Shade	*
<i>Liatris spicata</i>	Gayfeather	4' X 2'	4" pots	Sun	*
<i>Limonium platyphyllum</i>	Statice	30" X 36"	4" pots	Sun	*
<i>Linum perenne</i>	Perennial Blue Flax	1" X 18"	4" pots	Sun	*
<i>Liriope spicata</i>	Creeping Lily Turf	8-10" X 18"	4" pots	Shade	*
<i>Lobularia maritima</i>	Sweet Alyssum	Varies	4" pots	Sun/Pt. Shade	*
<i>Lupinus leucophyllus</i>	Velvet Lupine	Varies	4" pots	Sun/Pt. Shade	N
<i>Lychnis chalcedonica</i>	Maltese Cross	24-36" X 12"	4" pots	Sun/Pt. Shade	*
<i>Monarda fistulosa</i>	Bee Balm	24-48" X 12"	4" pots	Lt. Shade	*
<i>Narcissus sp.</i>	Daffodil	12-18" X 12"	4" pots	Sun/Pt. Shade	*
<i>Nepeta x faassenii</i>	Catmint	12" X 18"	4" pots	Sun/Pt. Shade	*
<i>Oenothera macrocarpa</i>	Ozark Sundrops	6" X 24"	4" pots	Sun/Pt. Shade	*
<i>Opuntia polycantha</i>	Starvation Pricklypear	Varies	4" pots	Sun	N
<i>Papaver orientale</i>	Oriental Poppy	12-24" X 12-24"	4" pots	Sun	*
<i>Penstemon sp.</i>	Beard Tongue	Varies	4" pots	Sun/Pt. Shade	*
<i>Penstemon strictus</i>	Rocky Mountain Penstemon	24-36" X 24"	4" pots	Sun/Pt. Shade	*
<i>Perovoskia atriplicifolia</i>	Russian Sage	3-5' X 3-4'	4" pots	Sun	*
<i>Phlox subulata</i>	Moss Pink	6" X 18"	4" pots	Sun/Pt. Shade	*
<i>Pulsatilla vulgaris</i>	Pasque Flower	9-12" x 6-10"	4" pots	Sun/Pt. Shade	*
<i>Ratibida columnifera</i>	Mexican Hat	30" X 12"	4" pots	Sun	*
<i>Rudbeckia hirta</i>	Black-Eyed Susan	3-4' X 2'	4" pots	Sun	*
<i>Salvia nemerosa</i>	Meadow Sage	18-36" X 24-36"	4" pots	Sun	*
<i>Salvia officinalis</i>	Garden Sage	18-24" X 12-18"	4" pots	Sun	*
<i>Santolina chamaecyparissus</i>	Lavender Cotton	24" X 36"	4" pots	Sun	*
<i>Sanvitalia procumbens</i>	Creeping Zinnia	4-6" X 18"	4" pots	Sun	*
<i>Saponaria ocymides</i>	Soapwort	12" X 36"	4" pots	Sun	*
<i>Scutellaria resinosa</i>	Skullcap	6-8" X 12"	4" pots	Sun/Pt. Shade	*
<i>Sedum</i> 'Ruby Glow'	Ruby Glow Stonecrop	8" X 15"	4" pots	Sun	*
<i>Sedum spectabile</i>	Showy Stonecrop	18-24" X 10-15"	4" pots	Sun/Pt. Shade	*

PERENNIALS continued

NOTE: Min. size 4" pots, typ. Upon approval from the BMS-MPA, plugs or seed may be used.

Botanical Name	Common Name	Ht. X Sp.	Min. Size	Sun / Shade	Special Features
<i>Sempervivum</i> sp.	Hen & Chicks	2-4" X 6-12"	4" pots	Lt. Shade	*
<i>Sphaeralcea incana</i>	Orange Mallow	24-48" X 24"	4" pots	Sun	*
<i>Stachys byzantina</i>	Lamb's Ear	18" X 36"	4" pots	Sun/Pt. Shade	*
<i>Tanacetum vulgare</i>	Tansy	36" X 24"	4" pots	Sun	*
<i>Teucrium x lucidrys</i>	Germander	12" X 24"	4" pots	Sun	*
<i>Thymus vulgaris</i>	Common Thyme	12" X 24"	4" pots	Lt. Shade	*
<i>Thymus vulgaris</i> 'Orange Balsam'	Orange Balsam Thyme	6-8" X 15"	4" pots	Lt. Shade	*
<i>Veronica</i> sp.	Speedwell	Varies	4" pots	Sun	*


11.G REFINED PLANT LIST

NOTE:

- All plant materials are suitable for the Tri-Cities region based on USDA Hardiness Zone
- All plant materials on "USDA Plants Database, Washington State - Listed Noxious Weeds" list are PROHIBITED
- Edible plants are allowed, but not present on plant list. Edible plants shall be used where desired.

N = Native or Naturalized Plant Materials

* = Drought Tolerant Plant Materials

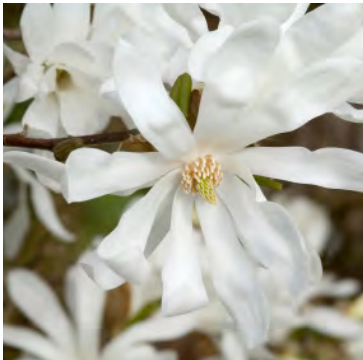

Star Magnolia



Bird's Nest Spruce



Winged Euonymus



Maiden Hair Grass



Sedum

DECIDUOUS TREES

Botanical Name	Common Name	Ht. X Sp.	Min. Size	Sun / Shade	Special Features
<i>Acer circinatum</i>	Vine Maple	15' X 15'	6-8' ht., multi-stem	Sun/Pt. Shade	N new leaves tinted red, great in native garden
<i>Acer griseum</i>	Paper Bark Maple	5-20' X 5-20'	4-6' ht., multi-stem	Sun/Pt. Shade	beautiful reddish bark peels away in thin sheets
<i>Acer palmatum</i>	Japanese Maple	5-20' X 5-20'	4-6' ht., multi-stem	Sun/Pt. Shade	leaves deep cut toothed lobes, colors from reds, oranges, greens, variegated
<i>Acer rubrum</i>	Red Maple	30-60' X 15-30'	1-1/2" Caliper	Sun	amazing bright red fall color, fast growing
<i>Amelanchier grandiflora</i>	Serviceberry	20' X 15'	1-1/2" Caliper	Sun	fragrant white flowers in spring, blue edible berries following, orange fall color
<i>Betula jacquemontii</i>	Jacquemonti Birch	40-60' X 30'	1-1/2" Caliper	Sun	narrow habit, striking white bark
<i>Betula nigra</i> 'Summer Cascade'	Summer Cascade Birch	40-60' X 30'	1-1/2" Caliper	Sun	narrow habit, creamy brown exfoliating bark, gold fall color
<i>Carpinus betulus</i> 'Frans Fontaine'	Columnar European Hornbeam	35' X 15'	1-1/2" Caliper	Sun	narrow dense habit, furrowed gray bark, yellow or dark red fall color
<i>Catalpa speciosa</i>	Catalpa	15-25' X 15-25'	1-1/2" Caliper	Sun/Lt. Shade	round habit, upright trumpet shaped white flowers in late spring and summer
<i>Cercidiphyllum japonicum</i>	Katsura	20-40' X 20-30'	1-1/2" Caliper	Sun/Lt. Shade	foliage changes color from red-purple to blue-green in summer, then yellow in fall
<i>Cercis canadensis</i>	Eastern Redbud	15-25' X 15-25'	1-1/2" Caliper	Sun/Lt. Shade	profuse vibrant sweet pea shaped pink flower clusters in early spring
<i>Cornus florida</i>	Flowering Dogwood	15-30' X 15-30'	1-1/2" Caliper	Sun	flower clusters amongst white to pink-red bracts in spring, before leaves emerge
<i>Cornus kousa</i>	Kousa Dogwood	15-25' X 15-25'	6-8' ht., multi-stem	Sun/Lt. Shade	top of branches covered with white to pink-red flowers in late spring, leaves below
<i>Crataegus laevigata</i>	English Hawthorn	18-25' X 15-20'	1-1/2" Caliper	Sun	dainty white flower clusters after leaf out in spring, showy red fruit summer & fall
<i>Fraxinus angustifolia</i> 'Raywood'	Raywood Ash	25-35' X 25'	1-1/2" Caliper	Sun	compact, delicate lacy small leaves, round headed, compact, fast growing
<i>Gleditsia triacanthos</i>	Honey Locust	30-50' X 25-35'	1-1/2" Caliper	Sun	many bright green oval leaflets compose long fern like leaves, yellow fall color
<i>Liriodendron tulipifera</i>	Tulip Tree	50-60' X 40'	1-1/2" Caliper	Sun	unique saddle shaped leaves, beautiful yellow tulip shaped flowers in spring
<i>Liquidambar styraciflua</i> 'Clydesform'	American Sweetgum	30' X 15'	1-1/2" Caliper	Sun	furrowed bark, profuse hanging seed pods; purple, yellow, or red fall color
<i>Magnolia x soulangeana</i>	Saucer Magnolia	15-25' X 15-25'	6-8' ht., multi-stem	Sun	large fragrant tulip shaped white to pink-red purple flowers in late winter
<i>Magnolia stellata</i>	Star Magnolia	10' X 20'	4-6' ht., multi-stem	Sun	profuse white star like flowers in late winter to early spring, slow growing
<i>Malus sp.</i>	Flowering Crabapple	10-25' X 10-25'	1-1/2" Caliper	Sun	showy white to pink-red flowers in spring, followed by small showy edible red fruit
<i>Oxydendrum arboreum</i>	Sourwood	15-30' X 20'	1-1/2" Caliper	Sun	all year interest, pyramidal habit, leaves vary in season, fragrant bell white flowers
<i>Prunus cerasifera</i> 'Newport'	Flowering Plum	15-30' X 15-20'	1-1/2" Caliper	Sun	fragrant, single white to light pink flowers, dark purple foliage in summer
<i>Prunus serrulata</i> 'Kwanzan'	Flowering Cherry	10-25' X 10-25'	1-1/2" Caliper	Sun	narrow inverted cone shaped habit, large double pink flower clusters
<i>Prunus x yedoensis</i>	Yoshino Flowering Cherry	25-40' X 25-30'	1-1/2" Caliper	Sun	single white to light pink flowers in early spring, fast growing
<i>Pyrus calleryana</i> 'Chanticleer'	Flowering Pear	30-40' X 15-20"	1-1/2" Caliper	Sun	narrow pyramidal habit, showy white flowers in early spring, orange fall color
<i>Stewartia sp.</i>	Stewartia	25-40' X 25-30'	1-1/2" Caliper	Sun/Pt. Shade	single white camelia like flowers in summer, smooth flaking bark in winter
<i>Styrax japonicus</i>	Japanese Snowdrop Tree	15-25' X 10-15'	6-8' ht., multi-stem	Sun/Pt. Shade	fragrant hanging clusters of white flowers, leaves curl upward, in spring
<i>Tilia cordata</i> 'Corzam'	Corinthian Linden	45' X 15'	1-1/2" Caliper	Sun	dense pyramid habit, leaves yellow in fall, fragrant clusters of yellow flowers in summer
<i>Zelkova serrata</i>	Sawleaf Zelkova	50-60' X 50-60'	1-1/2" Caliper	Sun	narrow oval sawtoothed green leaves, yellow to dark red fall color

EVERGREEN TREES

Botanical Name	Common Name	Ht. X Sp.	Min. Size	Sun / Shade	Special Features
<i>Calocedrus deccurrens</i>	Incense Cedar	50-70' X 10-15'	6-8' ht.	Sun	* dense narrow pyramidal habit, reddish brown bark, small duckbill shaped cones
<i>Chamaecyparis obtusa</i> 'Gracilis'	Hinoki False Cypress	20' X 4-10'	4-6' ht.	Sun/Pt. Shade	slender upright habit, yellow foliage, dwarf varieties allowed
<i>Cupressocyparis x leylandii</i>	Leylandi Cypress	15-30' X 8-15'	4-6' ht.	Sun	slender upright pyramidal habit, gray-green foliage, smal scaley cones
<i>Picea abies</i>	Norway Spruce	60' X 25'	6-8' ht.	Sun/Pt. Shade	* pyramidal habit, deep green foliage, hardy & wind resistant
<i>Picea pungens</i>	Colorado Blue Spruce	50-75' X 25'	6-8' ht.	Sun/Pt. Shade	* broad pyramidal habit, dark green to blue green foliage
<i>Pinus nigra</i>	Austrian Pine	40-60' X 20-30'	6-8' ht.	Sun	* stout uniform pyramidal habit, 3-6.5" long dark green in 2 needle bundles
<i>Pinus strobus</i>	White Pine	40-60' X 20-30'	6-8' ht.	Sun	symmetrical pyramidal habit, 3-5.5" long blue green in 5 needle bundles
<i>Pinus sylvestris</i> 'Fastigiata'	Scotch Pine	40-60' X 20-30'	6-8' ht.	Sun	dense narrow column habit, 1.5-3" long blue green in 2 needle bundles
<i>Thuja occidentalis</i>	American Arborvitae	20-30' X 10-15'	6-8' ht.	Sun/Pt. Shade	N dense narrow cone habit, dark green color throughout winter
<i>Tsuga canadensis</i>	Canadian Hemlock	40-70' X 25-35'	6-8' ht.	Sun/Pt. Shade	N dense pyramidal habit, branchlets droop, dark green needles

SHRUBS, GROWDCOVERS, ORNAMENTAL GRASSES, VINES, ROCK GARDEN PLANTS, AND EVERGREEN HEDGE PLANTS - SEE APPENDIX

SHRUBS

Botanical Name	Common Name	Ht. X Sp.	Min. Size	Sun / Shade	Special Features
<i>Aronia melanocarpa</i> 'Autumn Magic'	Black Chokeberry	3-5' X 3-5'	24-30" ht.	Sun/Pt. Shade	deciduous, spreading habit, serrated leave, edible black fruit, white/pink flower clusters
<i>Berberis thunbergii</i>	Japanese Barberry	4-6' X 4-6'	24-30" ht.	Sun	* deciduous, slender arching spiny branches, color varies based on variety
<i>Berberis t.</i> 'Crimson Pygmy'	Crimson Pygmy Japanese Barberry	1' X 3'	12-18" sp.	Sun	* deciduous, dwarf, deep red color in full sun
<i>Calluna vulgaris</i>	Scotch Heather	1-2' X 2'	12-18" sp.	Sun	evergreen, tiny scalelike green leaves, spikes covered in bell shaped flowers
<i>Chaenomeles sp.</i>	Flowering Quince	2-6' X 2-4'	24-30" ht./sp.	Sun	deciduous, habit varies, vibrant single to double flowers in late winter
<i>Chamaecyparis lawsoniana</i> 'Ellwoodii'	Dwarf False Orford Cedar	6-8' X 2'	30-36" ht.	Sun	evergreen, dense compact habit, blue green foliage
<i>Cornus stolonifera</i>	Redtwig Dogwood	7-9' X 12'	30-36" ht.	Sun or Shade	N deciduous, open spreading habit, brilliant red fall foliage & winter twigs
<i>Cotinus coggyria</i>	Smoke Tree	12-15' X 12-15'	30-36" ht.	Sun	* deciduous, broad urn habit, round green to purple leaves, flower airy plumes
<i>Cotoneaster acutifolius</i>	Peking Cotoneaster	6-10' X 6-10'	30-36" ht.	Sun	* deciduous, fountain shaped habit, glossy green foliage, black fruit
<i>Cotoneaster parneyi</i>	Parneyi Cotoneaster	6' X 6'	30-36" ht./sp.	Sun/Pt. Shade	* evergreen, arching habit, dark green foliage, white flower clusters, red fruit
<i>Cotoneaster mircophyllus</i>	Rockspray Cotoneaster	2-3' X 15'	12-18" sp.	Sun/Pt. Shade	* evergreen, horizontal habit, tiny dark green leaves, white flowers, red fruit
<i>Daphne x burkwoodii</i>	Burkwood Daphne	3-4' X 3-4'	24-30" ht./sp.	Sun/Lt. Shade	evergreen, erect compact habit, abundant fragrant white to pink flower clusters
<i>Deutzia gracilis</i>	Slender Deutzia	2-4' X 3-4'	18-24" ht./sp.	Sun/Lt. Shade	deciduous, graceful arching habit, green toothed leaves, clusters of white flowers
<i>Erica sp.</i>	Heath	1-2' X 2'	12-18" sp.	Sun/Pt. Shade	evergreen, round habit, small needlelike leaves, abundant small bell flowers
<i>Euonymus alatus</i> 'Compacta'	Winged Euonymus	4-6' X 4-6'	24-30" ht.	Sun	deciduous, round habit, green wing shaped leaves, vibrant red-orange fall color
<i>Euonymus fortunei</i>	Winter Creeper	2-5' X 3-6'	24-30" ht./sp.	Sun/Pt. Shade	evergreen, habit varies, green to purple to yellow to variegated foliage color
<i>Forsythia hybrids</i>	Forsythia	5-9' X 4-8'	24-30" ht.	Sun	deciduous, fountain shaped habit, green foliage, bright yellow flowers along stems
<i>Hydrangea macrophylla</i>	Garden Hydrangea	4-8' X 4-8'	24-30" ht.	Pt. Shade	deciduous, round habit, green toothed foliage, huge flower clusters, color varies
<i>Hydrangea paniculata</i>	Panicle Hydrangea	5-10' X 5-10'	30-36" ht.	Pt. Shade	deciduous, upright spreading habit, oval green leaves, elongated flower clusters
<i>Ilex crenata</i> 'Convexa'	Compact Japanese Holly	4-6' X 4-6'	24-30" ht.	Sun/Pt. Shade	evergreen, dense round to erect habit, small green leaves, black berries
<i>Juniperus scopulorum</i> 'Skyrocket'	Skyrocket Juniper	10-15' X 2-3'	30-36" ht.	Sun/Pt. Shade	* evergreen, narrow columnar habit, blue-gray foliage
<i>Lavendula sp.</i>	Lavender	2' X 2'	12-18" ht.	Sun	* evergreen, round habit, small aromatic gray-green foliage, fragrant flowers
<i>Lonicera pileata</i>	Privet Honeysuckle	2-3' X 8'	18-24" sp.	Sun/Pt. Shade	* evergreen, spreading habit, green foliage, small fragrant white flowers, berries
<i>Paeonia sp.</i>	Peony	2-4' X 2-4'	12-18" ht./sp.	Sun/Pt. Shade	deciduous, arching habit, green divided leaves, amazing single or double flowers
<i>Perovskia atriplicifolia</i> 'Blue Spire'	Russian Sage	2-4' X 2-4'	12-18" ht./sp.	Sun	* evergreen, upright habit, gray-green foliage, tall showy purple flower stems
<i>Philadelphus lewisii</i>	Mock Orange	4-10' X 4-10'	30-36" ht.	Sun/Pt. Shade	deciduous, fountain shaped habit, abundant fragrant white flowers
<i>Picea abies</i> 'Nidiformis'	Bird's Nest Spruce	3-5' X 4-6'	18-24" ht.	Sun	evergreen, low dense habit, gray-blue foliage, needles in star shapes whorl
<i>Pieris japonica</i>	Lily-of-the-Valley Shrub	2-6' X 2-6'	24-30" ht.	Sun/Pt. Shade	evergreen, upright habit, bronze new foliage to green, drooping flower clusters
<i>Pinus mugo mugo</i> 'Pumilio'	Dwarf Mugo Pine	4-8' X 4-8'	18-24" ht./sp.	Sun/Pt. Shade	* evergreen, round compact habit, dark green foliage
<i>Rosa nutkana</i>	Nootka Rose	6' X 4'	24-30" ht.	Sun/Pt. Shade	* deciduous, arching habit, deep pink flowers in spring, showy rose hips follow
<i>Rosa rugosa</i>	Rugosa Rose	3-6' X 3-6'	24-30" ht.	Sun	* deciduous, open habit, single to double flowers in spring-fall, huge large rose hips

SHRUBS continued

Botanical Name	Common Name	Ht. X Sp.	Min. Size	Sun / Shade	Special Features
<i>Salvia argentea</i>	Silver Sage	1-2' X 2'	12-18" ht.	Sun	deciduous, upright habit, gray-green foliage, hooded white flowers on stems
<i>Sedum 'Autumn Joy'</i>	Autumn Joy Stonecrop	1-2' X 2'	12-18" ht.	Sun/Pt. Shade	* succulent, upright habit, green foliage, clusters of pink flowers in late summer
<i>Spiraea japonica</i>	Spiraea	2-5' X 2-5'	18-24" ht.	Sun	deciduous, upright habit, toothed foliage, 8" clusters of pink flowers summer-fall
<i>Syringa vulgaris</i>	Common Lilac	8-20' X 6-15'	30-36" ht.	Sun	* deciduous, open upright habit, profuse fragrant conical shaped flower clusters
<i>Viburnum plicatum tomentosum</i>	Doublefile Viburnum	4-6' X 4-6'	24-30" ht.	Sun	deciduous, tiered habit, dull dark green foliage, white snowball flower clusters
<i>Yucca filamentosa</i>	Adam's Needle Yucca	1-7' X 1-4'	12-18" ht./sp.	Sun	* evergreen, stiff round habit, dark green foliage, 3-5' tall white flower clusters

GROUNDCOVERS

Botanical Name	Common Name	Ht. X Sp.	Min. Size	Sun / Shade	Special Features
<i>Aegopodium variegatum</i>	Bishop's Weed	6"	1 gal.	Sun/Pt. Shade	* perennial, light green edged white 3 leaflet leaves, fast growing
<i>Archostaphylos uva-ursi</i>	Kinnikinnick	3-6' X 2-3'	1 gal.	Sun/Pt. Shade	* N evergreen, small glossy dark green leaves, white or pink flowers, red fruit
<i>Cerastium tomentosum</i>	Snow-In-Summer	6-8"	1 gal.	Lt. Shade	* perennial, silver gray leaves, small white flowers in summer, fast growing
<i>Galium odoratum</i>	Sweet Woodruff	3"	1 gal.	Shade	* perennial, aromatic green whorl leaves, tiny white flower clusters summer
<i>Helianthemum nummularium</i>	Sunrose	6-8" X 36"	1 gal.	Sun	* evergreen, gray-green leaves, single or double vibrant or light color flowers
<i>Juniperus horizontalis</i>	Creeping Juniper	1' X 8-10'	18-24" sp.	Sun/Pt. Shade	* evergreen, feathery gray-green foliage, fast growing
<i>Mahonia repens</i>	Creeping Mahonia	12" X 36"	1 gal.	Sun/Pt. Shade	* evergreen, spiny edged leaves to divided blue-green leaflets, flower clusters
<i>Sedum spurium</i>	Two-Row Stonecrop	3-6" X 12-24"	1 gal.	Sun	* succulent, dark green or bronze leaves, clusters of pink flowers in summer
<i>Thymus serpyllum</i>	Creeping Thyme	3" X 36"	1 gal.	Lt. Shade	* perennial, round dark green leaves, purple flowers in summer
<i>Thymus pseudolanuginosus</i>	Woolly Thyme	2-3" X 36"	1 gal.	Lt. Shade	* perennial, walkable mat habit, woolly gray leaves, pink flowers in midsummer
<i>Veronica pectinata</i>	Blue Woolly Speedwell	ground hugging	1 gal.	Sun/Pt. Shade	* perennial, small deeply cut gray leaves, profuse deep blue flowers in spring
<i>Vinca minor</i>	Dwarf Periwinkle	4" X 36"	1 gal.	Sun/Pt. Shade	* evergreen, trailing dark green leaves, lavender-blue 5 petal flowers in spring

ORNAMENTAL GRASSES

Botanical Name	Common Name	Ht. X Sp.	Min. Size	Sun / Shade	Special Features
<i>Bouteloua curtipendula</i>	Sideoats Grama Grass	1-2' X 2'	1 gal.	Sun	* narrow gray-green leaf clumps, one-sided flowering stems in summer
<i>Bouteloua gracilis</i>	Blue Grama Grass	1-2' X 1'	1 gal.	Sun	* inflorescence of flowers at right angles, red in summer, bleached to white
<i>Calamagrostis x acutiflora</i>	Feather Reed Grass	2-6' X 2-3'	1 gal.	Sun/Pt. Shade	* evergreen, erect clump of narrow green leaves, upright flower stems
<i>Carex morrowii expallida</i>	Variegated Japanese Sedge	1-2' X 2'	1 gal.	Sun/Pt. Shade	mounding habit, green and white striped drooping leaves
<i>Deschampsia cespitosa</i>	Tufted Hair Grass	1-2' X 2'	1 gal.	Sun/Pt. Shade	narrow dark green leaf clumps, airy inflorescences in late spring to early summer
<i>Festuca glauca</i>	Blue Fescue	1' X 1'	1 gal.	Sun	dense extremely fine blue-silver leaves, flower spikes in summer
<i>Heloctotrichon sempervirens</i>	Blue Oat Grass	2-3' X 2-3'	1 gal.	Sun	* narrow fountain like blue-gray leaf clumps, wispy straw colored flower clusters
<i>Imperata cylindrica</i>	Japanese Blood Grass	1-2' X 1'	1 gal.	Sun/Pt. Shade	upright medium leaf clumps, green at base, red at tip & intensifies in summer-fall
<i>Miscanthus sinensis</i>	Maiden Hair Grass	2-3' X 2-3'	1 gal.	Sun/Pt. Shade	* mounding green leaf clumps, colorful flower plumes in summer-fall
<i>Pennisetum alopecuroides</i>	Fountain Grass	2-3' X 2-3'	1 gal.	Sun/Pt. Shade	* bright green leaf clumps, pinkish to oat colored rabbit tail-like flower plumes
<i>Pennisetum setaceum</i>	Fountain Grass	2-4' X 2-3'	1 gal.	Sun/Pt. Shade	* green leaf clumps, copper-pink to purplish tall flower plumes
<i>Pennisetum setaceum 'Rubrum'</i>	Red Fountain Grass	2-4' X 2-3'	1 gal.	Sun/Pt. Shade	* reddish bronze leaf clumps, copper-pink to purplish tall flower plumes
<i>Stipa tenuifolia</i>	Silky Thread Grass	2' X 1'	1 gal.	Sun	* green leaf clumps, large feather-like straw colored inflorescences
<i>Stipa tenuissima</i>	Mexican Feather Grass	1-2' X 1-2'	1 gal.	Sun/Pt. Shade	* bronze to green leaf clumps, airy feather-like straw colored inflorescences

VINES

Botanical Name	Common Name	Ht. X Sp.	Min. Size	Sun / Shade	Special Features
<i>Akebia quinata</i>	Fiveleaf Akebia	15-30'	1 gal.	Sun or Shade	deciduous, deep green leaflets, wine purple clusters of vanilla scented flowers
<i>Campsis radicans</i>	Trumpet Vine	30'	1 gal.	Sun/Pt. Shade	* deciduous, green multiple leaflets, 3" long orange tubular flowers with red lobes
<i>Clematis armandii</i>	Evergreen Clematis	20-35'	1 gal.	Sun	* evergreen, divided glossy green leaves, fragrant white flower clusters
<i>Clematis ligusticifolia</i>	Clematis	20'	1 gal.	Sun	* deciduous, green lobed leaves, multiple flower colors & sizes
<i>Hydrangea anomala petiolaris</i>	Climbing Hydrangea	20-30'	1 gal.	Sun/Pt. Shade	* deciduous, green heart shaped leaves, large white lace-cap flowers
<i>Lonicera japonica</i>	Japanese Honeysuckle	20-30'	1 gal.	Sun/Pt. Shade	* semievergreen, oval deep green leaves, fragrant two-lobed pink-white flowers
<i>Lonicera sempervirens</i>	Trumpet Honeysuckle	10-20'	1 gal.	Sun/Pt. Shade	semievergreen, whorls of orange-yellow to red trumpet shaped flowers in spring
<i>Parthenocissus tricuspidata</i>	Boston Ivy	50'	1 gal.	Sun or Shade	* glossy toothed edged 3-lobed leaves, orange to wine red fall color
<i>Wisteria sinensis</i>	Chinese Wisteria	Varies	1 gal.	Sun or Shade	* green leaves divided into 7-13 leaflets, profuse violet-blue drooping flowers

ROCK GARDEN PLANTS

Botanical Name	Common Name	Ht. X Sp.	Min. Size	Sun / Shade	Special Features
<i>Achillea millefolium</i>	Common Yarrow	30-36" X 24"	1 gal.	Sun	* perennial, erect habit, narrow green-gray leaves, flat topped white flowers
<i>Aethionema schistosum</i>	Stonecress	5-10" X 12"	1 gal.	Sun	* perennial, erect habit, narrow gray-blue leaves, fragrant soft pink flowers
<i>Anacyclus depressus</i>	Mount Atlas Daisy	3" X 15"	1 gal.	Sun	* perennial, spreading habit, gray fine leaves, daisylike flowers in summer
<i>Armeria maritima</i> 'Compacta'	Common Thrift	4" X 12"	1 gal.	Sun	* perennial, compact habit, thinleaves, pink globe of flower clusters atop stem
<i>Delosperma cooperi</i>	Purple Hardy Ice Plant	3" X 24"	1 gal.	Lt. Shade	* succulent, spreading habit, cylindrical green leaves, purple flowers in summer
<i>Delosperma nubigenum</i>	Yellow Hardy Ice Plant	1" X 36"	1 gal.	Lt. Shade	* succulent, low habit, cylindrical green leaves turn red in fall, yellow flowers
<i>Iberis sempervirens</i>	Evergreen Candytuft	8-18" X 8-18"	1 gal.	Sun/Pt. Shade	* evergreen perennial, glossy dark green leaves, white flower clusters
<i>Linum flavum</i> 'Compactum'	Compact Golden Flax	6" X 6"	1 gal.	Sun	* perennial, erect habit, green leaves, yellow 5 petal flowers in spring-summer
<i>Penstemon rupicola</i>	Rock Penstemon	4" X 18"	1 gal.	Sun/Pt. Shade	* perennial, trailing habit, small round blue-green leaves, bright pink flowers
<i>Phlox subulata</i>	Moss Pink	6" X 18"	1 gal.	Sun/Pt. Shade	* perennial, spreading habit, needlelike evergreen leaves, pink-lavender flowers
<i>Sedum spathifolium</i> 'Cape Blanco'	Cape Blanco Sedum	3" X 12"	1 gal.	Sun/Pt. Shade	* succulent, spreading habit, spoon shaped blue-green leaves tinged red-purple
<i>Sedum</i> 'Vera Jameson'	Vera Jameson Sedum	8-12" X 15"	1 gal.	Sun/Pt. Shade	* succulent, spreading habit, purple stems w/ pinkish purple leaves, pink flowers

EVERGREEN HEDGE PLANTS

Botanical Name	Common Name	Ht. X Sp.	Min. Size	Sun / Shade	Special Features
<i>Berberis x gladwynensis</i> 'William Penn'	William Penn Barberry	4-5' X 4-5'	24-30" ht.	Sun	round glossy leaf, fast growth, dense foliage, pretty yellow flowers
<i>Buxus sempervirens</i> 'Suffruticosa'	True Dwarf Common Boxwood	4-5' X 4-5'	24-30" ht.	Sun or Shade	slow growth, small waxy dense form and texture leaf
<i>Daphne x burkwoodii</i>	Burkwood Daphne	3-4' X 3-4'	24-30" ht./sp.	Sun/Lt. Shade	erect compact habit, abundant fragrant white to pink flower clusters
<i>Euonymus fortunei</i>	Winter Creeper	2-5' X 3-6'	24-30" ht./sp.	Sun/Pt. Shade	habit varies, green to purple to yellow to variegated foliage color
<i>Ilex crenata</i> 'Convexa'	Compact Japanese Holly	4-6' X 4-6'	24-30" ht.	Sun/Pt. Shade	dense round to erect habit, small green leaves, black berries
<i>Juniperus x pfitzeriana</i> 'Armstrongii'	Armstrong Juniper	4-5' X 4-5'	24-30" ht.	Sun	upright habit, true green foliage, compact growth
<i>Taxus baccata</i> 'Adpressa'	Dwarf English Yew	4-5' X 6-8'	24-30" ht.	Sun or Shade	dense habit, rich dark green needles, compact growth, red fruit
<i>Thuja occidentalis</i> 'Hetz Midget'	Dwarf Arborvitae	3-4' X 3-4'	24-30" ht.	Sun/Pt. Shade	globe habit, dense green foliage, mainy s form
<i>Viburnum hybrids</i> 'Conoy'	Conoy Evergreen Viburnum	4-5' X 4-5'	24-30" ht.	Sun/Pt. Shade	dense habit, dark green foliage with white on underside, fragrant flowers, red berries

THIS PAGE INTENTIONALLY LEFT BLANK



SUSTAINABILITY
STANDARDS

12

Section 12 describes regulations for Sustainability throughout the Badger Mountain South community.

12.A	Introduction.....	12-2
12.B	Sustainability Principles.....	12-2
12.C	Common Standards.....	12-2
12.D	Non-Residential Standards.....	12-3
12.E	Residential Standards.....	12-3

12.A INTRODUCTION

1. In Badger Mountain South, sustainable development means development that looks to the long-term social and environmental health of the community. It is the key concept to what is unique about this community of homes, businesses, schools and play fields. This section provides sustainability goals for Badger Mountain South.
2. The standards and requirements of previous sections of the LUDR relate to the concept of sustainability through the following ways:
 - a. **Compact Design**
Compact design is a recognized element of sustainable development because it allows a reduction of infrastructure, yields a higher proportion of contiguous preserved open space, facilitates transit use, and is more conducive to walking.
 - b. **Mix of Uses**
Permitting a mix of land uses in close proximity creates attractive places to live, provides employment, business and shopping opportunities in close proximity to residences, and encourages alternatives to driving.
 - c. **Connectivity**
Connected open space in Badger Mountain South will provide over 300 acres of parks, trails, and open space connecting neighborhoods, schools, and businesses.
 - d. **Walkability**
Each neighborhood in Badger Mountain South is designed to create multiple destinations within a five-minute walk. The street and trail network provides safe accommodations for pedestrians and easy access to (proposed) neighborhood schools.
 - e. **Housing Choice**
Badger Mountain South will provide a range of housing types and affordability levels to accommodate most any household and to facilitate the creation of intergenerational neighborhoods.
 - f. **Transportation Choice**
The street and trail network will provide multiple ways into the community for vehicles, bicyclists, pedestrians and transit. As build out occurs, transit expansion will likely follow.
3. In this section of the LUDR, more specific direction is provided to address energy and other resource conservation through standards that apply to all buildings and sites. These standards are guided by sustainability principles which follow. At their best, sustainability principles, when applied as standards to the built environment, reconnect people to their community and provide attainable performance targets without limiting innovation.
4. National, sustainable design certifications, including but not limited to, Energy Star, Built Green and LEED, are rating systems that provide guidance to developers and builders to help achieve the sustainability intent of the Badger Mountain South community.

12.B SUSTAINABILITY PRINCIPLES

1. **ENERGY:**
 - a. Promote energy conservation in all aspects of development and life cycle operation.
 - b. Promote production and use of renewable energy.
2. **WATER:**
 - a. Promote water conservation in all aspects of development and life cycle operation.
 - b. Promote re-use, recycling and ground water recharge of rain water and grey water.
3. **TRANSPORTATION:**
 - a. Promote pedestrian, bicycle and community transit modes of transportation.
 - b. Promote a compact, walkable and mixed-use pattern of development.
4. **EXTERIOR LIGHTING:**
 - a. Minimize light trespass from the building and site to achieve:
 - (1) Energy savings
 - (2) Night-sky ambience; and
 - (3) Increased visibility, safety, and security by reducing glare.
5. **RECYCLING:**
 - a. Promote reduction in waste during development and life cycle operation.
 - b. Promote reuse of materials during construction.
 - c. Promote recycling of materials during development and life cycle operation.
6. **HEALTHY LIFESTYLE:**
 - a. Promote an active, healthy lifestyle by connecting areas of activity with non-motorized means of circulation.
 - b. Promote opportunities for active recreation through community-wide trail system as well as provisions for parks and play areas in each neighborhood.
7. **BUILDING MATERIALS:**
 - a. Choose building materials and systems that:
 - (1) Protect and promote indoor air quality;
 - (2) Contain recycled content, or can be recycled;
 - (3) Are extracted, processed, and manufactured regionally;
 - (4) Utilize renewable, salvaged, or FSC Certified materials
8. **URBAN AGRICULTURE:**
 - a. Promote opportunities for community gardening within each neighborhood.

12.C COMMON STANDARDS



Illustrative Photo: Walkable and Sustainable Community

The following Common Standards are applicable to all development within Badger Mountain South. Refer to Section 12.D and 12.E for additional standards specific to use or to District.

1. **ENERGY**
 - a. Include passive and/or active means of allowing for both solar gain where used for passive solar heating as well as sun protection from unwanted solar heat gain.
 - b. Include building space and conduits for future addition of solar hot water or photovoltaic systems on every building. When provided, the use of geo-thermal may substitute for any of the above requirements. Geo-thermal wells and realated infrastructure is permitted in all setback areas.
2. **GREEN BUILDING COMPLIANCE**
 - a. Achieve the minimum level for one of the following green building or energy star rating systems or their equivalent:
 - (1) Built Green – as promoted by the local building trade organization
 - (2) LEED – as promoted the U.S. Green Building Council (www.usgbc.org)
 - (3) Green Globes – as promoted by the Green Building Initiative (www.thegbi.com)
 - (4) National Green Building Standards – 2008 (www.nahbgreen.org) for residential only
 - (5) Energy Star Certification
3. **EXTERIOR LIGHTING**
Goals: Nighttime building illumination should reinforce prominent building design elements yet avoid off-site lighting and night sky pollution. Technologies to reduce light pollution include full cutoff luminaires, low-reflectance, and low-angle spotlights. Computer modeling of commercial project’s site lighting is encouraged.
 - a. For all buildings except Low Rise Residential (under four stories):
 - (1) Submit a Lighting Plan, depicted on the site plan, for all projects with four or more exterior fixtures. The Lighting Plan must include all elements as found in the Glossary for “Lighting Plan”.



Illustrative Photo: Sustainable Community

- (2) Lighting power densities must not exceed ANSI/ASHRAE/IESNA Standard 90.1-2010.
 - (3) Meet exterior lighting control requirements from ANSI/ASHRAE/IESNA Standard 90.1 - 2010.
 - (4) Follow all the requirements that applies to the development proposed as found in ANSI/ASHRAE/IESNA Standard 90.1 - 2010.
 - b. For all Low Rise Residential Buildings (under four stories):
 - (1) Lighting fixtures shall have translucent covers that eliminate glare and have full cutoff features/shielding to prevent direct light from the fixture to shine beyond the property limits where the fixture is installed.
 - (2) Lights of less than 15 watts used for holiday decoration are exempt.
 - (3) Lighting for U.S. flags intended to be properly displayed at night is exempt.
4. **REACH CODES**
 - a. Projects that achieve Passive House Certification shall be deemed compliant with the energy conservation requirement.
 - b. Projects that achieve Living Building Challenge shall be deemed compliant with both the energy conservation requirement, and the green building requirement.

5. **RECOMMENDED ELEMENTS (NOT REQUIRED)**
 - a. Solar Hot Water system
 - b. Photovoltaic system
 - c. LEED Platinum

12.D NON-RESIDENTIAL STANDARDS



Illustrative Photo: Commercial Facility w/ Solar Array Entry Canopy

- 1. Compliance with the Common Standards, 12.C.
- 2. Commercial buildings shall be Energy Star compliant.
- 3. Civic buildings should attempt to meet LEED Silver standard or equivalent rating in an alternate green building rating system.
- 4. Schools: All K-12 schools that receive funding from the Office of the Superintendant of Public Instruction must be built either to the Washington Sustainable Schools Protocol (WSSP) or LEED Silver standard.
- 5. Provide shared parking within Mixed-Use development projects.
- 6. Parking must be organized so that no one surface parking area in any development is larger than two (2) acres. In large developments with multiple surface parking areas, each area shall be defined through the use of landscape and pedestrian access ways.

12.E RESIDENTIAL STANDARDS



Illustrative Photo: Single Family Home with Rooftop Solar Array

- 1. Compliance with the Common Standards, 12.C.
- 2. In order to reduce the energy demand for domestic hot water usage, homes are encouraged to be constructed with one of the following Energy Star - Residential Water Heater Systems:
 - a. Whole-Home Gas Tankless Water Heater
 - b. Gas Condensing Water Heater
 - c. Heat Pump Water Heater
 - d. Solar Water Heater with conventional storage or tankless backup system"
 - e. Or other equivalent system

THIS PAGE INTENTIONALLY LEFT BLANK



SITE
IMPROVEMENT
STANDARDS

13


Section 13 describes regulations for the Site Improvements throughout the Badger Mountain South community.

13.A	Fencing.....	13-2
13.B	Signage.....	13-3- 13-5
13.C	Site Furnishings and Hardscape.....	13-6
13.D	Common Parking Standards.....	13-7

13.A FENCING



Side and Rear Yard Fencing



Wing Fencing with Gate



Front Yard Fencing



Corner Lot Fencing



Iron Fencing



Painted Wood Fencing



Picket Fencing

1. RESIDENTIAL

- a. General Considerations
- (1) A fence is defined as a structural or ornamental barrier separating one exterior space from another. The intent is to create good neighbor fences and make alleys people-friendly by allowing homeowners to view activities in the alley.
 - (2) The heights or elevations of any wall or fence shall be measured from the finished grade natural elevations of the property at or along the applicable points or lines.
 - (3) Cyclone and chain link fences are prohibited. Fences must be constructed of grade #2 (or better) no-hole cedar, masonry, recycled plastic, iron, powder coated steel, or aluminum.
- b. Standards
- (1) Side, rear yard, and Alley fences shall be a maximum of 6 ft. in height. All solid or 0% transparent fences shall consist of 60 inches height solid fencing, with an 12 inches height articulation on top of fence, for a maximum total fence height of 6 ft. Articulation shall be a minimum of 50% transparent, composed of the same material as the fence unless otherwise approved by the City. Height shall be measured from the Natural Grade. Articulation not required in neighborhood edge lots - District.
 - (2) Front fences. (non-corner lots and where not adjacent to pedestrian paths)
 - i. Any fence extended beyond the front of the house, must not exceed 4 ft. in height.
 - ii. Painting of front fences is allowed when painted to complement the exterior color of the residential structure. Any painted fence must be maintained so as to conform to the standards established for fences.
 - (4) (3) No tree, whether in a setback or on private property, shall be used for the attachment or support of any fence or privacy screen.
 - (5) (4) Fence company signs may not be affixed to fences.
 - (6) (5) Fencing in Courtyard Housing and Cottage Court front yards shall be a maximum of 4 ft. high.
 - (7) (6) Hedges may be established as a fence along the front yard or corner lot side yard when the maximum height of

- the plant materials is maintained at 4 ft. or less.
- (8) (7) When trash receptacles, recycling containers and similar are stored outside of a building or other structure, they must be screened with a sight obscuring fence which matches the style and materials of other fencing on the lot and must be one foot ^{higher} than the object being screened.
 - (9) (12) Enclosed Courtyard Screen.
 - i. A solid or semi-solid partition constructed of the same or similar materials or as approved by the City as the principal structure and either partially or completely surrounding an outdoor living space. May extend into the front yard setback no more than 6 ft. beyond the front facade/front porch of the principal structure, but in no event exceed 40 percent of the width of the lot.
 - ii. Must be decoratively embellished on the exterior when a solid screen is built.
 - iii. Maximum height of 6 ft.

2. COMMERCIAL DISTRICT FENCING AND LANDSCAPE/RETAINING WALLS

- a. General Considerations
- (1) Fences and landscape/retaining walls will be reviewed as part of the landscape plan submittal for development applications. A fence is defined as a structural, functional or ornamental barrier separating one exterior space from another.
 - (2) The heights or elevations of any wall or fence shall be measured from the finished grade elevations of the property at or along the applicable points or lines.
 - (3) No cyclone or chain link fences are allowed except as noted below and except that fence posts may be metal or steel enclosed in wood and as noted below. Freestanding concrete and masonry walls shall be minimum 8 inches thick. Wood shall be painted unless natural cedar or redwood is used. Site wall materials should generally match building materials. Metal and iron fencing shall be configured in predominately vertical elements; all metal

- surfaces shall be painted.
- b. Standards
- (1) Acceptable materials for Fences and Landscape/Retaining Walls are as follows:
 - i. Brick, concrete and stone masonry;
 - ii. Architecturally detailed exposed cast-in-place concrete;
 - iii. Stucco, cement based;
 - iv. Wood pickets, lattice and boards; use #2 or better no-hole cedar;
 - v. Painted wrought iron, powder coated steel, or aluminum;
 - vi. Chain link, for rear property lines in the BMS-SD-DR District only;
 - (2) Fences constructed with wood are encouraged to use wood wrapped steel posts.
 - (3) All fences shall be 6 ft. in height or less. Wood wrapped steel posts for fences may be higher than 6 ft. Height shall be measured from the Natural Grade.
 - (4) No tree, whether in a setback or on private property, shall be used for the attachment or support of any fence or privacy screen.
 - (5) Fences along alleys shall be located outside access easement tract.

3. NEIGHBORHOOD STORAGE AREA FENCING

- a. Fencing and Screening Required: Fencing and screening is required around all portions of the lot utilized for the outdoor storage as allowed per Land Use Table, Section 2.C. All fencing and screening shall be installed in accordance with the following requirements:
- (1) Building setbacks. All Neighborhood Storage Areas must be fenced with a secured, black, vinyl coated chain link fence placed 10 ft. from the front sidewalk, 6 ft. from side property line, 6 ft. from rear property line.
 - (2) Minimum Fence Height. Fencing of outdoor storage areas shall be constructed to a minimum height as follows:
 - i. 6 ft. in height in BMS-NG district.
 - (3) These standards supersede the parking placement standards by District, section 3.

- b. Landscape screening, See 11.C.8 for storage facility screening.
- c. Maintenance Required. Fences, walls and landscaping surrounding outdoor storage areas shall be well maintained and kept free of litter, posters, signs and trash.

4. COMMUNITY STORAGE FACILITY FENCING

- a. Community Storage Facility fencing and screening shall comply with all Neighborhood Storage Area Standards in 13.A.3 except that:
- (1) Minimum Fence Height. Fencing of outdoor storage areas shall be constructed to a minimum height of 8 ft. tall in the BMS-NC-P Overlay District.

(3) Front Fences - Corner Lots and where adjacent to pedestrian paths

- i. Fencing along the primary front yard must not exceed 5 ft. in height and must be located at or behind the rear half of the home.
- ii. Fencing along the flanking front yard must not exceed 5 ft. in height along the rear half of the home elevation; setback minimum 1 ft. from the inside edge of the sidewalk
- iii. Fencing along the flanking front yard must not exceed 5 ft. in height along the front half of the home elevation; setback minimum 10 feet from the inside edge of the sidewalk.

1. SIGNAGE STANDARDS - ALL DISTRICTS

Signs erected in Badger Mountain South must comply with the standards set forth in the LUDR and the application processes and permits identified in RMC 27.04.

a. General Considerations

- (1) Badger Mountain South signage goals are as follows:
 - i. Provide effective wayfinding for all visitors and others to the community;
 - ii. Provide visibility for commercial and other business uses;
 - iii. Encourage signage that is expressive of the image of the community; and
 - iv. Express timeless design that is harmonious with buildings and open spaces.
- (2) Signs shall be designed and installed to enhance both the building and the streetscape. Creative, detailed, artistic and unique signage is encouraged.
- (3) The use of icons, symbols, graphic logos or designs that represent a service or occupation are preferable to standardized corporate logos.
- (4) All exterior signs shall comply with the City of Richland Sign Code. All signs must be professionally designed and installed, and must be well maintained.

b. Construction Signs

- (1) One sign, identifying the builder/general contractor, is permitted during the course of construction. The sign must be single-sided and may include the builder's logo, company name and phone number and be of his own design and choice of colors. Architect/designer identification may be incorporated into this sign but may not be a separate sign attached to the builder sign.
- (2) Builder signs shall be limited to 48 inches x 48 inches in size, installed with a single or double post no higher than 66 inches (measured from existing grade) and mounted so that the bottom of the sign is within 18 inches of the surrounding grade and must be placed parallel to the road. Signs must be removed as soon as the building is occupied or when construction is completed. Builder/architect information boxes are permitted during the course of construction. No separate subcontractor or consultant signs are allowed.

c. For Sale and For Lease Signage

- (1) One "for sale" or "for lease" sign is permitted for each building or each group of attached buildings or group of zero lot line buildings. The maximum sign size is 4 ft. by 4 ft.. These signs shall be mounted so that the bottom of the sign is within 18 inches of the surrounding grade (signs must be placed parallel to the street frontage and the sign may be located inside the building). For Sale / For Lease signs must be well maintained and professionally produced.

d. Special Event Signage

- (1) A sign which is to be displayed for a limited period of time only, not to exceed 20 days, and includes, but is not limited to, banners, pendants, streamers, fabric signs, clusters of flags, subject to RMC 27.08.010F(2).

e. Signs Permitted by Right

- (1) Home occupation signs no larger than 2 sq. ft.
- (2) Only one movable A-frame sign is permitted per business to be displayed only during the hours of 8:00 a.m. to 9:00 p.m. or to closing, whichever is earlier, on days the business displaying such sign is open and, which shall not exceed 6 sq. ft. in size per face and shall not exceed 4 ft. in height.
- (3) Bus shelter signs including a directory of sponsors, bus route maps/information and art work in bus shelters, not to exceed 4 sq. ft..



Commercial Building Sign



Awning Signage



Directory Signage



Monument Signage



Projecting Signage



Wall Signage

- (4) Flags of country, state, city or other governmental body, and not to exceed 25 sq. ft. in area.
- (5) Garage/yard sale. Two movable signs allowed per sale, not to exceed 6 sq. ft. per sign face; not to be posted for longer than three days prior to sale; and not be placed on public utility poles.
- (6) Real estate signs. Directional arrow signs are to be used solely for directing people to a house for sale or lease, or a condominium unit for sale. They may not be used for advertising of sale or lease opportunities of commercial property. They may not be used for any properties outside the City limits.

f. Sign Lighting

- (1) Signs may not be top lit with single or multiple sources. The light source may not be visible from a public right of way and may not shine up into the night sky. Seasonal decorative lighting is permitted.

g. Removal of Abandoned Signs

- (1) It is the responsibility of the property owner to remove any abandoned sign within two days of the cessation of its use.

h. Removal of Non-Conforming Signs

- (1) Any signs which are deemed to be nonconforming will be removed and held for 14 days; after which time they will be destroyed, if not retrieved by the responsible party.

i. Neighborhood and Entry Way Signage

- (1) Neighborhood identification and/or entry way signage must meet the standards found for Monument Signage, Section 13.B.3.d.(1).

j. Prohibited Signs

- (1) Internally illuminated signs, with the exception of neon signs.
- (2) Inflatable balloon or balloon-like figures greater than 36 inches in any dimension of animals or any other objects or characters.
- (3) Signs on roofs, chimneys and balconies.
- (4) Pole signs and other freestanding signs over 6 ft. in height.
- (5) Billboards.
- (6) Off-site signs or advertising.
- (7) Flashing, animated, blinking, moving or mobile signs including portable reader board signs.
- (8) Sign on or affixed to a rock, tree or other natural feature.
- (9) Private sign placed in right-of-way.
- (10) Banners, except for public events.

2. SIGNAGE STANDARDS: BMS-SD-DR, BMS-SD-SR, AND BMS-SD-CMU DISTRICTS

a. Awning Signage

- (1) Maximum sign area shall be 6 sq. ft. on the main awning face or 3 sq. ft. of the awning valance.
- (2) Lettering and signboard may be integrated along the valance or awning fascia.
- (3) No backlit awning signs are permitted.

b. Building Signage Allowance

- (1) Each commercial building may have a maximum of two signs to identify the name of the building. These signs must be integral to the architecture and building design and convey a sense of permanence. Typically these signs are secondary or tertiary building elements as seen on historic urban buildings. Buildings on corner lots may have a maximum of three signs.
- (2) Building signs must conform to the following:
 - i. Maximum sign area shall be no more than 20 sq. ft. per building face except when the sign includes a company logo in which case it may increase in area to 36 sq. ft.
 - Maximum sign height shall be 18 ft. above the sidewalk to the top of the sign (measured from the top of the sign to the lowest point on the sidewalk directly below the sign) unless signage is positioned on a cupola or other architectural feature that extends beyond the ordinary roof height.

c. Directory Signage

- (1) Each building may have one directory sign immediately adjacent to the front/main entry and any rear entry to the building.
- (2) Directory signs shall be limited to 12 sq. ft. in area, and their design shall integrate with the color and materials of the building.

d. Marquee Sign

- (1) Where movie theater use or Gambling Premise use is permitted within District, a projecting marquee sign up to 120 sq.ft. per two sides, may be attached to building facade.

e. Monument Signage

- (1) General Standards Applicable to all Monument Signs:
 - i. Monument signs need to be located within a landscaped planter. The minimum area of the planter shall be equal to the total area of the sign located within the planter.
 - ii. The exterior finish, color and materials of the sign cabinet need to complement the colors and materials of the building that the advertised business occupies.

- iii. Monument signs for multiple-tenant commercial centers with 6 or more tenant spaces shall focus on identifying the name of the center and/or its largest tenants, rather than on all tenants.
- iv. No monument signs are permitted in line of sight triangles next to driveway locations. The line of sight measures 7 ft. by 50 ft..
- v. No monument signs are permitted in the line of sight triangles adjacent to a corner. This line of sight triangle measures 25 ft. by 25 ft..
- vi. When more than one monument sign is permitted on any parcel, the signs may be located no closer than 300 ft. from one another.
- vii. All monument signs need to include numeric street address of the property upon which it is located. The numbers used to identify the address shall be no less than 9 inches and no more than 15 inches in height.
- viii. All background surfaces must be of an opaque material that does not emit light.

(2) Monument Sign Standards:

- i. Individual Business: An individual business located on a separate lot and not legally part of a multi-business development may use one monument sign as either a primary sign or a secondary sign. The sign may not be located closer than 3 ft. from any property line. The overall height of the sign, not including the base measurement, shall not exceed 12 ft., except in the BMS-DR District where the overall height of the sign shall not exceed 20 ft.. No more than 1 monument sign shall be erected for any 1 business. No sign shall obstruct the view of motor vehicle operators entering or leaving any parking area, service drive, private driveway, street, alley or other thoroughfare.

1. SIGNAGE STANDARDS - ALL DISTRICTS

- Signs erected in Badger Mountain South must comply with the standards set forth in the LUDR and the application processes and permits identified in RMC 27.04.
- a. General Considerations
- (1) Badger Mountain South signage goals are as follows:
- i. Provide effective way-finding for all visitors and others to the community;
 - ii. Provide visibility for commercial and other business uses;
 - iii. Encourage signage that is expressive of the image of the community; and
 - iv. Express timeless design that is harmonious with buildings and open spaces.
- (2) Signs shall be designed and installed to enhance both the building and the streetscape. Creative, detailed, artistic and unique signage is encouraged.
- (3) The use of icons, symbols, graphic logos or designs that represent a service or occupation are preferable to standardized corporate logos.
- (4) All exterior signs shall comply with the City of Richland Sign Code. All signs must be professionally designed and installed, and must be well maintained.
- b. Construction Signs
- (1) One sign, identifying the builder/general contractor, is permitted during the course of construction. The sign must be single-sided and may include the builder's logo, company name and phone number and be of his own design and choice of colors. Architect/designer identification may be incorporated into this sign but may not be a separate sign attached to the builder sign.
- (2) Builder signs shall be limited to 48 inches x 48 inches in size, installed with a single or double post no higher than 66 inches (measured from existing grade) and mounted so that the bottom of the sign is within 18 inches of the surrounding grade and must be placed parallel to the road. Signs must be removed as soon as the building is occupied or when construction is completed. Builder/architect information boxes are permitted during the course of construction. No separate subcontractor or consultant signs are allowed.
- c. For Sale and For Lease Signage
- (1) One "for sale" or "for lease" sign is permitted for each building or each group of attached buildings or group of zero lot line buildings. The maximum sign size is 4 ft. by 4 ft.. These signs shall be mounted so that the bottom of the sign is within 18 inches of the surrounding grade (signs must be placed parallel to the street frontage and the sign may be located inside the building). For Sale / For Lease signs must be well maintained and professionally produced.
- d. Special Event Signage
- (1) A sign which is to be displayed for a limited period of time only, not to exceed 20 days, and includes, but is not limited to, banners, pendants, streamers, fabric signs, clusters of flags, ~~subject to RMC 27.08.010F(2)~~
- e. Signs Permitted by Right
- (1) Home occupation signs no larger than 2 sq. ft.
- (2) Only one movable A-frame sign is permitted per business to be displayed only during the hours of 8:00 a.m. to 9:00 p.m. or to closing, whichever is earlier, on days the business displaying such sign is open and, which shall not exceed 6 sq. ft. in size per face and shall not exceed 4 ft. in height.
- (3) Bus shelter signs including a directory of sponsors, bus route maps/information and art work in bus shelters, not to exceed 4 sq. ft..



Commercial Building Sign



Awning Signage



Directory Signage



Monument Signage



Projecting Signage



Wall Signage

- (4) Flags of country, state, city or other governmental body, and not to exceed 25 sq. ft. in area.
- (5) Garage/yard sale. Two movable signs allowed per sale, not to exceed 6 sq. ft. per sign face; not to be posted for longer than three days prior to sale; and not be placed on public utility poles.
- (6) Real estate signs. Directional arrow signs are to be used solely for directing people to a house for sale or lease, or a condominium unit for sale. They may not be used for advertising of sale or lease opportunities of commercial property. They may not be used for any properties outside the City limits.
- f. Sign Lighting
- (1) Signs may not be top lit with single or multiple sources. The light source may not be visible from any public right of way and may not shine up into the night sky. Seasonal decorative lighting is permitted.
- g. Removal of Abandoned Signs
- (1) It is the responsibility of the property owner to remove any abandoned sign within two days of the cessation of its use.
- h. Removal of Non-Conforming Signs
- (1) Any signs which are deemed to be nonconforming will be removed and held for 14 days; after which time they will be destroyed, if not retrieved by the responsible party.
- i. Neighborhood and Entry Way Signage
- (1) Neighborhood identification and/or entry way signage must meet the standards found for Monument Signage, Section 13.B.3.d.(1).
- j. Prohibited Signs
- (1) Internally illuminated signs, with the exception of neon signs. *
- (2) Inflatable balloon or balloon-like figures greater than 36 inches in any dimension of animals or any other objects or characters.
- (3) Signs on roofs, chimneys and balconies.
- (4) Pole signs and other freestanding signs over 6 ft. in height. *
- (5) Billboards.
- (6) Off-site signs or advertising.
- (7) Flashing, animated, blinking, moving or mobile signs including portable reader board signs.
- (8) Sign on or affixed to a rock, tree or other natural feature.
- (9) Private sign placed in right-of-way.
- (10) Banners, except for public events.
- (11) Electronic reader boards, unless otherwise specified.
- * Except for signs in the BMS SD-DR and BMS SD-CMU districts, as authorized in Section 13.B.7 and 13.B.8.

2. SIGNAGE STANDARDS: BMS-SD-DR, BMS-SD-SR, AND BMS-SD-CMU DISTRICTS

- a. Awning Signage
- (1) Maximum sign area shall be 6 sq. ft. on the main awning face or 3 sq. ft. of the awning valance.
- (2) Lettering and signboard may be integrated along the valance or awning fascia.
- (3) No backlit awning signs are permitted.
- b. Building Signage Allowance
- (1) Each commercial building may have a maximum of two signs to identify the name of the building. These signs must be integral to the architecture and building design and convey a sense of permanence. Typically these signs are secondary or tertiary building elements as seen on historic urban buildings. Buildings on corner lots may have a maximum of three signs.
- (2) Building signs must conform to the following:
- i. Maximum sign area shall be no more than 20 sq. ft. per building face except when the sign includes a company logo in which case it may increase in area to 36 sq. ft.
 - ii. Maximum sign height shall be 18 ft. above the sidewalk to the top of the sign (measured from the top of the sign to the lowest point on the sidewalk directly below the sign) unless signage is positioned on a cupola or other architectural feature that extends beyond the ordinary roof height.
- c. Directory Signage
- (1) Each building may have one directory sign immediately adjacent to the front/main entry and to any rear entry to the building.
- (2) Directory signs shall be limited to 12 sq. ft. in area, and their design shall integrate with the color and materials of the building.
- d. Marquee Sign
- (1) Where movie theater use or Gambling Premise use is permitted within District, a projecting marquee sign up to 120 sq.ft. per two sides, may be attached to building facade.
- e. Monument Signage
- (1) General Standards Applicable to all Monument Signs:
- i. Monument signs need to be located within a landscaped planter. The minimum area of the planter shall be equal to the total area of the sign located within the planter.
 - ii. The exterior finish, color and materials of the sign cabinet need to complement the colors and materials of the building that the advertised business occupies.

- iii. Monument signs for multiple-tenant commercial centers with 6 or more tenant spaces shall focus on identifying the name of the center and/or its largest tenants, rather than on all tenants.
- iv. No monument signs are permitted in line of sight triangles next to driveway locations. The line of sight measures 7 ft. by 50 ft..
- v. No monument signs are permitted in the line of sight triangles adjacent to a corner. This line of sight triangle measures 25 ft. by 25 ft..
- vi. When more than one monument sign is permitted on any parcel, the signs may be located no closer than 300 ft. from one another.
- vii. All monument signs need to include numeric street address of the property upon which it is located. The numbers used to identify the address shall be no less than 9 inches and no more than 15 inches in height.
- viii. All background surfaces must be of an opaque material that does not emit light.
- (2) Monument Sign Standards:
- i. Individual Business: An individual business located on a separate lot and not legally part of a multi-business development may use one monument sign as either a primary sign or a secondary sign. The sign may not be located closer than 3 ft. from any property line. The overall height of the sign, not including the base measurement, shall not exceed 12 ft., except in the ~~BMS-DR District~~ where the overall height of the sign shall not exceed 24 ft. No more than 1 monument sign shall be erected for any 1 business. No sign shall obstruct the view of motor vehicle operators entering or leaving any parking area, service drive, private driveway, street, alley or other thoroughfare.

BMS-SD-DR and BMS-SD-CMU districts

13.B SIGNAGE continued



Awning Signage Directory Sign Monument Sign Blade or Projecting Signage Wall Signage Window Signage Public Way-Finding Signage Monument Signage

2. SIGNAGE STANDARDS: BMS-SD-DR, BMS-SD-SR, AND BMS-SD-CMU DISTRICTS continued

- ii. Multi-business Development: Monument signs are permitted for the purpose of identifying the development and the tenant or occupants of any multi-business development. A development shall mean one or more buildings under a common development scheme or common ownership. One monument sign may be erected for the purpose of identifying the development and some or all of the tenants or occupants of the development at each point of vehicle entrance from public right-of-way to such development. A monument sign shall not exceed 12 ft. in height and 120 sq. ft. total for all faces with a maximum of 60 sq. ft. for any 1 face, except in the BMS-DR District where the overall height of the sign shall not exceed 20 ft. in height and 200 sq. ft. total for all faces with a maximum of 100 sq. ft. for any one face. For retail developments with 6 or more tenants, at least 25 percent of each sign face shall identify the development. For retail development with fewer than 4 tenants, identification of the development is not required, but if the retail development is identified on the sign then at least 25 percent of each sign face shall identify the development. Each panel identifying a tenant shall be at least 14 inches high with letters and/or logo at least 8 inches high. Neither the portion of the sign structure providing support nor the frame shall be counted in determining the square footage of the sign.
- iii. Each sign shall be located at least 3 ft. from any vehicle entrance. No sign shall obstruct the view of motor vehicles operators entering or leaving any parking area, service drive, private driveway, street, alley, or other thoroughfare.
- f. Projecting and Blade Signage
 - (1) Maximum sign area shall be 4 sq. ft. (per side).
 - (2) The sign must be located with the lower edge of the signboard no closer than 8 ft. to the sidewalk and the top of the sign no more 14 ft. above the sidewalk.
 - (3) For multi-story buildings, at the ground floor tenant space signage, the top signboard edge shall be no higher than the sill or bottom of the average second story window height.
 - (4) Distance from building wall to signboard shall be a maximum of 6 inches.
 - (5) Maximum signboard width shall be 3 ft. with no dimension to exceed 3 ft.
 - (6) Occupants/tenants above the street level are prohibited from having projecting blade signage.

- g. Tenant/Occupant Signage
 - (1) Each building may have a total of 2 signs per tenant/occupant identifying the leased/occupied space. These signs must be located on or immediately adjacent to the primary entry to the tenant's/occupant's space. Tenants/occupants may select from the following sign types: Awning, Projecting/Blade or Wall.
 - (2) Tenants/occupants may also have one street level storefront (window, glass door or A-board) sign.
- h. Wall Signage
 - (1) Unless regulated elsewhere in the LUDR, maximum sign area shall be a maximum of 20 sq. ft..
 - (2) The sign shall be located on the tenant's portion of the building. Maximum sign height for multiple story buildings shall be 14 ft. above the sidewalk to the top of the sign. The maximum sign height for single story buildings is 18 ft. above the sidewalks to the top of the sign. The measurement is from the top of the sign to the lowest point on the sidewalk directly below the sign.
 - (3) Applied lettering may be substituted for wall signs. Lettering must fit within the size criteria above.
 - (4) Wall signs that are designed as a mural or other artistic application may be larger in size. Only the portion of the painted wall mural which contains a logo, trademark or other commercial message shall be governed by the requirements in Section 13. B.2.g. Wall preparation, anti-graffiti coating and ultraviolet coating, for walls with southern exposure, shall be required.
- i. Window Signage
 - (1) Maximum sign area shall be 4 sq. ft.
- j. Portals, Gateways, and Entries Signage
 - (1) Neighborhood identification or entry way signage signs must meet the standards of Monument Signage, Section 13.B.3.d.(1), unless intended to be constructed as public art or include other significant architectural features, or,
 - (2) Entryway sign into the community or neighborhood which arch over the public-right-of-way. Must meet the following standards:
 - i. Any sign over a city street must be a minimum of 16 ft. from the street surface.
 - ii. Signs and sign-supporting structures shall be listed by a recognized testing laboratory and constructed in compliance with the requirements of the International Building Code as adopted by the City.
 - iii. Signs must possess unique architectural features such as materials, artwork or lettering, and may be constructed as part of a major entryway into the community.

- iv. Sign base may be surrounding by landscape materials.
- v. Applicable standards and licensing requirements in RMC 5.14 apply.

3. SIGNAGE STANDARDS: BMS-VMU DISTRICT

- a. Awning Signage
 - (1) Maximum sign area shall be 3 sq. ft. on the main awning face or 1.5 sq. ft. of the awning valance.
- b. Building Signage Allowance
 - (1) Each building may have a maximum of two signs to identify the name of the building. These signs must be integrated within the architectural element to which they reside, to convey permanence and create historic precedence. Typically these signs are secondary or tertiary building elements as seen on historic commercial/industrial buildings.
 - (2) Building signs must conform to the following:
 - i. Maximum sign area shall be no more than 4 sq. ft.
 - ii. The sign shall be located between 14 and 18 ft. above the sidewalk to the top of the sign (measured from the top of the sign to the lowest point on the sidewalk directly below the sign).
- c. Directory Signage
 - (1) Each building may have one directory sign immediately adjacent to the front/main and to any rear entry to the building.
 - (2) Directory signs shall be limited to 12 sq. ft. in area, and their design shall integrate with the color and materials of the building.
- d. Monument Signage
 - (1) Individual Business: An individual business located on a separate lot and not legally part of a multi-business development may use one monument sign as either a primary sign or a secondary sign. The sign may not be located closer than 3 ft. from any property line. The overall height of the sign shall not exceed 10 ft.. No more than one monument sign shall be erected for any one business. No sign shall obstruct the view of motor vehicle operators entering or leaving any parking area, service drive, private driveway, street, alley or other thoroughfare. Each lot, less than 39,000 sq. ft. as originally platted, may have one monument sign. The monument sign may be a maximum of 9 sq. ft., not including the sign base, and have no dimension exceeding 5 ft., including the sign base. Sign height, including the sign base, will be measured from original grade. The sign must be located within 25 ft. of the primary vehicular entry and within 10 ft. of the front property line.

- (2) Multi-business Development: Monument signs are permitted for the purpose of identifying the development and the tenant or occupants of any multi-business development. A development shall mean one or more buildings under a common development scheme or common ownership. One monument sign may be erected for the purpose of identifying the development and some or all of the tenants or occupants of the development at each point of vehicle entrance from public right-of-way to such development. A monument sign shall not exceed 10 ft. in height and 100 sq. ft. total for all faces with a maximum of 50 sq. ft. for any one face.
- (3) For retail developments with 4 or more tenants, at least 25 percent of each sign face shall identify the development. For retail development with fewer than 4 tenants, identification of the development is not required, but if the retail development is identified on the sign then at least 25 percent of each sign face shall identify the development. Each panel identifying a tenant shall be at least 14 inches high with letters and/or logo at least 8 inches high. Neither the portion of the sign structure providing support nor the frame shall be counted in determining the square footage of the sign.
- (4) Each sign shall be located at least 3 ft. from any vehicle entrance. No sign shall obstruct the view of motor vehicles operators entering or leaving any parking area, service drive, private driveway, street, alley, or other thoroughfare.
- e. Projecting and Blade Signage
 - (1) Maximum sign area shall be 2 sq. ft. (per side).
 - (2) The sign must be located with the lower edge of the signboard no closer than 8 ft. to the sidewalk and the top of the sign no more 14 ft. above the sidewalk.
 - (3) For multi-story buildings, at the ground floor tenant space signage, the top signboard edge shall be no higher than the sill or bottom of the average second story window height.
 - (4) Distance from building wall to signboard shall be a maximum of 6 inches.
 - (5) Maximum signboard width shall be 2 ft. with no dimension to exceed 3 ft.
 - (6) The second story tenants are prohibited from having projecting blade signage.
- f. Tenant/Occupant Signage
 - (1) Each building may have a total of 1 sign per tenant/occupant identifying the leased/occupied space. This sign must be located on or immediately adjacent to the primary entry to the tenant's/occupant's space. Tenants/occupants may select from the following types: Awning, Projecting/Blade, Neon, Wall and Window.

13.B SIGNAGE continued



Awning Signage Directory Sign Monument Sign Blade or Projecting Signage Wall Signage Window Signage Public Way-Finding Signage Monument Signage

2. SIGNAGE STANDARDS: BMS-SD-DR, BMS-SD-SR, AND BMS-SD-CMU DISTRICTS continued

- ii. Multi-business Development: Monument signs are permitted for the purpose of identifying the development and the tenant or occupants of any multi-business development. A development shall mean one or more buildings under a common development scheme or common ownership. One monument sign may be erected for the purpose of identifying the development and some or all of the tenants or occupants of the development at each point of vehicle entrance from public right-of-way to such development. A monument sign shall not exceed 12 ft. in height and 120 sq. ft. total for all faces with a maximum of 60 sq. ft. for any 1 face, except in the ~~BMS-DR~~ District where the overall height of the sign shall not exceed 20 ft. in height and 200 sq. ft. total for all faces with a maximum of 100 sq. ft. for any one face. For retail developments with 6 or more tenants, at least 25 percent of each sign face shall identify the development. For retail development with fewer than 4 tenants, identification of the development is not required, but if the retail development is identified on the sign then at least 25 percent of each sign face shall identify the development. Each panel identifying a tenant shall be at least 14 inches high with letters and/or logo at least 8 inches high. Neither the portion of the sign structure providing support nor the frame shall be counted in determining the square footage of the sign.
- iii. Each sign shall be located at least 3 ft. from any vehicle entrance. No sign shall obstruct the view of motor vehicles operators entering or leaving any parking area, service drive, private driveway, street, alley, or other thoroughfare.
- f. Projecting and Blade Signage
 - (1) Maximum sign area shall be 4 sq. ft. (per side).
 - (2) The sign must be located with the lower edge of the signboard no closer than 8 ft. to the sidewalk and the top of the sign no more 14 ft. above the sidewalk.
 - (3) For multi-story buildings, at the ground floor tenant space signage, the top signboard edge shall be no higher than the sill or bottom of the average second story window height.
 - (4) Distance from building wall to signboard shall be a maximum of 6 inches.
 - (5) Maximum signboard width shall be 3 ft. with no dimension to exceed 3 ft.
 - (6) Occupants/tenants above the street level are prohibited from having projecting blade signage.

- g. Tenant/Occupant Signage
 - (1) Each building may have a total of 2 signs per tenant/occupant identifying the leased/occupied space. These signs must be located on or immediately adjacent to the primary entry to the tenant's/occupant's space. Tenants/occupants may select from the following sign types: Awning, Projecting/Blade or Wall.
 - (2) Tenants/occupants may also have one street level storefront (window, glass door or A-board) sign.
- h. Wall Signage
 - (1) Unless regulated elsewhere in the LUDR, maximum sign area shall be a maximum of 20 sq. ft..
 - (2) The sign shall be located on the tenant's portion of the building. Maximum sign height for multiple story buildings shall be 14 ft. above the sidewalk to the top of the sign. The maximum sign height for single story buildings is 18 ft. above the sidewalks to the top of the sign. The measurement is from the top of the sign to the lowest point on the sidewalk directly below the sign.
 - (3) Applied lettering may be substituted for wall signs. Lettering must fit within the size criteria above.
 - (4) Wall signs that are designed as a mural or other artistic application may be larger in size. Only the portion of the painted wall mural which contains a logo, trademark or other commercial message shall be governed by the requirements in Section 13.B.2.g. Wall preparation, anti-graffiti coating and ultraviolet coating, for walls with southern exposure, shall be required.
- i. Window Signage
 - (1) Maximum sign area shall be 4 sq. ft.
- j. Portals, Gateways, and Entries Signage
 - (1) Neighborhood identification or entry way signage signs must meet the standards of Monument Signage, Section 13.B.3.d.(1), unless intended to be constructed as public art or include other significant architectural features, or,
 - (2) Entryway sign into the community or neighborhood which arch over the public-right-of-way. Must meet the following standards:
 - i. Any sign over a city street must be a minimum of 16 ft. from the street surface.
 - ii. Signs and sign-supporting structures shall be listed by a recognized testing laboratory and constructed in compliance with the requirements of the International Building Code as adopted by the City.
 - iii. Signs must possess unique architectural features such as materials, artwork or lettering, and may be constructed as part of a major entryway into the community.

- iv. Sign base may be surrounding by landscape materials.
- v. Applicable standards and licensing requirements in RMC 5.14 apply.

3. SIGNAGE STANDARDS: BMS-VMU DISTRICT

- a. Awning Signage
 - (1) Maximum sign area shall be 3 sq. ft. on the main awning face or 1.5 sq. ft. of the awning valance.
- b. Building Signage Allowance
 - (1) Each building may have a maximum of two signs to identify the name of the building. These signs must be integrated within the architectural element to which they reside, to convey permanence and create historic precedence. Typically these signs are secondary or tertiary building elements as seen on historic commercial/industrial buildings.
 - (2) Building signs must conform to the following:
 - i. Maximum sign area shall be no more than 4 sq. ft.
 - ii. The sign shall be located between 14 and 18 ft. above the sidewalk to the top of the sign (measured from the top of the sign to the lowest point on the sidewalk directly below the sign).
- c. Directory Signage
 - (1) Each building may have one directory sign immediately adjacent to the front/main and to any rear entry to the building.
 - (2) Directory signs shall be limited to 12 sq. ft. in area, and their design shall integrate with the color and materials of the building.
- d. Monument Signage
 - (1) Individual Business: An individual business located on a separate lot and not legally part of a multi-business development may use one monument sign as either a primary sign or a secondary sign. The sign may not be located closer than 3 ft. from any property line. The overall height of the sign shall not exceed 10 ft.. No more than one monument sign shall be erected for any one business. No sign shall obstruct the view of motor vehicle operators entering or leaving any parking area, service drive, private driveway, street, alley or other thoroughfare. Each lot, less than 39,000 sq. ft. as originally platted, may have one monument sign. The monument sign may be a maximum of 9 sq. ft., not including the sign base, and have no dimension exceeding 5 ft., including the sign base. Sign height, including the sign base, will be measured from original grade. The sign must be located within 25 ft. of the primary vehicular entry and within 10 ft. of the front property line.

- (2) Multi-business Development: Monument signs are permitted for the purpose of identifying the development and the tenant or occupants of any multi-business development. A development shall mean one or more buildings under a common development scheme or common ownership. One monument sign may be erected for the purpose of identifying the development and some or all of the tenants or occupants of the development at each point of vehicle entrance from public right-of-way to such development. A monument sign shall not exceed 10 ft. in height and 100 sq. ft. total for all faces with a maximum of 50 sq. ft. for any one face.
- (3) For retail developments with 4 or more tenants, at least 25 percent of each sign face shall identify the development. For retail development with fewer than 4 tenants, identification of the development is not required, but if the retail development is identified on the sign then at least 25 percent of each sign face shall identify the development. Each panel identifying a tenant shall be at least 14 inches high with letters and/or logo at least 8 inches high. Neither the portion of the sign structure providing support nor the frame shall be counted in determining the square footage of the sign.
- (4) Each sign shall be located at least 3 ft. from any vehicle entrance. No sign shall obstruct the view of motor vehicles operators entering or leaving any parking area, service drive, private driveway, street, alley, or other thoroughfare.
- e. Projecting and Blade Signage
 - (1) Maximum sign area shall be 2 sq. ft. (per side).
 - (2) The sign must be located with the lower edge of the signboard no closer than 8 ft. to the sidewalk and the top of the sign no more 14 ft. above the sidewalk.
 - (3) For multi-story buildings, at the ground floor tenant space signage, the top signboard edge shall be no higher than the sill or bottom of the average second story window height.
 - (4) Distance from building wall to signboard shall be a maximum of 6 inches.
 - (5) Maximum signboard width shall be 2 ft. with no dimension to exceed 3 ft.
 - (6) The second story tenants are prohibited from having projecting blade signage.
- f. Tenant/Occupant Signage
 - (1) Each building may have a total of 1 sign per tenant/occupant identifying the leased/occupied space. This sign must be located on or immediately adjacent to the primary entry to the tenant's/occupant's space. Tenants/occupants may select from the following types: Awning, Projecting/Blade, Neon, Wall and Window.

3. SIGNAGE STANDARDS: BMS-VMU DISTRICT continued

- g. Wall Signage
- (1) Unless regulated elsewhere in the LUDR, maximum sign area shall be 1% of the tenant's portion of the ground floor area or 10 sq. ft., whichever is less.
 - (2) Wall sign shall be located on the tenant's portion of the building. Maximum sign height shall be 14 ft. above the sidewalk to the top of the sign (measured from the top of the sign to the lowest point on the sidewalk directly below the sign).
 - (3) Applied lettering may be substituted for wall signs. Lettering must fit within the size criteria above.
 - (4) Wall signs that are designed as a mural or other artistic application may be larger in size. Only the portion of the painted wall mural which contains a logo, trademark or other commercial message shall be governed by the requirements in Section 13. B.2.g. Wall preparation, anti-graffiti coating and ultraviolet coating, for walls with southern exposure, shall be required.
 - (5) Wall sign shall be located on the tenant's portion of the building. Maximum sign height shall be 18 ft. above the sidewalk to the top of the sign (measured from the top of the sign to the lowest point on the sidewalk directly below the sign).
 - (6) Applied lettering may be substituted for wall signs. Lettering must fit within the size criteria above.
- h. Window Signage
- (1) Maximum sign area shall be 4 sq. ft.

4. SIGNAGE STANDARDS: COMMUNITY FACILITIES/PLACE OF WORSHIP

- a. Each noncommercial use, such as places of worship, schools, city parks, fire stations, police stations, municipal buildings, public libraries, community centers, and other similar noncommercial uses, may have no more than one monument or one wall sign for each street frontage. A monument sign shall not exceed 24 sq. ft. in area per face, shall be setback a minimum of 2 ft. from the property line, and shall not exceed 5 ft. in height. A wall sign shall not exceed 32 sq. ft. in area and shall not exceed 15 ft. in height. All community facilities/ place of worship signs shall be designed in keeping with the character of the neighborhood and shall be constructed of durable materials.
- b. Public way-finding and site feature identification signs are permitted in Civic Districts and do not count as part of the noncommercial square footage.

5. SIGNAGE STANDARDS: BMS-NC, NG AND NE DISTRICTS

- a. Live/work signage.
- A sign up to 3 sq. ft. containing the name of the proprietor, business and/or a graphic image representing the business shall be allowed. The sign shall be attached to the dwelling, be compatible with the architectural character of the neighborhood and shall not be illuminated or backlit. Only one sign shall be allowed.
- b. Bed and Breakfast and home occupation signage.
- (1) A bed and breakfast operation as a home occupation, and all other home occupations, shall be allowed a sign up to 2 sq. ft., containing only the name of the proprietor or the name of the residence. The sign shall be attached to the dwelling, be compatible with the architectural character of the neighborhood and shall not be illuminated or backlit. Only one sign shall be allowed.
- c. Day care and adult family home signage.
- (1) Licensed family day care and adult family home centers shall be allowed a sign up to 2 sq. ft., containing only the name of the proprietor or the name of the residence. The sign shall be attached to the dwelling and shall not exceed 2 sq. ft. in area. The sign shall be compatible with the architectural character of the neighborhood and shall not be illuminated or backlit. Only one sign shall be allowed.
 - (2) Licensed day care centers on lots one acre and larger may have one monument sign that meets the standards in 13.B.3.d.1.
- d. Senior housing, nursing homes and assisted living facilities signage. Signage shall conform to the sign standards for the VMU District, 13.B.3.

6. SIGNAGE STANDARDS: VEHICULAR SERVICE STATION

- a. Vehicular service stations selling motor fuel to the public, including those with convenience stores, accessory restaurants or other retail, self-service car washes, and facilities having service bays for vehicle service and repair, may have primary signs as shown on Vehicular Service Station Signage Chart, this page:
- b. Motor Fuel Sales as Secondary Use: Any business selling motor fuel to the public as a secondary use may have:
- (1) One permanently mounted fuel price sign. Such sign shall not exceed 10 ft. in height and 15 sq. ft. in area for each face with a maximum of 2 faces. Such sign may be incorporated with the monument sign allowed the primary use; however, in no instance may the fuel price sign itself exceed 10 ft. in height and 15 sq. ft. in area for each face with a maximum of 2 faces.
 - (2) One canopy logo sign per street frontage providing direct vehicular entrance to the fuel station.
- c. Movable fuel price signs are not allowed.
- d. Applicability: Signage required by state and/or federal laws and/or regulations concerning pump inspections, safety warnings, or other mandated materials are exempt from the provisions of this section.

7. VEHICULAR SERVICE STATION SIGNAGE CHART

Class	Sign Type	Maximum Number	Maximum Sign Area	Maximum Sign Height	Location	Lighting ¹
Station Identification and Pricing ²	Integrated with Monument sign subject to standards in 13.B.	One per street frontage ³	50 sq. ft. per face, two faces maximum.	10 ft..	At least 2 ft. from any property line.	Allowed.
Station Identification and Pricing - Option if located along Dallas Road	Freestanding	One, in addition to one monument sign which does not have pricing information.	40 sq. ft. per face, two faces maximum	20 ft.	At least 2 ft. from any property line.	Allowed and may be internally illuminated.
Canopy Logo	Wall	One per street frontage, not to exceed a total of two.	12 sq. ft.	2 ft..	Shall be on the face of the canopy covering the pump island(s).	Allowed.
Car Wash	Wall or painted wall	One	15 sq. ft.	2 ft..	Shall be on the car wash structure.	Not allowed.
Accessory Retail or Restaurant	Wall	One	20 sq. ft. or 10% of the facade area, whichever is more.	3 ft..	Shall be above the primary entrance, or on the facade of the tenant space.	Allowed.
Convenience Store	Wall	One	20 sq. ft. or 10% of the facade area, whichever is more.	See other standards for Wall Signs; 13.B.2 and 13.B.3.		

Footnotes:

- 1. See sign illumination provisions in Section 12.C.3.
- 2. The sign(s) may include the identification of the service station and fuel prices. No other price signs are allowed.
- 3. Only one pricing sign integrated with the monument sign allowed.

8. SIGNAGE STANDARDS: SCHOOL SITES

- a. Each school campus may have no more than one monument sign or free-standing sign, and one wall sign for each street frontage. A monument sign shall not exceed 24 sq. ft. in area per face, shall be set back a minimum of 2 ft. from the property line, and shall not exceed 10 ft. in height. A wall sign shall not exceed 32 sq. ft. in area and shall not exceed 15 ft. in height. A free-standing sign shall not exceed 32 sq. ft in area per face, shall be set back a minimum of 4 ft. from the property line, and shall not exceed 16 feet in height. All school signs shall be designed in keeping with the character of the neighborhood and shall be constructed of durable materials. If the sign contains an electric reader board or is otherwise illuminated, all lighting shall be turned off between the hours of 10:00 p.m. and 7:00 a.m.

13.C SITE FURNISHINGS AND HARDSCAPE

1. INTRODUCTION

- a. Site furnishings are the man-made articles that are found in a District to service the needs of the public. The appearance and identity of Badger Mountain South will benefit from the unifying of site furnishings throughout the community, although consideration may be given to the selection of unique site furnishings to create distinct identities for each of the five residential neighborhoods. Careful attention to detail and quality will help people feel more comfortable and at home in all areas, whether it be in one of the commercial districts or within the shared Civic spaces. Whether it is a picnic table or a trash can, each functional component adds to the experience of Badger Mountain South.

2. GENERAL DESIGN STANDARDS AND PRINCIPLES (BMS-SD-SR, CMU, DR, AND BMS-CIVIC DISTRICTS)

- a. Five overriding principles guide the implementation of Badger Mountain South Site Furnishing and Hardscape Standards:
 - (1) Fitness with Site and Context - Site furnishings and hardscapes should fit harmoniously with the structures and outdoor spaces in each commercial development and strengthen the sense of place for employees, users and visitors. Fitness implies sensitivity to scale, materials, pattern, texture and form to achieve a balance between variety and unity.
 - (2) Functionality - Site furnishings and hardscapes must effectively meet the pragmatic needs of their users. They need to be designed for serviceability over time. In addition, site furnishings should be designed for flexibility and adaptability since user needs may vary and evolve over time.
 - (3) Economy - It is important that site furnishings are constructed and maintained over their life cycle in a cost effective manner.
 - (4) Quality - Strong design control is required to achieve a high quality environment and implement the intent of the Badger Mountain South Master Plan.
 - (5) Sustainability - The spirit of sustainability is embedded in the effective implementation of the proposed standards. Encouraging eco-friendly materials and technologies and reducing the consumption of energy and non-renewable resources will provide benefits for the natural environment and the quality of the Badger Mountain South built environment.

3. HARDSCAPE STANDARDS

- a. Concrete Finishes for all hardscape surfaces may include:
 - (1) Broom Finish - Medium broom finish, or matched to existing concrete in the area.
 - (2) Exposed Aggregate - If exposed aggregate is used, the aggregate surface shall provide a slip resistance, but not uneven that could cause a trip hazard. Small size aggregate, such as pea gravel – ½ inch or less - may be used.
 - (3) Colored concrete - Color concrete shall be integral to the concrete;
 - (4) Patterned Concrete - Raised pattern shall not be a trip hazard or maintenance issue.
- b. Pavers, if used, must comply with the following:
 - (1) All pavers shall be installed on an engineered sub-base such as concrete or cement stabilized sand in areas with occasional vehicular traffic.
 - (2) Clay pavers should be able to withstand vehicular traffic/ emergency vehicle traffic.
 - (3) Pavers manufactured from material such as limestone, granite, etc., may be used if the surface is can be textured to provide a slip resistant finish.



Bench

4. BENCH STANDARDS

- a. Benches shall be of commercial grade construction. Bench frames shall be ductile iron, concrete or steel.
- b. Seat and backs shall be low maintenance materials such as concrete, powder coated metal or recycled material designed for this purpose. Wood should be hardwood such as Ipe, Maple, and Mahogany. Seat and backs constructed out of recycled plastic materials should have a reinforcing spine and fasteners.
- c. Benches may be constructed as a piece of public art in which case materials appropriate to the artwork may be used.
- d. Placement of benches should not obstruct pedestrian or emergency vehicular traffic. Benches in turf or planter areas shall be placed on a reinforced concrete or paver area with a minimum clearance of 6 inches between edge of bench and edge of concrete.
- e. At accessible locations, access for wheelchairs should be provided along the front and side of bench per ADA standards.
- f. Benches should be anchored to pavement or use in ground installation. Solid concrete benches should not need to be anchored.
- g. Benches shall be maintained to be free of chipped, faded, peeling paint/ coating. Concrete benches shall be free of chips and cracks. Any chips, cracks, peeling coatings shall be repaired as per manufacturer's recommendations.
- h. Benches for specific areas: Each Neighborhood in Badger Mountain South may have a unique style of bench specific to that area. New benches shall match the existing style of the area once established.



Trash Receptacle

5. TABLE STANDARDS

- a. Tables for any outdoor areas shall meet the ADA Standards.
- b. Tables in Civic Districts:
 - (1) Tables shall be commercial grade material for low maintenance, ease of clean up, vandal resistance, and weather resistance.
 - (2) Placement of tables shall not obstruct pedestrian and emergency vehicles. Provide adequate space around table for seating and passage
 - (3) Tables shall be permanently anchored by either in-ground or surface mount system.
 - (4) Tables shall be placed on hardscape such as concrete, pavers, etc., wide enough for the table and circulation around the table and accessible by connection to sidewalks or other paving / circulation areas.
- c. Tables in Commercial Districts:
 - (1) Tables with chairs, fixed or movable, can be used for outdoor eating establishments. Tables and chairs shall be commercial grade material that can be maintained and cleaned efficiently.

6. TRASH RECEPTACLES

- a. Trash receptacles and recycling bins will be provided in every commercial and Civic District development.
- b. Trash receptacles should be placed with the trash container closest to the area highest in traffic.
- c. Locations in Civic Districts will be determined to facilitate servicing.
- d. Trash receptacles should be compatible with building or other site furnishings.
- e. Trash receptacles should be fire-proof, and should not allow water run into them or have drainage openings at their base.

7. TREE GRATES

- a. Shall be provided at base of street trees along arterial collector streets, except where frontage also includes a Trail Type, in BMS-SD, CMU, DR, and BMS-VMU Districts and shall be made from commercial grade metals. Tree grates may also be used in the BMS-NC District at street frontages along ground floor commercial uses.



Public Art

- b. Size - 5 ft. x 5 ft. minimum dimension
- c. Tree grate design shall reflect the neighborhood character in which it resides.

8. MISCELLANEOUS GUIDELINES

- a. Dog waste disposal bag dispensers shall be standardized and located at the major entrances as located by the City to each greenbelt, greenway and in areas designated as Dog Parks.
- b. Bike racks shall be constructed of durable materials.
- c. Bollards:
 - (1) Bollards are installed to provide controlled entrance to pedestrian only areas and to provide protection to equipment and buildings when in proximity to vehicular traffic.
 - (2) Bollards may be fixed or removable as required by the City of Richland Public Safety officials.
- d. Maintenance: Provide a readily available water supply for cleaning and maintenance of paved surfaces, site furnishings, trash receptacles, and other non-planted areas.

9. LIGHTING STANDARDS

- a. See Section 12.C.3 for Exterior Lighting

10. PUBLIC ART

- a. Public art located within Badger Mountain South is intended to give the community distinguishing character and display creativity, making it a unique place to live.
- b. Diversity in art style, scale, type, and creativity is highly encouraged.
- c. Location - public art in civic open space is allowed and encouraged (i.e. parks, trails, plazas, greenways, civic facilities, etc...)
- d. Artistic or creative improvements to all site features are encouraged.
- e. Art may provide function as well as aesthetics to the site or building to which it resides.
- f. Public art may be featured in roundabouts with other appropriate landscape materials.



Parking Lot

- 1. MATERIALS**
 - a. A parking and circulation area must be hard-surfaced and conform to any applicable City of Richland Development Standards. For purposes of this section, the term hard-surfaced may also include pavers, stones, bricks or other similar materials placed to support vehicle circulation, but that may also allow rain and other water to penetrate the surface (i.e., “grasscrete”).
- 2. ENTRANCES AND EXITS**
 - a. The Director of Public Works shall fix the location, width, and manner of approach of vehicular ingress and egress from a parking area. The Director of Public Works may require the property owner to alter ingress or egress as necessary to control traffic in the interest of public safety and general welfare.
- 3. COMBINED DRIVEWAY**
 - a. The owners of adjoining properties shall provide combined driveways wherever practical. In conjunction with approval of a development, the City may require a property owner to provide an access and circulation easement to an abutting owner where joint access is reasonable to serve future development.
- 4. INTERNAL WALKWAYS**
 - a. The property owner shall install internal walkways in each new development in the BMS-SD-SR, CMU, and DR Districts. In addition, schools in all land use districts shall install internal walkways in each new facility.
 - b. The property owner shall provide internal walkways around the building to the extent necessary to assure safe access to the building from parking areas, adjacent properties, and public sidewalks or street rights-of-way and to assure consistency with the requirements of the LUDR.
 - c. Internal walkways must be a minimum of 5 ft. wide, exclusive of parked car overhangs. Where necessary to ensure 5 ft. of unobstructed walkway, wheel stops are required.



Internal Walkways

- 5. SHARED USE OF PARKING**
 - a. General. The administrative official may approve shared use of parking facilities located on separate properties if:
 - (1) A convenient pedestrian connection between the properties exists; and
 - (2) The availability of parking for all affected properties is indicated by directional signs.
 - (3) Where the uses to be served by shared parking do not overlap their hours of operation, the property owner or owners shall provide parking stalls equal to the greater of the applicable individual parking requirements.
 - (4) Where the uses to be served by shared parking have overlapping hours of operation, the property owner or owners shall provide parking stalls equal to the total of the individual parking requirements. If the following criteria are met, that total is reduced by 10 percent:
 - i. The parking areas share a property line;
 - ii. A vehicular connection between the lots exists;
 - iii. A convenient, visible pedestrian connection between the lots exists;
 - iv. The availability of parking for all affected properties is indicated by directional signs.
 - b. Non-residential projects also review parking Sustainability Standards found in Section 12.D.
 - c. See Section 11.C.7 for Parking Lot Landscape requirements.

THIS PAGE INTENTIONALLY LEFT BLANK



GLOSSARY

14

The Glossary provides definitions of terms and phrases used in the LUDR that are technical or specialized, or that may not reflect common usage. If any definitions in this Section conflict with definitions in the City of Richland Municipal Code, these definitions shall govern for the purposes of the LUDR.

GLOSSARY

ANSI / ASHRAE / IESNA. [American National Standards Institute / American Society of Heating, Refrigerating, and Air-conditioning Engineers / Illuminating Engineering Society of North America.]
(3) National building, sustainable, and lighting standards used by designers and builders to create a quality safe built environment.

Accessory Office. An office that serves the principal use of a building or structure.

Accessory Unit / Structures. Any use and/or structure that is customarily part of and clearly incidental and secondary to the principal residence and does not change the character of the residential use. May contain a separate residential unit either contained wholly within a principal single-family residential structure, or attached to or above a garage (maximum floor area of 600 square feet). An accessory dwelling unit is not included in Maximum Density Limitations. An Accessory unit/building may also be used for Home Occupation uses as identified elsewhere in the LUDR and that meet the requirements of RMC 23.42.09. An accessory unit or structure with a maximum floor area of 600 sq. ft. is allowed for a winery use.

Accessory Storage Structures. A supplemental building designed for the storage of boats / RVs or to be used as a personal worksop; in all cases not for the commercial repair or maintenance of vehicles of any type. It may also include an Accessory Unit that meets the standards and definition for Accessory Units (LUDR 8.P). Only permitted in the BMS-NE District on lots .25 acre or larger and having a principal structure.

Adult Family Homes. A regular family abode in which a person or persons provides personal care, special care, room, and board to more than one but not more than six adults who are not related by blood or marriage to the person or persons providing the services.

Alcoholic Beverages Sales. The retail sale of beer, wine and /or spirits in sealed containers for off-site consumption, either as part of another retail use, or as a primary business activity.

Alley. A private way permanently reserved as a secondary means of access to abutting property.

Arterial Collector Street. Streets that serve to interconnect and support the principal arterial highway system. They link major commercial, residential, industrial and institutional areas. Arterial streets are typically spaced about one mile apart. Access control is the key feature of an arterial route.

Assisted Living / Nursing Home. State-licensed, multi-family, residential structure which provides supervision or assistance for persons with special needs including help with tasks such as bathing, dressing, and medication management; may also supply specialized nursing services.

ATM. An automated teller machine (computerized, self-service machine used by banking customers for financial transactions, including deposits, withdrawals and fund transfers, without face-to-face contact with financial institution personnel), located outdoors at a bank, or in another location. Does not include drive-up ATM's.

Axonometric Diagram. Illustration of the spatial form of a building or structure.

Badger Mountain South. Also referred to as BMS, is a master planned community within the boundaries as described in the Master Agreement and subject to the terms and conditions found within the Master Agreement.

Bank, Financial Services. Financial institutions including: banks

Appurtenant Structures. Structures such as garden sheds, covered patios, attached and detached pergolas used accessory to residential uses.

and trust companies, credit agencies, holding (but not primarily operating) companies, lending and thrift institutions, other investment companies, securities/commodity contract brokers and dealers, security and commodity exchanges, vehicle finance (equity) leasing agencies. Does not include check-cashing stores. (See also, "ATM")
Bar, Tavern. A business where alcoholic beverages are sold for on-site consumption, which are not part of a larger restaurant. Includes bars, taverns, pubs, and similar establishments where any food service is subordinate to the sale of alcoholic beverages. May also include beer brewing as part of a micro-brewery ("brew pub"), and other beverage tasting facilities.

Bed & Breakfast Inn (B&B). A one-family detached dwelling unit occupied by a resident owner/manager within which up to four rental bedrooms are made available for overnight accommodation; requires a City of Richland Special use permit.

~~Block Park. See Block Open Space.~~

~~**Block Open Space.** A type of shared community space that provides small-scale gathering and play space for residents in the nearby vicinity. Block Open Spaces to range in size from 5,000 square feet to less than 1 acre and are required to be distributed throughout each of the neighborhoods; also called Block Parks.~~

Building Type. A structure defined by the combination of configuration, form, and function.

Build-to-Line (BTL). A setback dimension, along which a building facade or percentage of building facade, must be placed.

Child Care Center. A premise licensed by the state of Washington and receiving more than twelve (12) children for care during all or part of a day or night; must meet RMC 23.42.080 requirements.

Child Care (Family Home). A residential premise, state-licensed for Family Home Child Care, to provide direct care, supervision and early learning opportunities for twelve or fewer children, in the home of the licensee where the licensee resides and is the primary provider; must meet RMC 23.42.080 requirements; may alternatively be licensed for adult daycare for periods less than 24 hours.

Civic Uses. A category that includes public uses and other private uses which focus on improving the quality of day-to-day community life by providing a location for assembly, discourse, worship, education, sustainability features, recreation, farmers' markets and community-oriented entertainment venues.

Civic / Community / Institutional Facilities. A Building Type that includes schools, public safety buildings, libraries, recreation and other public or private buildings of similar nature.

Clear Vision Triangle. A triangle with 2-sides of the triangle formed by the two intersecting ROW lines, extending 20 feet back from their point of intersection with the third side formed by drawing a line connecting the two points located 20 from the point of intersection.

Collector Street. Streets that provide both access and circulation within and between residential and commercial/industrial areas. Collectors differ from arterials in that they provide more of a citywide circulation function and do not require as extensive control of access (compared to arterials) and penetrate into residential neighborhoods.

Commercial. A term defining workplace, office and retail use

collectively.

Common Courtyard. A entry court, forecourt or courtyard shared by multiple residential units or commercial spaces.
Community Storage Facility. An area within the South Orchard Neighborhood that is intended to serve the entire BMS community for storage of vehicles, boats and recreational vehicles; may also include inside storage and an accessory caretaker unit.

Consistency Determination. A document, also known as the Badger Mountain South Master Agreement Consistency Recommendation (BMS-MACR), provided by the MPA to the City and to the applicant upon receipt and review of any development or building application in Badger Mountain South. The Consistency Determination may be either a Level 1 or Level 2 BMS-MACR. Level 1 BMS-MACR is issued for all applications except for final plat approval and issuance of Certificate of Occupancy. A Level 2 BMS-MACR is required prior to final plat approval or issuance of Certificate of Occupancy. The BMS-MACR ensures that the development and building submittals meet the Master Agreement and LUDR requirements.

Corner Element. A prominent architectural element, such as a tower, corner bay window (chamfered or round) or significant façade articulation, designed to accent the corner of a building and typically used to terminate a view or mark an important entrance.

Cottage Court. A Building Type consisting of free-standing Single-Family residences arranged around a common, shared courtyard. A shared common building may also be provided.

Courtyard Housing. A Building Type consisting of Multi-family residential units arranged around a central Court.

Day Care Center: Child or Adult. A state-licensed facility that provides non-medical care and supervision for adult clients or minor children for periods of less than 24 hours for any client. These facilities include the following, all of which are required to be licensed by the Washington State Department of Social Services.

Development. All divisions of land for whatever purpose, site plan, binding site plan and any other uses or activities as defined in RMC 23.06.270.

Director. The Community Development Director of the City of Richland, or his or her duly appointed representative.

District. The distinct areas within BMS to which specific land use and development regulations apply in order to achieve the intent and purpose of the LUDR and the Master Agreement.

Drive-through Window Service. A facility which by design allows the transfer or goods or services to those while still in a vehicle.

Duplex. A Building Type consisting of a single structure containing two dwelling units, neither of which is an accessory dwelling unit; also known as a Paired House.

Eating and Drinking Establishments. A retail business selling ready-to-eat food and or beverages for on or off premise consumption; may include sales of alcoholic beverages and provide entertainment. May include beer or other alcohol brewing and beverage tasting facilities.

Edge Type. The pedestrian and landscape elements within the

right-of-way. Includes the area between the property line and the curb line on either side of the street (drive lanes and parking).

Estate Lots. Lots ranging in size from ¼ to 1+ acre, located in the Neighborhood Edge District.

Façade. The vertical surface of a building, generally set facing a street ("front façade").

Farmer's Market. The temporary use of a site for indoor and/or outdoor sales of food and farm produce items, in compliance with the Washington State Farmer's Market Manual, and Washington State Department of Health Food Handler's requirements.

Floor Finish Level. (See Ground Floor Finish Level).

Frontage. A strip or extent of land abutting on a street or other public right-of-way.

Frontage Types. The building architectural element that resides between the public right-of-way and the private property affiliated with the building. Frontage Types combined with the public realm create the apparent streetscape. Frontage Types are listed in Section 9: Frontage Types.

Gallery. A roofed promenade extending along the façade of a building and supported by columns on the outer side.

Gambling Premises. An establishment, as permitted by state law, which includes, but is not limited to, any building, room, enclosure, vehicle or other place used or intended to be used for gambling activity and/or containing a gambling device for such purposes.

General Retail. Stores and shops intended to serve the City as destination retail, rather than convenience shopping. Examples of these stores and lines of merchandise include:

Art galleries; retail; art supplies, including framing services; books, magazines, and newspapers; camera and photographic supplies; clothing, shoes, and accessories; collectibles (cards, coins, comics stamps, etc.); drug stores and pharmacies; dry goods; fabric and sewing supplies; furniture and appliance stores; hobby materials; home and office electronics; jewelry; luggage and leather goods; musical instruments; parts; accessories; small wares; specialty grocery store; specialty shops; sporting goods and equipment; stationery; toys and games; variety stores; videos, DVD's, records, and CD's, including rental stores with no outside storage.

General Office. An office use that typically occupies an area of greater than 5,000 square feet and more than twenty (20) employees at a given location. Typical examples include: professional offices for architects, engineers, doctors, dentists, chiropractors, lawyers, accountants, veterinarians or similar professions.

General Retail. A retail use involving the sale of goods or merchandise to residents living in the community, many of whom will access the store by vehicle. A use in this category typically occupies an area between 5,000 and 30,000 square feet. Typical examples include: banks, bookstores larger than 5,000 sq. ft.; pharmacy; sporting goods stores, grocery store, and other stores selling similar goods.

General Services. A Service Use offering daily conveniences to residents living in the community. A use in this category typically occupies an area between 5,000 and 30,000 square feet. Typical

examples include: business support services, coin-operated laundry, salons, spas, and health clubs, medical services/doctors’ offices, movie theaters, video arcades, bowling, meeting facility; funeral home (except within the Mixed-Use Districts).

Greenbelt. A linear green open space adjacent to a street that consists of trails, trees, perennials, ornamental grasses, shrubs, and/or groundcover. Often includes a part of the community trail network.

Green Building Certification. Certification by a nationally recognized sustainable program (i.e. LEED , or Built-Green, Energy Star, etc.) demonstrating compliance with specific program requirements.

Ground Floor Ceiling Height. Height from finished floor to finished ceiling of primary rooms on the ground floor not including secondary rooms such as bathrooms, closets, utility rooms, and storage spaces.

Ground Floor Finish Level. Height difference between adjacent public walk and the ground floor. In the case of a loading dock frontage that serves as the public Right-of-Way, the Floor Finish Level is the height of the walk above the adjacent street.

Height. A limit to the vertical extent of a building that is measured in number of stories. Height limits do not apply to masts, belfries, clock towers, chimney flues, water tanks, elevator bulkheads, and similar structures, which may be of any height approved by the Director.

Home Occupation. An occupation or business activity conducted within a dwelling unit by a member or members of the family who occupy the dwelling, where the occupation or business activity is clearly incidental and secondary to the use of the dwelling for living purposes and the residential character of the dwelling is maintained; requires City of Richland application processed at time of business license application.

Hospitality/Lodging. A facility, typically a hotel or motel, with guest rooms, with or without kitchen facilities, rented to the general public for transient overnight stay. May also include ancillary uses related to the principal use including spas and other personal services, eating facilities, swimming pools, retail and similar. Also permitted in the NE District when operated and licensed as a Bed and Breakfast facility.

Landmark Structure. A monument, building or edifice that is easily recognizable due to unique physical features or site prominence and that adds to the identifying characteristics of an area.

Landscape Coverage. The extent to which the planted landscape area is covered with plant material.

Landscape Planter. Planted area of landscape materials lying between hard surfaces such as between the street and a trail or sidewalk, or within a plaza hardscape.

Lighting Plan. The Lighting Plan is a required element of submittal for all buildings, except low rise residential (under four stories), proposing four or more exterior fixtures. The Plan must include the following information:

1. Type and number of luminaire equipment (fixtures), including the “cut off characteristics”, indicating manufacturer and model number(s).
2. Lamp source type (bulb type, i.e. high pressure sodium), lumen output, and wattage.
3. Mounting height with distance noted to the nearest property line for each luminaire.

4. Types of timing devices used to control the hours set for illumination, as well as the proposed hours when each fixture will be operated.
5. Total Lumens for each fixture, and total square footage of areas to be illuminated. For projects that are in commercial zones, the lumens per net acre to be lit, need no exceed 25,000 lumens.
6. A Calculation Summary indicating food-candle levels on the lighting plan, noting the maximum, average and minimum, as well as the uniformity ratio of maximum to minimum, and average to minimum levels.
7. Lighting manufacturer-supplied specifications (“cut sheet”) that include photographs of the fixtures, indicating the certified “cut off characteristics” of the fixture.
8. Foot-candle distribution, plotting the light levels in foot-candles on the ground, at the designated mounting heights for the proposed fixtures. Maximum illuminance levels should be expressed in foot-candle measurements on a grid of the site showing foot-candle readings in every five or ten-foot square. The grid shall include light contributions from all sources (i.e. pole mounted, wall mounted, sign, and street lights.) Show foot-candle renderings five feet beyond the property lines.

Liner Building. A structure that conceals a larger building such as a parking garage, or surface parking lot that is designed for ground floor occupancy by commercial or office uses, with upper floors also configured for those uses, or for residential use.

Large-Scale Retail. A retail use involving the large scale sale of goods to residents living within the region. These uses are almost exclusively accessed by automobile and therefore additional consideration should be given to parking and traffic issues when developing this use. The goods or merchandise sold may be of the same type or a variety of types and typically occupy an area greater than 30,000 square feet.

Live/Work Unit. An integrated housing unit and working space, occupied and utilized by a single household in a structure that has been designed or structurally modified to accommodate joint residential occupancy and work activity, and which includes:

Complete kitchen space and sanitary facilities in compliance with the Building Code; and

At least one resident in each live/work unit shall maintain a valid business license, if required, for a business on the premises.

Uses prohibited in Live/work Units: The following uses and activities are prohibited within a Live-Work Unit:
(1) amusement and recreation uses;
(2) adult entertainment uses;
(3) pet stores, kennels, animal hospitals;
(4) gun and firearms sales;
(5) automotive service stations, and motor vehicle repair garages; and
(6) liquor sales.

Local Parks. A community space between one (1) to five (5) acres in size that is developed to serve a neighborhood for both structured and passive play areas and activities.

Local Streets. Streets that have the sole function of providing access to immediately adjacent land.

Lodging – Hotel. A facility (typically a hotel or motel) with guest rooms or suites, with or without kitchen facilities, rented to the general public for transient lodging. Hotels typically include a variety of services in addition to lodging; for example, restaurants, meeting facilities, personal services, etc. Also includes accessory guest facilities such as swimming pools, tennis courts, indoor

athletic facilities, accessory retail uses, etc.

Lot. A measured parcel of land having fixed boundaries and designated on a plot of survey. A lot may be divided by a street or Alley.

LUDR. The Badger Mountain South Land Use and Development Regulations included as Exhibit C in the Master Agreement.

Marquee Sign. A projecting sign structure over the entrance of a building and typically used for movie theaters or similar venues; may have two-faces and may also include lighting but not movable or flashing lights.

Master Agreement. The document entitled “Agreement Between the City of Richland and NorAm Investment LLC, regarding the Development of the Walkable and Sustainable Community known as Badger Mountain South” and approved by the City of Richland City Council on December 7, 2010, and adopted by City of Richland Resolution No. 77-10.

Master Plan Administrator (MPA). A professional appointed by NorAm Investment LLC, or its successor, as outlined in the Master Agreement, to review all applications for plats, subdivisions, site plans, and development permits in Badger Mountain South as part of the application submittal to the City of Richland. The MPA is responsible for ensuring the intent of the LUDR is met in all applications and will provide to the City and to the applicant a Consistency Recommendation (BMS-MACR) to be included in the materials reviewed by the City of Richland Development Services Department. The roles and responsibilities of the MPA are considered synonymous with the Master Agreement Administrator, MAA, as found in the Master Agreement.

Mansion Apartments. A Building Type that combines 3 to 6 residences with one structure designed to resemble a large Single-Family house in a typical residential neighborhood setting.

Mixed-Use Building. More than one type of use in a building or set of buildings. This may be a combination of residential, commercial, industrial, office, institutional, or other land uses.

Mixed-Use Development. A mixed-use development is a real estate project with planned integration of some combination of retail, office, residential, hotel, recreation or other functions. It is pedestrian-oriented and contains elements of a live-work-play environment. It maximizes space usage, has amenities and architectural expression and tends to mitigate traffic and sprawl.

Multi-family residential structure. A structure containing two or more dwelling units in which the units may or may not share a common wall with the adjacent (horizontally or vertically) unit(s) or have individual entrances from the outside.. Multi-family Building Types include: Paired Housing (Duplex); Live/Work; Stacked Units (Apartment); Row House; Courtyard Housing; Mansion Apartment (3 to 6 units); and Mixed-Use buildings which contain dwelling units above or behind commercial space within the same building.

Natural Grade. The site topography which exists at the time a lot is sold to the first owner by the project developer or builder; fill material subsequently brought to a site does not modify this original grade.

Neighborhood Goods and Service Buildings. A Building Type that includes stand alone structures, 30,000 SF or smaller that contain uses that support the needs of the neighborhoods in which they are located. Typical examples include pharmacies, daycare centers, churches, medical clinics and other office buildings.

Neighborhood Office. An Office Use that typically occupies an area of 5,000 square feet or less and involves twenty (20) or fewer employees at a given location. Typical examples include: professional offices including accountants, doctors, lawyers, engineers or other similar professions, or small-scale business services.

Neighborhood Personal Services. A Service Use that offers daily conveniences to residents in adjacent neighborhoods. A use in this category typically occupies an area of less than 5,000 square feet. Typical examples include: spa, cleaning and garment services, beauty and barber shops, shoe repair, travel agencies, finance, real estate and insurance; and health and educational services.

Neighborhood Retail. An establishment engaged in selling new goods or services to the general public and rendering services incidental to the sales of such goods. A use in this category typically occupies an area of less than 5,000 square feet. Typical examples include: ATM (automatic teller machine); art galleries; specialty shops; variety stores; coffee shop, food markets and convenience stores; pet stores and grooming with no boarding; artisan or crafts sales, assembly or fabrication; photography studios; dance, music, and martial arts studios, excluding any type of adult business.

Neighborhood Sector. Geographical boundaries based on the proposed street network intended to assist with the distribution of residential density, housing mix and ~~Block~~ Open Space.

Neighborhood Storage Area. An area up to one acre in size designated by the master developer as the area for storage of recreational vehicles, boats, and cars for the purpose of providing storage for an individual neighborhood.

Night Club. A facility serving alcoholic beverages for on-site consumption, and providing entertainment, examples of which include live music and /or dancing, comedy, etc. Does not include adult oriented businesses.

Office. Business, Service and Professional, Administrative.

Paired House. See Duplex.

Park, Playground. An outdoor recreation facility that may provide a variety of recreational opportunities including playground equipment, open space areas for passive recreation and picnicking, and sport and active recreation facilities; may be developed as a private or public facility.

Parking Facility, Public or Commercial. Parking lots or structures operated by the City, or a private entity, providing parking for a fee. Does not include towing, impound and storage facilities.

Parking lots. A paved area designated for the parking of motor vehicles.

Pedestrian Street. See Primary Street.

Place of worship. A permanently located structure or group of structures which is utilized for the purposes of conducting religious worship, services or ceremonies. May also contain ancillary uses including graded educational facilities, day care facilities or multi-purpose facilities. For the purposes of this code, Places of Worship are included in the Neighborhood Goods and Services Building Type.

Primary Street. Streets designated within the Village Mixed-Use Districts where vehicular access points are restricted and active

retail, commercial and office Storefront Frontages are required. Also called Pedestrian Street. In all other Districts, primary streets are designated along building frontages, i.e. front street.

Public Facilities. Any building or use often supplied by a governmental organization. Typical examples include: schools; water, power and sewer facilities; fire and police substations. May include ambulance; libraries; farmers markets; transit centers and bus stops; business incubator buildings; outdoor amphitheater; and similar uses. Private schools, not owned by a governmental organization are included in this use category.

Public Safety Facility. A facility operated by a public agency including fire stations, other fire preventive and fire fighting facilities, police and sheriff substations and headquarters, including interim incarceration facilities. May include ambulance dispatch on the same site.

Reader Board. A sign or part of a sign on which the letters are readily replaceable such that the copy can be changed from time to time at will.

Recreation and Cultural Facilities, Public and Private. Any building or use intended for passive or physical recreational activities or activities that advance the arts, and related accessory structures. Typical examples include: trails; playgrounds and play equipment; health clubs and gyms; swimming pools; public restroom facilities; plazas; gardens; picnic shelters; water spray park; sports fields and courts; dog parks; outdoor amphitheater; skate park; fountains and other water features; facility parking; maintenance buildings only as ancillary structures to the park located in, and similar uses.

Regulating Plan. A plan of the proposed community which identifies the boundaries where different rules of Development apply.

Residential. Premises used primarily for human habitation. Units shall not be less than 440 square feet in net area.

Restaurant, Café, Coffee Shop. A retail business selling ready-to-eat food and/or beverages for on- or off-premise consumption. These include eating establishments where customers are served from a walk-up ordering counter for either on- or off-premise consumption ("counter service"); and establishments where customers are served food at their tables for on-premise consumption ("table service"), that may also provide food for take-out, but does not include drive-through services, which are separately defined and regulated.

Row House. A Building Type consisting of townhouse (multi-level) units arranged side by side in a zero lot line configuration. Residential units in Row Houses have individual entrances along a Frontage.

Secondary Street. Streets designated within the Village Mixed-Use Districts where vehicular access points and ground floor residential units are allowed. In all other Districts, secondary streets are designated along building side yards, i.e. side street.

Senior Housing. Multi-family residential structures that are designed as independent living accommodations for those 55 years of age or older; may include congregate dining.

Service Street. A paved vehicular thoroughfare which provides access to delivery trucks and other service vehicles; shall be accessed from a Secondary (side) Street.

Setback. The mandatory distance between a property line and a

building or appurtenance.

Shared Parking. Any parking spaces assigned to more than one use, where persons utilizing the spaces are unlikely to need the spaces at the same time of day.

Side Yard Driveway Condition. For Single-family Houses with Street Access, a drive lane up to 10 ft. in width that runs parallel to the side ywar setback and extends not less than 30 ft from the front property line when the garage is located in the lot rear. When the garage is part of the front facade, driveway access is provided to teh garage in a side yard driveway. In both conditions, the driveway may widen to 20 ft., and may encroach into the side yard setback, to provide access to the garage.

Single-Family Residential Structure. One primary residence per lot; may include one Accessory Unit.

Solar (or Photovoltaic) Collectors or Array. A linked collection of photovoltaic modules, which are in turn made of multiple interconnected solar cells. By their modularity, they are able to be configured to supply most loads. When placed in the BMS-NC, BMS-NE or BMS-NG Districts, a Solar Collector may be roof mounted when it does not extend above the roof peak nor extend above the roof surface more than 24” measured perpendicular to the roof, or it may be ground-mounted when installed in side or rear yards only and screened from public streets.

Special Districts. An area that, by its intrinsic function, disposition or configuration, should not conform to the District standards established for the proposed community.

Special Events. Activities of limited duration including concerts, tournaments, festivals and similar public gatherings.

Stacked Unit Building. A Building Type, commonly known as an apartment, that is a Multi-family, residential only, structure consisting of a number of dwelling units arranged side by side and stacked on multiple floors.

Storage. A building or facility that is designed to leave or place materials or other items in.

Storage, Outdoor. The storage of various materials outside of a structure.

Storefront. The portion of a frontage that is composed of the display window and/or entrance and its components including windows, doors, transoms and still pane that is inserted into various Frontage Types, such as a Storefront, Arcade or Gallery, to accommodate retail.

Story. A habitable floor level within a building, typically 8 ft. to 14 ft. high from floor to ceiling. A half story is a conditional space that rests primarily underneath the slope of the roof, usually having dormer windows and occupying about half the area of the floor or floors below. Individual spaces, such as lobbies and foyers may exceed one story in height. The number of stories are measured from the sidewalk of the primary street.

Street Frontage Landscape. Landscaping in the public right-of-way along streets and medians.

Sustainability Plan. A document submitted with an initial commercial entitlement application which identifies the means and methods to address Sustainability Principles, as found in Section 12.B. The Plan will specify each principle, determine applicability, and identify actions to address each relevant item.

Tandem Parking. One (1) car parked behind another where aisles are not provided. A maximum of two cars are allowed in tandem configuration for individual residential units only. Tandem parking may be located in a garage or as surface parking.

Telecommunication Facility. A use of land that includes buildings, cabinets, structures, and facilities, including generating and switching stations, repeaters, antennas, transmitters, receivers, towers, and all other buildings and structures relating to low power mobile voice transmission, data transmission, video transmission and radio transmission, or wireless transmission.

Temporary Uses. A use of limited duration including: Christmas tree sales in any district for a period not to exceed 60 days; Contractors office and equipment sheds containing no sleeping or cooking accommodations accessory to a construction project and to continue only during the duration of such project; Promotional activities of retail merchants involving the display of goods and merchandise may be conducted outside of enclosed buildings or for a period of not more than six consecutive weeks in any six month period. Retail business may display only merchandise that is for sale within the building in the area immediately adjacent to the building. These provisions shall in no way be deemed to authorize the outdoor display of or sale of salvage material or similar display or sale in any district.

Unclassified Uses. Uses not listed in 2.C. Land Use Table and which do not meet the criteria for similar and compatible uses specified in 1.G.3.

Urban Form Standards. Establish the specific physical and use parameters for each District including; building placement, building profile and Type, Frontages and parking.

Usable Lawn. The minimum lawn area that is allowed in the Badger Mountain South community is an area 10 ft. minimum in any direction.

Use Table - 2.C Land Use Table. A matrix which identifies broad categories of land uses that are permitted in each BMS District. The land uses listed in the Use Table are further expanded with examples in Section 14- Glossary.

Upper Floor Ceiling Height. Height from finished floor to finished ceiling of primary rooms on the upper floors not including secondary rooms such as bathrooms, closets, utility rooms, and storage spaces.

Vehicular Services. A business involving the servicing of vehicles and/or the storage and distribution of gasoline. Incidental uses may include a convenience store, the sale of propane and kerosene, automotive repair, car wash, and tire sales.

Vending Carts. Portable retail and food concessions, usually with wheels, including sales of coffee, flowers, ice cream, hot dogs, other food items and similar.

Vineyards. A plantation of grape-bearing vines, grown mainly for wine making, but also raisins, table grapes, and non-alcoholic grape juice. Vineyards for personal uses in residential districts are permitted as landscape; when planted in commercial districts vineyards must be part of an overall landscape plan that is reviewed by the MPA.

~~**Wing Fence.** A fence that extends perpendicular from the side of the house to the side yard fencing between lots.~~



~~GLOSSARY~~
APPENDIX 15

~~14~~

The Glossary provides definitions of terms and phrases used in the LUDR that are technical or specialized, or that may not reflect common usage. If any definitions in this Section conflict with definitions in the City of Richland Municipal Code, these definitions shall govern for the purposes of the LUDR.

DECIDUOUS TREES AND EVERGREEN TREES - SEE SECTION 11

reposition text for proper alignment

SHRUBS

Botanical Name	Common Name	Ht. X Sp.	Min. Size	Sun / Shade	Special Features
<i>Amelanchier alnifolia</i>	Serviceberry	10-12' X 20'	30-36" ht./sp.	Sun/Pt. Shade	* N
<i>Aronia arbutifolia</i>	Red Chokeberry	6-8'	30-36" ht./sp.	Sun/Pt. Shade	*
<i>Artemisia tridentata</i>	Big Sagebrush	4-15' X 3-10'	30-36" ht.	Sun	* N
<i>Artemisia tripartita</i>	Three-Tip Sage	Varies	30-36" ht.	Sun	N
<i>Atriplex canescens</i>	Four-wing Saltbush	3-6' X 4-8'	18-24" ht.	Sun	* N
<i>Berberis hematocarpa</i>	Red Barberry	3-6'	18-24" ht.	Sun/Pt. Shade	*
<i>Berberis t.</i> 'Crimson Pygmy'	Crimson Pygmy Japanese Barberry	1' X 3'	12-18" ht.	Sun	*
<i>Berberis thunbergii</i>	Japanese Barberry	4-6' X 4-6'	18-24" ht.	Sun	*
<i>Caragana arborescens</i>	Siberian Pea Shrub	15' X 20'	30-36" ht./sp.	Sun	*
<i>Caragana frutex</i>	Russian Pea Shrub	10' X 8'	30-36" ht./sp.	Sun	*
<i>Caryopteris x clandonensis</i>	Blue Mist	2' X 2'	12-18" ht.	Sun	*
<i>Ceratoides lanata</i>	Winter Fat	1-3' X 1-3'	12-18" ht.	Sun	*
<i>Cercocarpus ledifolius</i>	Curl-Leaf Moutain Mahogany	5-12' X 5-12'	30-36" ht.	Sun	*
<i>Chamaebatiera millifolium</i>	Fernbush	6-8' X 6-8'	24-30" ht.	Sun	*
<i>Chrysothamnus viscidiflorus</i>	Green Rabbitbrush	6' X 3'	18-24" ht.	Sun	* N
<i>Chrysothamnus nauseaus</i>	Rabbitbrush	6' X 3'	18-24" ht.	Sun	*

SHRUBS continued

Botanical Name	Common Name	Ht. X Sp.	Min. Size	Sun/Shade	Special Features
<i>Cornus stolonifera</i>	Redtwig Dogwood	7-9' X 12'	24-30" ht./sp.	Sun or Shade	N
<i>Corylus cornuta californica</i>	Western Hazelnut	5-12' X 5-12'	30-36" ht./sp.	Sun/Pt. Shade	N
<i>Cotinus coggyria</i>	Smoke Tree	12-15' X 12-15'	30-36" ht./sp.	Sun	*
<i>Cotoneaster acutifolius</i>	Peking Cotoneaster	6-10' X 6-10'	30-36" ht./sp.	Sun	*
<i>Cotoneaster adpressus</i>	Cotoneaster	1' X 6'	12-18" sp.	Sun/Pt. Shade	*
<i>Cotoneaster apiculatus</i>	Cranberry Cotoneaster	3' X 6'	18-24" ht./sp.	Sun	*
<i>Cotoneaster divaricatus</i>	Spreading Cotoneaster	6' X 6'	24-30" ht./sp.	Sun	*
<i>Cotoneaster horizontalis</i>	Rock Cotoneaster	2-3' X 15'	12-18" sp.	Sun/Pt. Shade	*
<i>Ephedra viridis</i>	Mormon Tea	3-4' X 3-4'	12-18" ht./sp.	Sun	*
<i>Eriogonum niveum</i>	Snow Buckwheat	1-2' X 1-2'	12-18" sp.	Sun	N
<i>Eriogonum sphaerocephalum</i>	Rock Buckwheat	1-2' X 1-2'	12-18" sp.	Sun	N
<i>Falugia paradoxa</i>	Apache Plume	4-6' X 5'	24-30" ht./sp.	Sun	*
<i>Forestiera neomexicana</i>	New Mexican Privet	12-18' X 12'	30-36" ht./sp.	Sun/Pt. Shade	*
<i>Genista tinctoria</i>	Woadwaxen	6' X 6'	30-36" ht./sp.	Sun	*
<i>Hippophae rhamnoides</i>	Sea Buckthorn	8-10' X 8-10'	30-36" ht./sp.	Sun	*
<i>Holodiscus discolor</i>	Ocean Spray	3' X 4'	24-30" ht./sp.	Part Shade	*
<i>Juniperus horizontalis</i>	Creeping Juniper	1' X 8-10'	12-18" sp.	Sun/Pt. Shade	*
<i>Kolkwitzia amabilis</i>	Beauty Bush	10-12' X 10-12'	30-36" ht./sp.	Sun/Pt. Shade	*
<i>Lavendula sp.</i>	Lavender	2' X 2'	12-18" ht./sp.	Sun	*
<i>Ligustrum vulgare</i>	Common Privet	15' X 12'	30-36" ht./sp.	Sun/Pt. Shade	*
<i>Lindera benzoin</i>	Spicebush	6-12' X 6-12'	30-36" ht./sp.	Sun	*
<i>Lonicera maachii</i>	Amur Honeysuckle	10-15'	30-36" ht./sp.	Sun/Pt. Shade	*
<i>Mahonia repens</i>	Creeping Mahonia	1' X 3'	12-18" sp.	Sun/Pt. Shade	*
<i>Microbiota decussata</i>	Siberian Carpet Cypress	1' X 7-8'	12-18" sp.	Sun or Shade	*
<i>Myrica pensylvanica</i>	Bayberry	9' X 5-12'	30-36" ht./sp.	Sun/Pt. Shade	*
<i>Philadelphus lewisii</i>	Mock Orange	5-10' X 5-12'	30-36" ht./sp.	Lt. Shade	N
<i>Philadelphus microphyllus</i>	Littleleaf Mock Orange	4-5' X 4-5'	24-30" ht.	Sun/Pt. Shade	* N
<i>Physocarpus opulifolius</i>	Common Ninebark	9' X 10'	30-36" ht.	Sun/Pt. Shade	*
<i>Pinus mugo mugo</i>	Mugo Pine	2-6' X 12'	18-24" ht./sp.	Sun/Pt. Shade	*
<i>Potentilla fruticosa</i>	Cinquefoil	1-4' X 2-4'	12-18" ht./sp.	Sun/Pt. Shade	*
<i>Prunus besseyi</i>	Hanson's Bush Cherry	4-6' X 4-6'	24-30" ht.	Sun	*
<i>Rhamnus frangula</i>	Alder Buckthorn	10-12' X 10-12'	30-36" ht./sp.	Sun	*
<i>Rhus aromatica 'Gro-Low'</i>	Gro-Low Sumac	2-3' X 6-8'	12-18" sp.	Sun/Pt. Shade	*
<i>Rhus glabra</i>	Smooth Sumac	10-20'	30-36" ht./sp.	Sun	* N
<i>Rhus typhina</i>	Staghorn Sumac	15' X 15'	30-36" ht./sp.	Sun/Pt. Shade	*
<i>Ribes aureum</i>	Golden Currant	3-6' X 3-6'	24-30" ht.	Part Shade	* N
<i>Rosa nutkana</i>	Nootka Rose	6' X 4'	24-30" ht.	Sun/Pt. Shade	*
<i>Rosa rubrifolia</i>	Redleaf Rose	6' X 5'	24-30" ht.	Sun/Pt. Shade	*
<i>Rosa rugosa</i>	Rugosa Rose	3-6' X 3-6'	24-30" ht.	Sun	*
<i>Rubus deliciosus</i>	Thimbleberry	3-5' X 6'	24-30" ht./sp.	Sun/Pt. Shade	*
<i>Salvia dorrii</i>	Desert Sage	1-3' X 2-4'	12-18" ht.	Sun	N
<i>Sambucus cerulea</i>	Blue Elderberry	10-15' X 10'	30-36" ht./sp.	Sun/Pt. Shade	N
<i>Sambucus nigra</i>	Black Elder	Varies	24-30" ht.	Sun/Pt. Shade	N
<i>Spiraea x vanhouttei</i>	Vanhoutte Spirea	6' X 8'	30-36" ht./sp.	Sun/Pt. Shade	*
<i>Symphoricarpos albus</i>	Common Snowberry	2-6' X 2-6'	12-18" ht.	Sun/Pt. Shade	N
<i>Symphoricarpos x chenaultii</i>	Chenault Coralberry	2-6' X 2-6'	12-18" ht.	Sun/Pt. Shade	*

~~11.F~~ DROUGHT TOLERANT AND/OR NATIVE/NATURALIZED PLANT LIST continued

SHRUBS continued

Botanical Name	Common Name	Ht. X Sp.	Min. Size	Sun/Shade	Special Features
<i>Syringa vulgaris</i>	Common Lilac	8-20' X 6-15'	30-36" ht./sp.	Sun	*
<i>Taxus cuspidata</i>	Japanese Yew	10-25' X 5-12'	24-30" ht.	Sun/Pt. Shade	*
<i>Viburnum lantana</i>	Wayfaring Tree	10-20' X 10-20'	30-36" ht.	Sun/Pt. Shade	*
<i>Viburnum trilobum</i>	Cranberry Bush	10' X 8	30-36" ht.	Sun/Pt. Shade	*
<i>Yucca sp.</i>	Yucca	1-7' X 1-4'	18-24" ht.	Sun	*

BUNCHGRASSES

NOTE: Min. size 4" pots, typ. Upon approval from Master Landscape Architect, plugs or seed may be used.

Botanical Name	Common Name	Ht. X Sp.	Min. Size	Sun/Shade	Special Features
<i>Achnatherum hymenoides</i>	Indian Ricegrass	12-24"	4" pots	Sun	N
<i>Elymus elymoides</i>	Squirreltail	12-24"	4" pots	Sun	N
<i>Festuca idahoensis</i>	Idaho Fescue	12-24"	4" pots	Sun/Pt. Shade	N
<i>Hesperostipa comata</i>	Needle & Thread Grass	24-36"	4" pots	Sun	N
<i>Leymus cinereus</i>	Basin Wildrye	4-6'	4" pots	Sun	N
<i>Poa secunda</i>	Sandberg's Bluegrass	8-12"	4" pots	Sun	N
<i>Pseudoroegneria spicata</i>	Bluebunch Wheatgrass	12-36"	4" pots	Sun	N
<i>Sporobolus cryptandrus</i>	Sand Dropseed	12-24"	4" pots	Sun	N

GROUNDCOVERS

Botanical Name	Common Name	Ht. X Sp.	Min. Size	Sun/Shade	Special Features
<i>Aegopodium variegatum</i>	Bishop's Weed	6" X 12'	4" pots	Sun/Pt. Shade	*
<i>Archostaphylos uva-ursi</i>	Kinnikinnick	3-6' X 2-3'	4" pots	Sun/Pt. Shade	* N
<i>Campsis radicans</i>	Trumpet Creeper	6" X 40'	4" pots	Sun/Pt. Shade	*
<i>Cerastium tomentosum</i>	Snow-In-Summer	6-8" X 15'	4" pots	Lt. Shade	*
<i>Delosperma cooperi</i>	Purple Hardy Ice Plant	3" X 24"	4" pots	Lt. Shade	*
<i>Delosperma nubigenum</i>	Yellow Hardy Ice Plant	1" X 36"	4" pots	Lt. Shade	*
<i>Galium odoratum</i>	Sweet Woodruff	3" X 12'	4" pots	Shade	*
<i>Helianthemum nummularium</i>	Sunrose	6-8" X 36"	4" pots	Sun	*
<i>Mahonia repens</i>	Creeping Mahonia	12" X 36"	4" pots	Sun/Pt. Shade	*
<i>Marrubium rotundifolia</i>	Silver Edged Horehound	10" X 18"	4" pots	Sun	*
<i>Ruschia pulvinaris</i>	Creeping Shrubby Ice Plant	3" X 14"	4" pots	Sun	*
<i>Sedum spurium</i>	Two-Row Stonecrop	3-6" X 12-24"	4" pots	Sun	*
<i>Thymus serpyllum</i>	Creeping Thyme	3" X 36"	4" pots	Lt. Shade	*
<i>Thymus serpyllum</i> 'Reiter'	Reiter Creeping Thyme	3" X 36"	4" pots	Lt. Shade	*
<i>Thymus pseudolanuginosus</i>	Woolly Thyme	2-3" X 36"	4" pots	Lt. Shade	*
<i>Veronica oltensis</i>	Thyme-Leaf Speedwell	1" X 24"	4" pots	Sun	*
<i>Veronica pectinata</i>	Blue Woolly Speedwell	ground hugging	4" pots	Sun/Pt. Shade	*
<i>Vinca major</i>	Periwinkle	8" X 36"	4" pots	Sun/Pt. Shade	*

PERENNIALS

NOTE: Min. size 4" pots, typ. Upon approval from the BMS-MPA, plugs or seed may be used.

Botanical Name	Common Name	Ht. X Sp.	Min. Size	Sun /Shade	Special Features
<i>Achillea ageratifolia</i>	Greek Yarrow	4-10"	4" pots	Sun	*
<i>Achillea f. 'Moonshine'</i>	Moonshine Yarrow	24"	4" pots	Sun	*
<i>Achillea millefolium</i>	Common Yarrow	36"	4" pots	Sun	* N
<i>Adenophora liliifolia</i>	Lady Bells	18" X 12"	4" pots	Sun/Pt. Shade	*
<i>Agastache sp.</i>	Hyssop	18-30" X 18"	4" pots	Sun/Pt. Shade	*
<i>Agastache canna</i>	Wild Hyssop	24-36" X 18"	4" pots	Sun/Pt. Shade	*
<i>Alchemilla molis</i>	Lady's Mantle	12-18" X 12-15"	4" pots	Sun/Pt. Shade	*
<i>Allium sphaerocephalum</i>	Round-Headed Garlic	24" X 36"	4" pots	Sun/Pt. Shade	N
<i>Anaphalis margaritacea</i>	Pearly Everlasting	20" X 20"	4" pots	Sun	*
<i>Antennaria dioica</i> 'Rosea'	Pink Pussytoes	4-12" X 8-12"	4" pots	Sun	*
<i>Anthemis tinctoria</i>	Golden Marguerite	24-36" X 24-36"	4" pots	Sun	*
<i>Arabis caucasica</i>	Wall Rockcress	6" X 18"	4" pots	Sun	*
<i>Artemisia abrotantum</i>	Southernwood	36" X 36"	4" pots	Sun	*
<i>Artemisia 'Powis Castle'</i>	Silver Sage	36" X 36"	4" pots	Sun	*
<i>Artemisia rigida</i>	Stiff Sage	Varies	4" pots	Sun	N
<i>Artemisia stellerana</i>	Dusty Miller	30" X 36"	4" pots	Sun	*
<i>Asclepias tuberosa</i>	Butterfly Weed	36" X 12"	4" pots	Sun	*
<i>Aster tataricus</i>	Tatarian Aster	5-7' X 3'	4" pots	Sun/Pt. Shade	*
<i>Atriplex confertifolia</i>	Shadscale	1-3' X 1-3'	4" pots	Sun	N
<i>Aurinia saxatilis</i>	Basket-Of-Gold	12-18" X 12-15"	4" pots	Sun/Pt. Shade	*
<i>Balsamorhiza careyana</i>	Carey's Balsamroot	Varies	4" pots	Sun	N
<i>Balsamorhiza sagittata</i>	Arrowleaf Balsamroot	Varies	4" pots	Sun	N
<i>Baptisia australis</i>	Blue False Indigo	3-6' X 4'	4" pots	Sun	*
<i>Bergenia cordifolia</i>	Heartleaf Bergenia	18" X 12"	4" pots	Shade	*
<i>Berlandiera lyrata</i>	Chocolate Flower	18-36" X 18-36"	4" pots	Sun	*
<i>Brunnera macrophylla</i>	Brunnera	18" X 24"	4" pots	Sun/Pt. Shade	*
<i>Calamintha grandiflora</i>	Calamint	24" X 24"	4" pots	Sun/Pt. Shade	*
<i>Callirhoe involucrata</i>	Poppy Mallow	6" X 24-36"	4" pots	Sun/Pt. Shade	*
<i>Calylophus hartwegii</i>	Sundrops	12" X 24"	4" pots	Sun/Pt. Shade	*
<i>Calylophus serrulatus</i>	Dwarf Snowdrops	18" X 18"	4" pots	Sun/Pt. Shade	*
<i>Campanula rotundifolia</i>	Bellflower	12-24"	4" pots	Sun/Pt. Shade	*
<i>Catananche caerulea</i>	Cupid's Dart	12" X 12"	4" pots	Sun	*
<i>Centranthus ruber</i>	Red Valerian	36" X 36"	4" pots	Sun/Pt. Shade	*
<i>Coreopsis grandiflora</i>	Sunray	12-24" X 36"	4" pots	Sun	*
<i>Coreopsis verticillata</i> 'Moonbeam'	Moonbeam Coreopsis	18-24"	4" pots	Sun	*
<i>Coronilla varia</i>	Crown Vetch	18-24" X 48"	4" pots	Sun	*
<i>Dianthus barbatus</i>	Sweet William	20" X 12"	4" pots	Lt. Shade	*
<i>Dianthus plumarius</i>	Cottage Pink	10-18" X 20"	4" pots	Lt. Shade	*
<i>Echinacea purpurea`</i>	Purple Coneflower	24-48"	4" pots	Sun	*
<i>Epimedium alpinum</i>	Alpine Epimedium	6-9"	4" pots	Sun/Pt. Shade	*
<i>Erigeron speciosus</i>	Fleabane	24" X 24"	4" pots	Sun/Pt. Shade	*
<i>Eriogonum umbellatum</i>	Sulfur Flower	6-12" X 12-24"	4" pots	Sun	*
<i>Eryngium bourgatii</i>	Sea Holly	24"	4" pots	Sun	*

~~11.F~~ DROUGHT TOLERANT AND/OR NATIVE/NATURALIZED PLANT LIST continued

PERENNIALS continued

NOTE: Min. size 4" pots, typ. Upon approval from the BMS-MPA, plugs or seed may be used.

Botanical Name	Common Name	Ht. X Sp.	Min. Size	Sun / Shade	Special Features
<i>Erysimum cheiri</i>	English Wallflower	12-30" X 12-18"	4" pots	Sun/Pt. Shade	*
<i>Euphorbia polychroma</i>	Cushion Spurge	18" X 24"	4" pots	Sun/Pt. Shade	*
<i>Filipendula vulgaris</i>	Dropwort	24-36"	4" pots	Sun	*
<i>Gaillardia aristata</i>	Blanket Flower	24-30" X 24"	4" pots	Sun	*
<i>Gaillardia x grandiflora</i> 'Goblin'	Goblin Blanket Flower	12" X 18"	4" pots	Sun	*
<i>Geranium sanguineum</i>	Bloody Cranesbill	8-18" X 24-30"	4" pots	Sun/Pt. Shade	*
<i>Grayia spinosa</i>	Hopsage	Varies	4" pots	Sun	N
<i>Helianthus maximiliani</i>	Sunflower	10' X 3'	4" pots	Sun	*
<i>Hemerocallis sp.</i>	Daylily	Varies	4" pots	Sun	*
<i>Hesperaloe parviflora</i>	Red Yucca	3-4' X 3-4'	4" pots	Sun/Pt. Shade	*
<i>Heuchera sanguinea</i>	Coral Bells	12-18" X 12-15"	4" pots	Sun/Pt. Shade	*
<i>Hyssopus officinalis</i>	Hyssop	18-24" X 36"	4" pots	Sun/Pt. Shade	*
<i>Kniphofia uvaria</i>	Red-Hot Poker	2-4'	4" pots	Sun	*
<i>Lamium maculatum</i>	Dead Nettle	8" X 36"	4" pots	Shade	*
<i>Lewisia rediviva</i>	Bitterroot	2" X 4"	4" pots	Sun/Pt. Shade	*
<i>Liatris spicata</i>	Gayfeather	4' X 2'	4" pots	Sun	*
<i>Limonium platyphyllum</i>	Statice	30" X 36"	4" pots	Sun	*
<i>Linum perenne</i>	Perennial Blue Flax	24" X 18"	4" pots	Sun	*
<i>Liriope spicata</i>	Creeping Lily Turf	8-10" X 18"	4" pots	Shade	*
<i>Lobularia maritima</i>	Sweet Alyssum	Varies	4" pots	Sun/Pt. Shade	*
<i>Lupinus leucophyllus</i>	Velvet Lupine	Varies	4" pots	Sun/Pt. Shade	N
<i>Lychnis chalconica</i>	Maltese Cross	24-36" X 12"	4" pots	Sun/Pt. Shade	*
<i>Monarda fistulosa</i>	Bee Balm	24-48" X 12"	4" pots	Lt. Shade	*
<i>Narcissus sp.</i>	Daffodil	12-18" X 12"	4" pots	Sun/Pt. Shade	*
<i>Nepeta x faassenii</i>	Catmint	12" X 18"	4" pots	Sun/Pt. Shade	*
<i>Oenothera macrocarpa</i>	Ozark Sundrops	6" X 24"	4" pots	Sun/Pt. Shade	*
<i>Opuntia polycantha</i>	Starvation Pricklypear	Varies	4" pots	Sun	N
<i>Papaver orientale</i>	Oriental Poppy	12-24" X 12-24"	4" pots	Sun	*
<i>Penstemon sp.</i>	Beard Tongue	Varies	4" pots	Sun/Pt. Shade	*
<i>Penstemon strictus</i>	Rocky Mountain Penstemon	24-36" X 24"	4" pots	Sun/Pt. Shade	*
<i>Perovoskia atriplicifolia</i>	Russian Sage	3-5' X 3-4'	4" pots	Sun	*
<i>Phlox subulata</i>	Moss Pink	6" X 18"	4" pots	Sun/Pt. Shade	*
<i>Pulsatilla vulgaris</i>	Pasque Flower	9-12" x 6-10"	4" pots	Sun/Pt. Shade	*
<i>Ratibida columnifera</i>	Mexican Hat	30" X 12"	4" pots	Sun	*
<i>Rudbeckia hirta</i>	Black-Eyed Susan	3-4' X 2'	4" pots	Sun	*
<i>Salvia nemerosa</i>	Meadow Sage	18-36" X 24-36"	4" pots	Sun	*
<i>Salvia officinalis</i>	Garden Sage	18-24" X 12-18"	4" pots	Sun	*
<i>Santolina chamaecyparissus</i>	Lavender Cotton	24" X 36"	4" pots	Sun	*
<i>Sanvitalia procumbens</i>	Creeping Zinnia	4-6" X 18"	4" pots	Sun	*
<i>Saponaria ocymides</i>	Soapwort	12" X 36"	4" pots	Sun	*
<i>Scutellaria resinosa</i>	Skullcap	6-8" X 12"	4" pots	Sun/Pt. Shade	*
<i>Sedum</i> 'Ruby Glow'	Ruby Glow Stonecrop	8" X 15"	4" pots	Sun	*
<i>Sedum spectabile</i>	Showy Stonecrop	18-24" X 10-15"	4" pots	Sun/Pt. Shade	*

PERENNIALS continued

NOTE: Min. size 4" pots, typ. Upon approval from the BMS-MPA, plugs or seed may be used.

Botanical Name	Common Name	Ht. X Sp.	Min. Size	Sun / Shade	Special Features
<i>Sempervivum sp.</i>	Hen & Chicks	2-4" X 6-12"	4" pots	Lt. Shade	*
<i>Sphaeralcea incana</i>	Orange Mallow	24-48" X 24"	4" pots	Sun	*
<i>Stachys byzantina</i>	Lamb's Ear	18" X 36"	4" pots	Sun/Pt. Shade	*
<i>Tanacetum vulare</i>	Tansy	36" X 24"	4" pots	Sun	*
<i>Teucrium x lucidrys</i>	Germander	12" X 24"	4" pots	Sun	*
<i>Thymus vulgaris</i>	Common Thyme	12" X 24"	4" pots	Lt. Shade	*
<i>Thymus vulgaris</i> 'Orange Balsam'	Orange Balsam Thyme	6-8" X 15"	4" pots	Lt. Shade	*
<i>Veronica sp.</i>	Speedwell	Varies	4" pots	Sun	*

DECIDUOUS TREES AND EVERGREEN TREES - SEE SECTION 11

↑ reposition text for proper alignment

SHRUBS

Botanical Name	Common Name	Ht. X Sp.	Min. Size	Sun / Shade	Special Features
<i>Aronia melanocarpa</i> 'Autumn Magic'	Black Chokeberry	3-5' X 3-5'	24-30" ht.	Sun/Pt. Shade	deciduous, spreading habit, serrated leave, edible black fruit, white/pink flower clusters
<i>Berberis thunbergii</i>	Japanese Barberry	4-6' X 4-6'	24-30" ht.	Sun	* deciduous, slender arching spiny branches, color varies based on variety
<i>Berberis t.</i> 'Crimson Pygmy'	Crimson Pygmy Japanese Barberry	1' X 3'	12-18" sp.	Sun	* deciduous, dwarf, deep red color in full sun
<i>Calluna vulgaris</i>	Scotch Heather	1-2' X 2'	12-18" sp.	Sun	evergreen, tiny scalelike green leaves, spikes covered in bell shaped flowers
<i>Chaenomeles sp.</i>	Flowering Quince	2-6' X 2-4'	24-30" ht./sp.	Sun	deciduous, habit varies, vibrant single to double flowers in late winter
<i>Chamaecyparis lawsoniana</i> 'Ellwoodii'	Dwarf Port Orford Cedar	6-8' X 2'	30-36" ht.	Sun	evergreen, dense compact habit, blue green foliage
<i>Cornus stolonifera</i>	Redtwig Dogwood	7-9' X 12'	30-36" ht.	Sun or Shade	N deciduous, open spreading habit, brilliant red fall foliage & winter twigs
<i>Cotinus coggyria</i>	Smoke Tree	12-15' X 12-15'	30-36" ht.	Sun	* deciduous, broad urn habit, round green to purple leaves, flower airy plumes
<i>Cotoneaster acutifolius</i>	Peking Cotoneaster	6-10' X 6-10'	30-36" ht.	Sun	* deciduous, fountain shaped habit, glossy green foliage, black fruit
<i>Cotoneaster parneyi</i>	Parneyi Cotoneaster	6' X 6'	30-36" ht./sp.	Sun/Pt. Shade	* evergreen, arching habit, dark green foliage, white flower clusters, red fruit
<i>Cotoneaster mircophyllus</i>	Rockspray Cotoneaster	2-3' X 15'	12-18" sp.	Sun/Pt. Shade	* evergreen, horizontal habit, tiny dark green leaves, white flowers, red fruit
<i>Daphne x burkwoodii</i>	Burkwood Daphne	3-4' X 3-4'	24-30" ht./sp.	Sun/Lt. Shade	evergreen, erect compact habit, abundant fragrant white to pink flower clusters
<i>Deutzia gracilis</i>	Slender Deutzia	2-4' X 3-4'	18-24" ht./sp.	Sun/Lt. Shade	deciduous, graceful arching habit, green toothed leaves, clusters of white flowers
<i>Erica sp.</i>	Heath	1-2' X 2'	12-18" sp.	Sun/Pt. Shade	evergreen, round habit, small needlelike leaves, abundant small bell flowers
<i>Euonymus alatus</i> 'Compacta'	Winged Euonymus	4-6' X 4-6'	24-30" ht.	Sun	deciduous, round habit, green wing shaped leaves, vibrant red-orange fall color
<i>Euonymus fortunei</i>	Winter Creeper	2-5' X 3-6'	24-30" ht./sp.	Sun/Pt. Shade	evergreen, habit varies, green to purple to yellow to variegated foliage color
<i>Forsythia hybrids</i>	Forsythia	5-9' X 4-8'	24-30" ht.	Sun	deciduous, fountain shaped habit, green foliage, bright yellow flowers along stems
<i>Hydrangea macrophylla</i>	Garden Hydrangea	4-8' X 4-8'	24-30" ht.	Pt. Shade	deciduous, round habit, green toothed foliage, huge flower clusters, color varies
<i>Hydrangea paniculata</i>	Panicle Hydrangea	5-10' X 5-10'	30-36" ht.	Pt. Shade	deciduous, upright spreading habit, oval green leaves, elongated flower clusters
<i>Ilex crenata</i> 'Convexa'	Compact Japanese Holly	4-6' X 4-6'	24-30" ht.	Sun/Pt. Shade	evergreen, dense round to erect habit, small green leaves, black berries
<i>Juniperus scopulorum</i> 'Skyrocket'	Skyrocket Juniper	10-15' X 2-3'	30-36" ht.	Sun/Pt. Shade	* evergreen, narrow columnar habit, blue-gray foliage
<i>Lavendula sp.</i>	Lavender	2' X 2'	12-18" ht.	Sun	* evergreen, round habit, small aromatic gray-green foliage, fragrant flowers
<i>Lonicera pileata</i>	Privet Honeysuckle	2-3' X 8'	18-24" sp.	Sun/Pt. Shade	* evergreen, spreading habit, green foliage, small fragrant white flowers, berries
<i>Paeonia sp.</i>	Peony	2-4' X 2-4'	12-18" ht./sp.	Sun/Pt. Shade	deciduous, arching habit, green divided leaves, amazing single or double flowers
<i>Perovskia atriplicifolia</i> 'Blue Spire'	Russian Sage	2-4' X 2-4'	12-18" ht./sp.	Sun	* evergreen, upright habit, gray-green foliage, tall showy purple flower stems
<i>Philadelphus lewisii</i>	Mock Orange	4-10' X 4-10'	30-36" ht.	Sun/Pt. Shade	deciduous, fountain shaped habit, abundant fragrant white flowers
<i>Picea abies</i> 'Nidiformis'	Bird's Nest Spruce	3-5' X 4-6'	18-24" ht.	Sun	evergreen, low dense habit, gray-blue foliage, needles in star shapes whorl
<i>Pieris japonica</i>	Lily-of-the-Valley Shrub	2-6' X 2-6'	24-30" ht.	Sun/Pt. Shade	evergreen, upright habit, bronze new foliage to green, drooping flower clusters
<i>Pinus mugo</i> 'Pumilio'	Dwarf Mugo Pine	4-8' X 4-8'	18-24" ht./sp.	Sun/Pt. Shade	* evergreen, round compact habit, dark green foliage
<i>Rosa nutkana</i>	Nootka Rose	6' X 4'	24-30" ht.	Sun/Pt. Shade	* deciduous, arching habit, deep pink flowers in spring, showy rose hips follow
<i>Rosa rugosa</i>	Rugosa Rose	3-6' X 3-6'	24-30" ht.	Sun	* deciduous, open habit, single to double flowers in spring-fall, huge red rose hips

SHRUBS continued

Botanical Name	Common Name	Ht. X Sp.	Min. Size	Sun / Shade	Special Features
<i>Salvia argentea</i>	Silver Sage	1-2' X 2'	12-18" ht.	Sun	deciduous, upright habit, gray-green foliage, hooded white flowers on stems
<i>Sedum 'Autumn Joy'</i>	Autumn Joy Stonecrop	1-2' X 2'	12-18" ht.	Sun/Pt. Shade	* succulent, upright habit, green foliage, clusters of pink flowers in late summer
<i>Spiraea japonica</i>	Spiraea	2-5' X 2-5'	18-24" ht.	Sun	deciduous, upright habit, toothed foliage, 8" clusters of pink flowers summer-fall
<i>Syringa vulgaris</i>	Common Lilac	8-20' X 6-15'	30-36" ht.	Sun	* deciduous, open upright habit, profuse fragrant conical shaped flower clusters
<i>Viburnum plicatum tomentosum</i>	Doublefile Viburnum	4-6' X 4-6'	24-30" ht.	Sun	deciduous, tiered habit, dull dark green foliage, white snowball flower clusters
<i>Yucca filamentosa</i>	Adam's Needle Yucca	1-7' X 1-4'	12-18" ht./sp.	Sun	* evergreen, stiff round habit, dark green foliage, 3-5' tall white flower clusters

GROUNDCOVERS

Botanical Name	Common Name	Ht. X Sp.	Min. Size	Sun / Shade	Special Features
<i>Aegopodium variegatum</i>	Bishop's Weed	6"	1 gal.	Sun/Pt. Shade	* perennial, light green edged white 3 leaflet leaves, fast growing
<i>Archostaphylos uva-ursi</i>	Kinnikinnick	3-6' X 2-3'	1 gal.	Sun/Pt. Shade	* N evergreen, small glossy dark green leaves, white or pink flowers, red fruit
<i>Cerastium tomentosum</i>	Snow-In-Summer	6-8"	1 gal.	Lt. Shade	* perennial, silver gray leaves, small white flowers in summer, fast growing
<i>Galium odoratum</i>	Sweet Woodruff	3"	1 gal.	Shade	* perennial, aromatic green whorl leaves, tiny white flower clusters summer
<i>Helianthemum nummularium</i>	Sunrose	6-8" X 36"	1 gal.	Sun	* evergreen, gray-green leaves, single or double vibrant or light color flowers
<i>Juniperus horizontalis</i>	Creeping Juniper	1' X 8-10'	18-24" sp.	Sun/Pt. Shade	* evergreen, feathery gray-green foliage, fast growing
<i>Mahonia repens</i>	Creeping Mahonia	12" X 36"	1 gal.	Sun/Pt. Shade	* evergreen, spiny edged leaves to divided blue-green leaflets, flower clusters
<i>Sedum spurium</i>	Two-Row Stonecrop	3-6' X 12-24"	1 gal.	Sun	* succulent, dark green or bronze leaves, clusters of pink flowers in summer
<i>Thymus serpyllum</i>	Creeping Thyme	3" X 36"	1 gal.	Lt. Shade	* perennial, round dark green leaves, purple flowers in summer
<i>Thymus pseudolanuginosus</i>	Woolly Thyme	2-3" X 36"	1 gal.	Lt. Shade	* perennial, walkable mat habit, woolly gray leaves, pink flowers in midsummer
<i>Veronica pectinata</i>	Blue Woolly Speedwell	ground hugging	1 gal.	Sun/Pt. Shade	* perennial, small deeply cut gray leaves, profuse deep blue flowers in spring
<i>Vinca minor</i>	Dwarf Periwinkle	4" X 36"	1 gal.	Sun/Pt. Shade	* evergreen, trailing dark green leaves, lavender-blue 5 petal flowers in spring

ORNAMENTAL GRASSES

Botanical Name	Common Name	Ht. X Sp.	Min. Size	Sun / Shade	Special Features
<i>Bouteloua curtipendula</i>	Sideoats Grama Grass	1-2' X 2'	1 gal.	Sun	* narrow gray-green leaf clumps, one-sided flowering stems in summer
<i>Bouteloua gracilis</i>	Blue Grama Grass	1-2' X 1'	1 gal.	Sun	* inflorescence of flowers at right angles, red in summer, bleached to white
<i>Calamagrostis x acutiflora</i>	Feather Reed Grass	2-6' X 2-3'	1 gal.	Sun/Pt. Shade	* evergreen, erect clump of narrow green leaves, upright flower stems
<i>Carex morrowii expallida</i>	Variegated Japanese Sedge	1-2' X 2'	1 gal.	Sun/Pt. Shade	mounding habit, green and white striped drooping leaves
<i>Deschampsia cespitosa</i>	Tufted Hair Grass	1-2' X 2'	1 gal.	Sun/Pt. Shade	narrow dark green leaf clumps, airy inflorescences in late spring to early summer
<i>Festuca glauca</i>	Blue Fescue	1' X 1'	1 gal.	Sun	* dense extremely fine blue-silver leaves, flower spikes in summer
<i>Helictotrichon sempervirens</i>	Blue Oat Grass	2-3' X 2-3'	1 gal.	Sun	* narrow fountain like blue-gray leaf clumps, wispy straw colored flower clusters
<i>Imperata cylindrica</i>	Japanese Blood Grass	1-2' X 1'	1 gal.	Sun/Pt. Shade	upright medium leaf clumps, green at base, red at tip & intensifies in summer-fall
<i>Miscanthus sinensis</i>	Maiden Hair Grass	2-3' X 2-3'	1 gal.	Sun/Pt. Shade	* mounding green leaf clumps, colorful flower plumes in summer-fall
<i>Pennisetum alopecuroides</i>	Fountain Grass	2-3' X 2-3'	1 gal.	Sun/Pt. Shade	* bright green leaf clumps, pinkish to oat colored rabbit tail-like flower plumes
<i>Pennisetum setaceum</i>	Fountain Grass	2-4' X 2-3'	1 gal.	Sun/Pt. Shade	* green leaf clumps, copper-pink to purplish tall flower plumes
<i>Pennisetum setaceum 'Rubrum'</i>	Red Fountain Grass	2-4' X 2-3'	1 gal.	Sun/Pt. Shade	* reddish bronze leaf clumps, copper-pink to purplish tall flower plumes
<i>Stipa tenuifolia</i>	Silky Thread Grass	2' X 1'	1 gal.	Sun	* green leaf clumps, large feather-like straw colored inflorescences
<i>Stipa tenuissima</i>	Mexican Feather Grass	1-2' X 1-2'	1 gal.	Sun/Pt. Shade	* bronze to green leaf clumps, airy feather-like straw colored inflorescences

VINES

Botanical Name	Common Name	Ht. X Sp.	Min. Size	Sun / Shade	Special Features
<i>Akebia quinata</i>	Fiveleaf Akebia	15-30'	1 gal.	Sun or Shade	deciduous, deep green leaflets, wine purple clusters of vanilla scented flowers
<i>Campsis radicans</i>	Trumpet Vine	30'	1 gal.	Sun/Pt. Shade	* deciduous, green multiple leaflets, 3" long orange tubular flowers with red lobes
<i>Clematis armandii</i>	Evergreen Clematis	20-35'	1 gal.	Sun	* evergreen, divided glossy green leaves, fragrant white flower clusters
<i>Clematis ligusticifolia</i>	Clematis	20'	1 gal.	Sun	* deciduous, green lobed leaves, multiple flower colors & sizes
<i>Hydrangea anomala petiolaris</i>	Climbing Hydrangea	20-30'	1 gal.	Sun/Pt. Shade	* deciduous, green heart shaped leaves, large white lace-cap flowers
<i>Lonicera japonica</i>	Japanese Honeysuckle	20-30'	1 gal.	Sun/Pt. Shade	* semievergreen, oval deep green leaves, fragrant two-lobed pink-white flowers
<i>Lonicera sempervirens</i>	Trumpet Honeysuckle	10-20'	1 gal.	Sun/Pt. Shade	semievergreen, whorls of orange-yellow to red trumpet shaped flowers in spring
<i>Parthenocissus tricuspidata</i>	Boston Ivy	50'	1 gal.	Sun or Shade	* glossy toothed edged 3-lobed leaves, orange to wine red fall color
<i>Wisteria sinensis</i>	Chinese Wisteria	Varies	1 gal.	Sun or Shade	* green leaves divided into 7-13 leaflets, profuse violet-blue drooping flowers

ROCK GARDEN PLANTS

Botanical Name	Common Name	Ht. X Sp.	Min. Size	Sun / Shade	Special Features
<i>Achillea millefolium</i>	Common Yarrow	30-36" X 24"	1 gal.	Sun	* perennial, erect habit, narrow green-gray leaves, flat topped white flowers
<i>Aethionema schistosum</i>	Stonecress	5-10" X 12"	1 gal.	Sun	* perennial, erect habit, narrow gray-blue leaves, fragrant soft pink flowers
<i>Anacyclus depressus</i>	Mount Atlas Daisy	3" X 15"	1 gal.	Sun	* perennial, spreading habit, gray fine leaves, daisylike flowers in summer
<i>Armeria maritima</i> 'Compacta'	Common Thrift	6" X 12"	1 gal.	Sun	* perennial, compact habit, thinleaves, pink globe of flower clusters atop stem
<i>Delosperma cooperi</i>	Purple Hardy Ice Plant	3" X 24"	1 gal.	Lt. Shade	* succulent, spreading habit, cylindrical green leaves, purple flowers in summer
<i>Delosperma nubigenum</i>	Yellow Hardy Ice Plant	1" X 36"	1 gal.	Lt. Shade	* succulent, low habit, cylindrical green leaves turn red in fall, yellow flowers
<i>Iberis sempervirens</i>	Evergreen Candytuft	8-18" X 8-18"	1 gal.	Sun/Pt. Shade	* evergreen perennial, glossy dark green leaves, white flower clusters
<i>Linum flavum</i> 'Compactum'	Compact Golden Flax	6" X 6"	1 gal.	Sun	* perennial, erect habit, green leaves, yellow 5 petal flowers in spring-summer
<i>Penstemon rupicola</i>	Rock Penstemon	4" X 18"	1 gal.	Sun/Pt. Shade	* perennial, trailing habit, small round blue-green leaves, bright pink flowers
<i>Phlox subulata</i>	Moss Pink	6" X 18"	1 gal.	Sun/Pt. Shade	* perennial, spreading habit, needlelike evergreen leaves, pink-lavender flowers
<i>Sedum spathifolium</i> 'Cape Blanco'	Cape Blanco Sedum	3" X 12"	1 gal.	Sun/Pt. Shade	* succulent, spreading habit, spoon shaped blue-green leaves tinged red-purple
<i>Sedum</i> 'Vera Jameson'	Vera Jameson Sedum	8-12" X 15"	1 gal.	Sun/Pt. Shade	* succulent, spreading habit, purple stems w/ pinkish purple leaves, pink flowers

EVERGREEN HEDGE PLANTS

Botanical Name	Common Name	Ht. X Sp.	Min. Size	Sun / Shade	Special Features
<i>Berberis x gladwynensis</i> 'William Penn'	William Penn Barberry	4-5' X 4-5'	24-30" ht.	Sun	broad glossy leaf, fast growth, dense foliage, pretty yellow flowers
<i>Buxus sempervirens</i> 'Suffruticosa'	True Dwarf Common Boxwood	4-5' X 4-5'	24-30" ht.	Sun or Shade	slow growth, small waxy dense form and texture leaf
<i>Daphne x burkwoodii</i>	Burkwood Daphne	3-4' X 3-4'	24-30" ht./sp.	Sun/Lt. Shade	erect compact habit, abundant fragrant white to pink flower clusters
<i>Euonymus fortunei</i>	Winter Creeper	2-5' X 3-6'	24-30" ht./sp.	Sun/Pt. Shade	habit varies, green to purple to yellow to variegated foliage color
<i>Ilex crenata</i> 'Convexa'	Compact Japanese Holly	4-6' X 4-6'	24-30" ht.	Sun/Pt. Shade	dense round to erect habit, small green leaves, black berries
<i>Juniperus x pfitzeriana</i> 'Armstrongii'	Armstrong Juniper	4-5' X 4-5'	24-30" ht.	Sun	upright habit, true green foliage, compact growth
<i>Taxus baccata</i> 'Adpressa'	Dwarf English Yew	4-5' X 6-8'	24-30" ht.	Sun or Shade	dense habit, rich dark green needles, compact growth, red fruit
<i>Thuja occidentalis</i> 'Hetz Midget'	Dwarf Arborvitae	3-4' X 3-4'	24-30" ht.	Sun/Pt. Shade	globe habit, dense green foliage, maintains form
<i>Viburnum hybrids</i> 'Conoy'	Conoy Evergreen Viburnum	4-5' X 4-5'	24-30" ht.	Sun/Pt. Shade	dense habit, dark green foliage with white on underside, fragrant flowers, red berries